


- PLAN KEYED NOTES**
- 01 EXTERIOR MENU BOARD, COORDINATE MOUNTING HEIGHT AND REQUIREMENTS WITH OWNER PRIOR TO ROUGH IN
 - 02 RECESSED WALK OFF MAT, SEE A6.01 AND A6.02 FOR ENLARGED PLAN AND DETAILS
 - 03 LADDER TO ROOF
 - 04 COORDINATE WALL PASS THROUGH LOCATIONS/SIZES AND EQUIPMENT BLOCKING REQUIREMENTS WITH FOOD SERVICE DRAWINGS
 - 05 ENTRY OF SPRINKLER MAIN & RISER, COORDINATE WITH CIVIL. DESIGN OF SPRINKLER SYSTEM DELEGATED DESIGN BY SPRINKLER CONTRACTOR
 - 06 BOOTHS / PARTIAL HEIGHT WALLS / MILLWORK SHOWN FOR REFERENCE ONLY - SEE ID DWGS
 - 07 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL "AESS" AT EXTERIOR CANOPY STEEL
 - 08 ARCHITECTURALLY EXPOSED STRUCTURAL STEEL "AESS" AS ADO ALTERNATE FOR EXPOSED STEEL COLUMNS AND BEAMS IN PUBLIC SPACES
 - 09 STAINLESS STEEL RAILINGS WITH GLASS INFILL AS SPECIFIED
 - 10 SELF CLOSING GATES BY ALUMINUM RAILING W/IR AS REQUIRED BY OWNER FOR SECURITY PURPOSES. PROVIDE PANG HARDWARE ON GRESS ROUTES
 - 11 NOT USED
 - 12 SECURITY FENCING AND GATES AROUND BUILDINGS PER CIVIL N.I.C.
 - 13 CONTINUOUS TRENCH DRAIN PER PLUMBING COORDINATE WITH STRUCTURAL
 - 14 CASE EMPTY OPENING WITH FLAT STOCK PAINTED WOOD
 - 15 AUTOMATIC DOOR OPERATOR PUSH BUTTON
 - 16 GC TO PROVIDE A 6" DIA. PVC TUBE X 3' LONG WITH A CAPPED BOTTOM END AND SCREW OFF TOP FOR STORAGE OF A COPY OF AS-BUILT BUILDING PLANS. SECURE TO WALL IN MECHANICAL AREA FOR EASY ACCESS.
 - 17 PAINT WALLS AROUND COOLERS W/ ONE COAT OF WHITE SEMI-GLOSS UP TO 9'-0" A.F.F.
 - 18 SEE 4H/A6.11 FOR WALL SECTION DETAIL
 - 19 SEE 1H/A6.11 FOR WALL SECTION DETAIL
 - 20 SEE 7D/9.01 FOR LIGHT DETAIL
 - 21 SEE ELECTRICAL FOR REQUIRED LOCATIONS
 - 22 POLE MOUNTED LIGHT SEE ELECTRICAL
 - 23 5/8" FIRE RETARDANT TREATED PLYWOOD BACKING FROM 2'-0" TO 8'-0" AFF BEHIND KITCHEN EQUIPMENT AS REQUIRED (SEE DASHED LINE - - - - - FOR LOCATIONS). PROVIDE STEEL PLATING BELOW THE HOOD AND OTHER REQUIRED LOCATIONS (I.E. BROILER, HAND SINKS, WITHIN 18" OF HOOD)
 - 24 SCENT AIR SYSTEM (7'-0" AFF) BY OWNER. RECEPTACLES BY E.C.
 - 25 SERVICE ENTRY RAMP PER CIVIL CONTINUE SLOPING DOWN RAMP AND PROVIDE HANDRAIL ABOVE. FULLY SECURE TO EXTERIOR WALL AND PAINT ALL FASTENING STRAPS TO MATCH. SEE PLUMBING FOR ROUTING.
 - 26 PIPE BOLLARD
 - 27 DUMPSTER GATE & HARDWARE BY GATE MFR. PROVIDE STEEL FRAME WITH CEDAR PLANK INFILL AS SPECIFIED
 - 28 BROOM FINISH CONCRETE WITH DECK COATING AS SPECIFIED
 - 29 6" CONCRETE PAD LOCATED BENEATH BOOTH
 - 30 PROVIDE CLOSURE PANEL AROUND COLUMN TO BOOTH HEIGHT. FINISH TO MATCH BOOTH. SEE ID
 - 31 PROVIDE 2" CLEAR REVEAL AT INTERSECTION OF ALL SITE WALLS & BUILDING

- GENERAL PLAN NOTES**
1. ALL WORK SHALL BE CONSTRUCTED IN ACCORDANCE WITH 2012 NCSBC AND ANY LOCAL CODES. CLEARANCES AND ACCESSIBILITY SHALL COMPLY WITH ANSI A117.1.
 2. ALL PLAN DIMENSIONS ARE TO FACE OF WALL OR MASONRY UNLESS NOTED OTHERWISE. EXTERIOR DIMENSIONS ARE TO FACE OF MASONRY OR SHEATHING, UNLESS NOTED OTHERWISE.
 3. INTERIOR PARTITION TYPES ARE KEYED ON PLANS THUSLY: (C) - SEE SHEET A1.01 FOR PARTITION TYPES AND RELATED DETAILS. SEE LIFE SAFETY DRAWINGS FOR FIRE RESISTANCE REQUIREMENTS FOR PARTITIONS.
 4. SEE LIFE SAFETY DRAWINGS FOR FIRE RESISTANCE REQUIREMENTS. SEE SHEET A1.01 FOR PARTITION TYPES AND RELATED DETAILS.
 5. SEE SPECS FOR FIRE EXTINGUISHER CABINETS.
 6. REFER TO ENLARGED PLANS FOR ADDITIONAL DETAILED INFORMATION INCLUDING DIMENSIONS, TOILET ACCESSORIES, WALL TAGS, & DOOR TAGS.
 7. PLANS ARE ROTATED FOR CLARITY. REFER TO NORTH ARROWS FOR ACTUAL ORIENTATION.
 8. PROVIDE CONTROL JOINTS IN GYPSUM BOARD PARTITIONS AT 30'-0" MAX. LOCATIONS SHALL BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION. GYPSUM CONTROL JOINTS TO BE LOCATED AT DOOR FRAME CORNERS WHERE APPLICABLE. GYPSUM BOARD CONTROL JOINTS IN RATED WALLS TO HAVE GYPSUM BOARD BACKING PANELS PER U.L. REQUIREMENTS. COORDINATE COLOR W/ ARCHITECT.
 9. REFER TO CIVIL AND STRUCTURAL DRAWINGS FOR ADDITIONAL INFORMATION AND UTILITY PADS FOR EQUIPMENT, WALKWAYS, ETC.
 10. COORDINATE MASONRY CONTROL JOINTS (MCJ) SHOWN IN PLAN AND ELEVATION WITH VENEER COURSING.
 11. DISTANCE FROM BACK OF HINGE SIDE FRAME TO WALL SHALL BE 4" CLEAR, U.N.O. FOR INTERIOR HOLLOW METAL FRAMES. DIMENSION ON FULL SIDE OF DOOR TO WALL SHALL BE 18".
 12. FIRMLY PACK VOIDS AT METAL DECK FLUTES WITH MINERAL WOOL BATT INSULATION AT ALL EXTERIOR WALL APPLICATIONS.
 13. SEE ID DRAWINGS FOR LIGHT LOCATIONS, INTERIOR ELEVATIONS, MILLWORK, FINISH SCHEDULES AND FURNITURE TYPICAL
 14. MAINTAIN A 1"-3" AIRSPACE BETWEEN COOLER WALLS AND FINISHED BUILDING WALLS (1" MIN.). COOLERS ARE NOT TO BUTT UP AGAINST BUILDING WALLS.
 15. FILL PORTS FOR CO2 AND OIL TANKS TO BE INSTALLED BY GC. COORDINATE REQUIREMENTS WITH TANK MFRS.
 16. GC RESPONSIBLE FOR SUPPLYING AND INSTALLING CHAIN TO SECURE PORTABLE NOZ & CO2 (2 EACH) TANKS TO WALL. COORDINATE LOCATIONS W/ OWNER.
 17. PROVIDE FIRE RETARDANT TREATED PLYWOOD BACKING AT ALL WALL MOUNTED TV LOCATIONS. SEE A/V DRAWINGS FOR LOCATIONS AND CONFIRM FINAL PLACEMENT WITH OWNER/OPERATOR PRIOR TO INSTALLATION.

- GENERAL ROOF NOTES**
1. ROOF LEADERS TO BE INSULATED.
 2. ROOF LEADERS ARE TO RUN DOWN THROUGH THE BUILDING ASSEMBLY AND CONCEALED. G.C. TO COORDINATE EXACT LOCATION.
 3. PRIMARY ROOF LEADERS TO BE COLLECTED AND TIED INTO STORM SEWER SYSTEM. REFER TO CIVIL DWGS. FOR ADDITIONAL NOTES. OVERFLOW LEADERS TO BE OUTLET ABOVE GRADE IN VISIBLE LOCATIONS. SEE ELEVATIONS.
 4. CONTRACTOR TO VERIFY LOCATION OF ALL ROOF PENETRATIONS PRIOR TO INSTALLATION AND INCLUDE PENETRATIONS IN SHOP DRAWINGS.
 5. PENETRATION DETAILS SHOWN ARE TO BE APPROVED BY ROOFING MANUFACTURER.
 6. ROOFING DETAILS TO COMPLY WITH THE LATEST EDITION OF SMOCA & NRCA MANUAL.
 7. SEE A6.20 FOR TYP. ROOF DRAWING DETAILS.
 8. ALL COPINGS TO BE FASTENED PER ANSI SPRI ES-1 STANDARDS.
 9. WIND UPLIFT RATINGS TO BE VERIFIED WITH STRUCTURAL DESIGN CRITERIA, BUILDING HEIGHTS, PARAPET CONDITIONS, ETC. SEE SPECIFICATIONS AND STRUCTURAL DESIGN CRITERIA.
 10. PROVIDE ADDITIONAL LAYER OF 80 MIL TPO AROUND ALL GREASE HOODS TYPICAL (10'X10' MINIMUM).
 11. PROVIDE LIGHTNING PROTECTION PER SPECIFICATIONS, SHOP DRAWING LAYOUT TO BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION.
 12. GC TO COORDINATE ANY OWNER PROVIDED ROOFTOP EQUIPMENT NOT IN THE ARCHITECTS SCOPE OF WORK. LOCATIONS TO BE COORDINATED WITH ALL OTHER EQUIPMENT AND ATTACHMENT METHODS TO MEET PROJECT WIND REQUIREMENTS.



revisions

RIVERFRONT FOOD & BEVERAGE COMPLEX

Copyright 2012
CJMW Architecture, PA


VIDA
MEZZANINE FLOOR PLAN

sheet


A2.05

PLAN NORTH TRUE NORTH


date: APRIL 10, 2013
commission: 12-0050
drawn by:

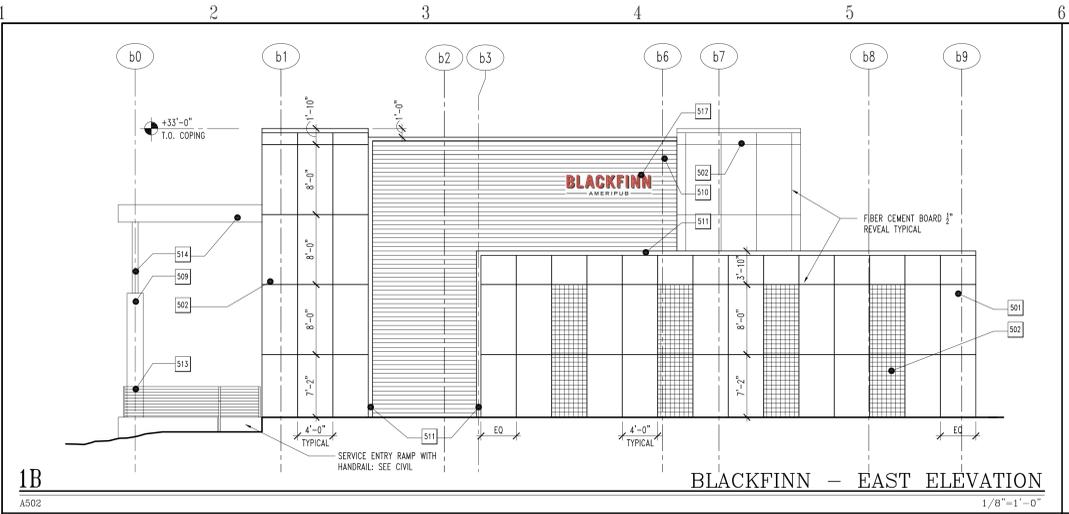


1B BLACKFINN – EAST ELEVATION
A502 1/8"=1'-0"

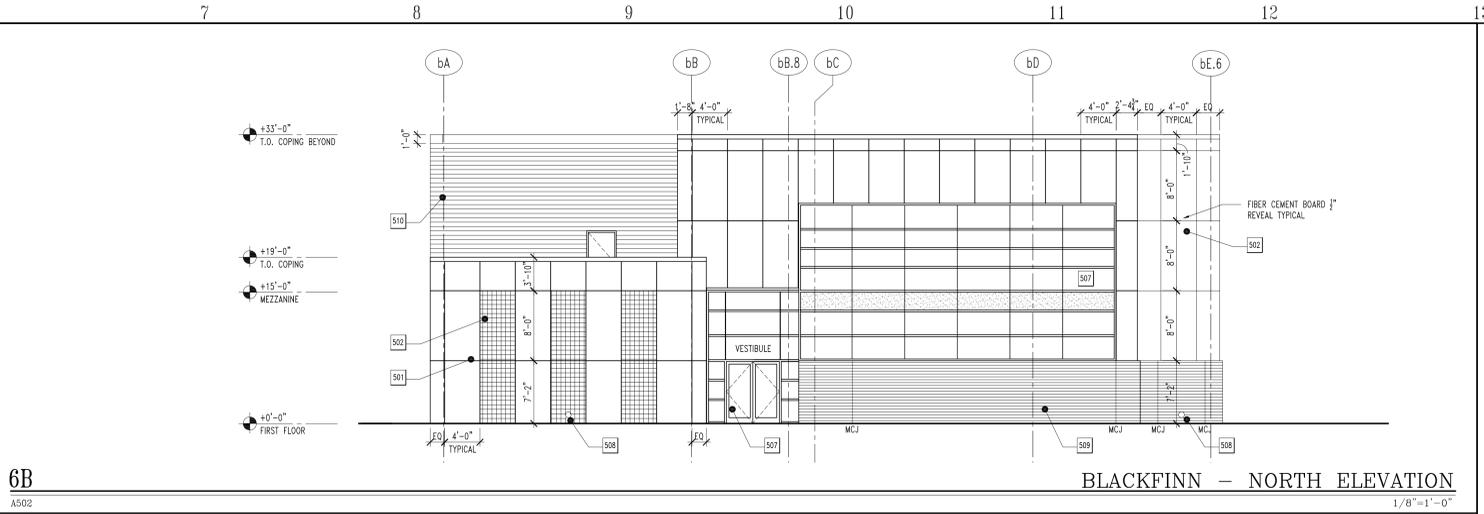


6B BLACKFINN – NORTH ELEVATION
A502 1/8"=1'-0"

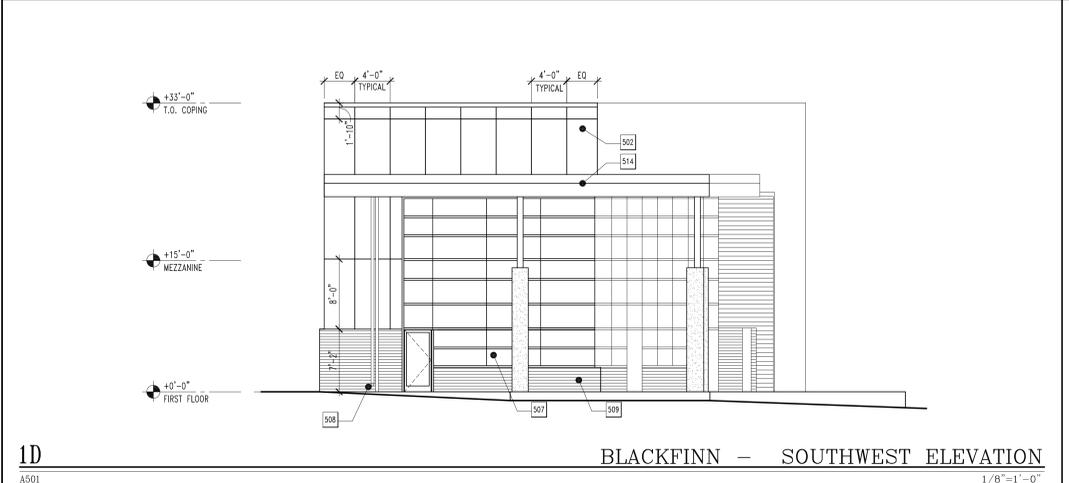


1D BLACKFINN – SOUTHWEST ELEVATION
A501 1/8"=1'-0"

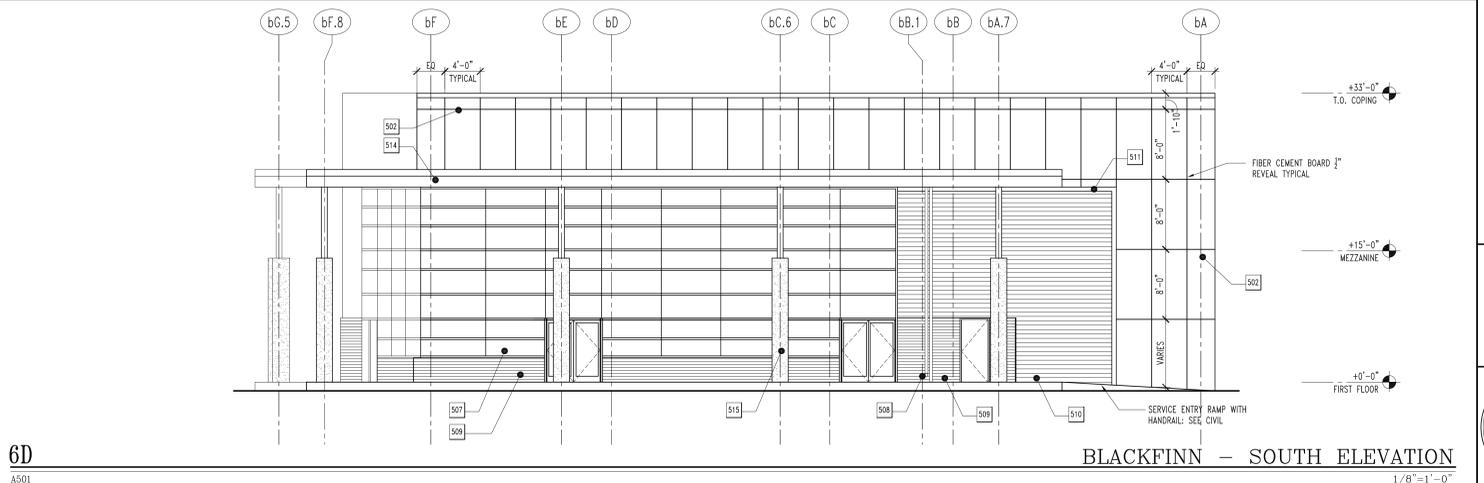


6D BLACKFINN – SOUTH ELEVATION
A501 1/8"=1'-0"

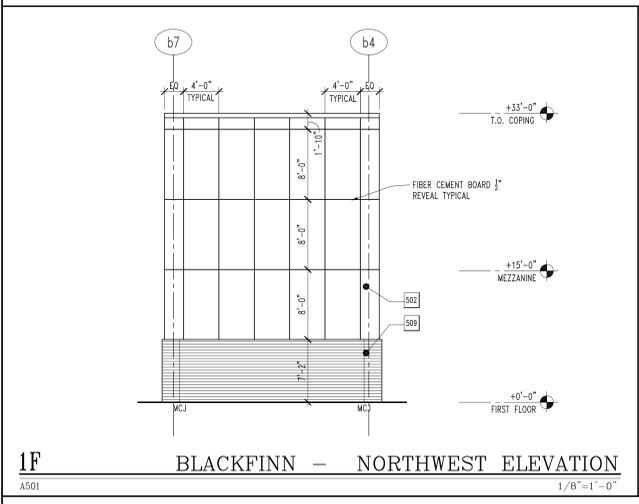


1F BLACKFINN – NORTHWEST ELEVATION
A501 1/8"=1'-0"

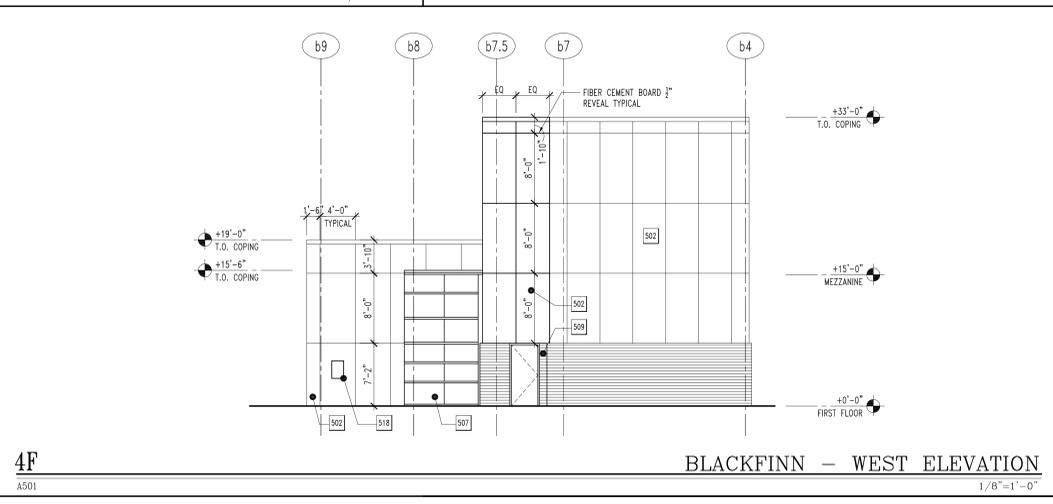

4F BLACKFINN – WEST ELEVATION
A501 1/8"=1'-0"

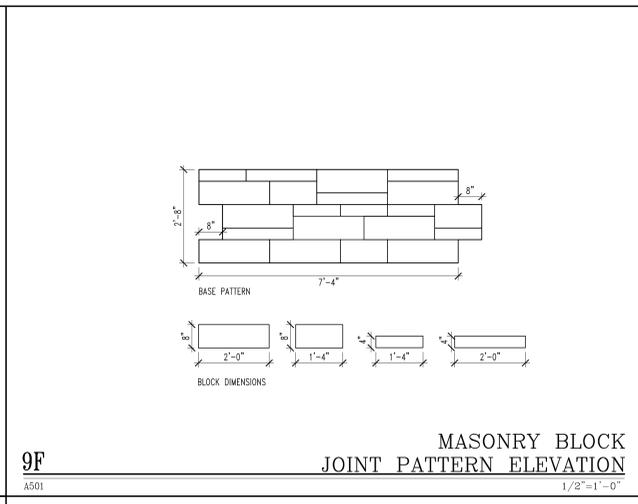

9F MASONRY BLOCK JOINT PATTERN ELEVATION
A501 1/2"=1'-0"



9H MOCK-UP PANEL ELEVATION
A501 1/4"=1'-0"

GENERAL NOTES

- EXTENTS OF RAILING NOT SHOWN FOR CLARITY, SEE PLANS FOR LOCATIONS AND A7.04 FOR LAYOUT GUIDELINES
- COORDINATE MASONRY CONTROL JOINTS (MCJ) SHOWN IN ELEVATION WITH CMU MANUFACTURER REQUIREMENTS
- ELEVATION NAMES REFER TO ORIENTATION ON DRAWINGS AND NOT CARDINAL DIRECTIONS

KEY TO MATERIALS

- 501 FIBER CEMENT PANEL – COLOR 1 BENJAMIN MOORE BUNNY GRAY 2124-50, REVEALS AND FASTENERS PAINTED TO MATCH PANEL
- 502 FIBER CEMENT PANEL – COLOR 2 BENJAMIN MOORE 2124-30 DEEP SILVER, REVEALS AND FASTENERS PAINTED TO MATCH PANEL
- 503 FIBER CEMENT PANEL – COLOR 1 BENJAMIN MOORE BUNNY GRAY 2124-50, REVEALS AND FASTENERS CLEAR ANODIZED / NOT PAINTED
- 504 OWNER PROVIDED GRAPHIC APPLIED OVER FIBER CEMENT PANEL
- 505 EXTERIOR INSULATION FINISHING SYSTEM (EFS) COLOR 1: TWILIGHT GRAY (DRYVIT) TEXTURE 1: QUARTZPUTZ (DRYVIT)
- 506 EXTERIOR INSULATION FINISHING SYSTEM (EFS) COLOR 2: WINTER EVE (DRYVIT) TEXTURE 2: SANDPEBBLE FINE (DRYVIT)
- 507 CLEAR ANODIZED CURTAIN WALL
- 508 OVERFLOW DRAIN OUTLET
- 509 POLISHED CMU VENEER, E. DILLON COMPANY REFLECTIVE SERIES, COLOR: BLUE ICE
- 510 6" 18G RED CEDAR PLANK
- 511 6" ALUMINUM REVEAL
- 512 EXTERIOR PAINTED STEEL AT VIDA BALCONY AND FREESTANDING CANOPY (AESS CLASSIFICATION) COLOR: BENJAMIN MOORE FLAME 2012-20
- 513 ALUMINUM RAIL SYSTEM, TYP.
- 514 EXTERIOR PAINTED STEEL AT BLACKFINN CANOPY (AESS CLASSIFICATION) COLOR: BENJAMIN MOORE WROUGHT IRON 2124-10
- 515 DUMPSTER WALL & GATE (PER CIVIL), DO NOT TIE SITE WALL INTO BUILDING
- 516 TABBY COAT STUCCO ON CMU (SEE SECTIONS)
- 517 PLYWOOD BACKING AT SIGN LOCATIONS, TYP. COORDINATE SIZE AND LOCATION WITH OWNER PRIOR TO ROUGH IN
- 518 MENU BOARD, COORDINATE SIZE AND LOCATION WITH OWNER PRIOR TO ROUGH IN
- 519 CLEAR ANODIZED ALUMINUM DOWNSPOUTS
- 520 LOUVER PER MECHANICAL, PAINT TO MATCH EXTERIOR VENEER, CENTER IN PANELS

PERMIT SET

CJMW ARCHITECTURE
CERT. NO. 50556
Winston-Salem, NC

PETER A. FALL
REGISTERED ARCHITECT
11504
Winston-Salem, NC

revisions

RIVERFRONT FOOD & BEVERAGE COMPLEX

Copyright 2012
CJMW Architecture, PA

EXTERIOR ELEVATIONS

sheet

A5.01

date: APRIL 10, 2013
commission: 12-0050
drawn by:

