



APPROVED CONSTRUCTION PLAN
 DATED: 3/11/21
 PROJECT #: 2020054
 STORMWATER PERMIT #: 2021012

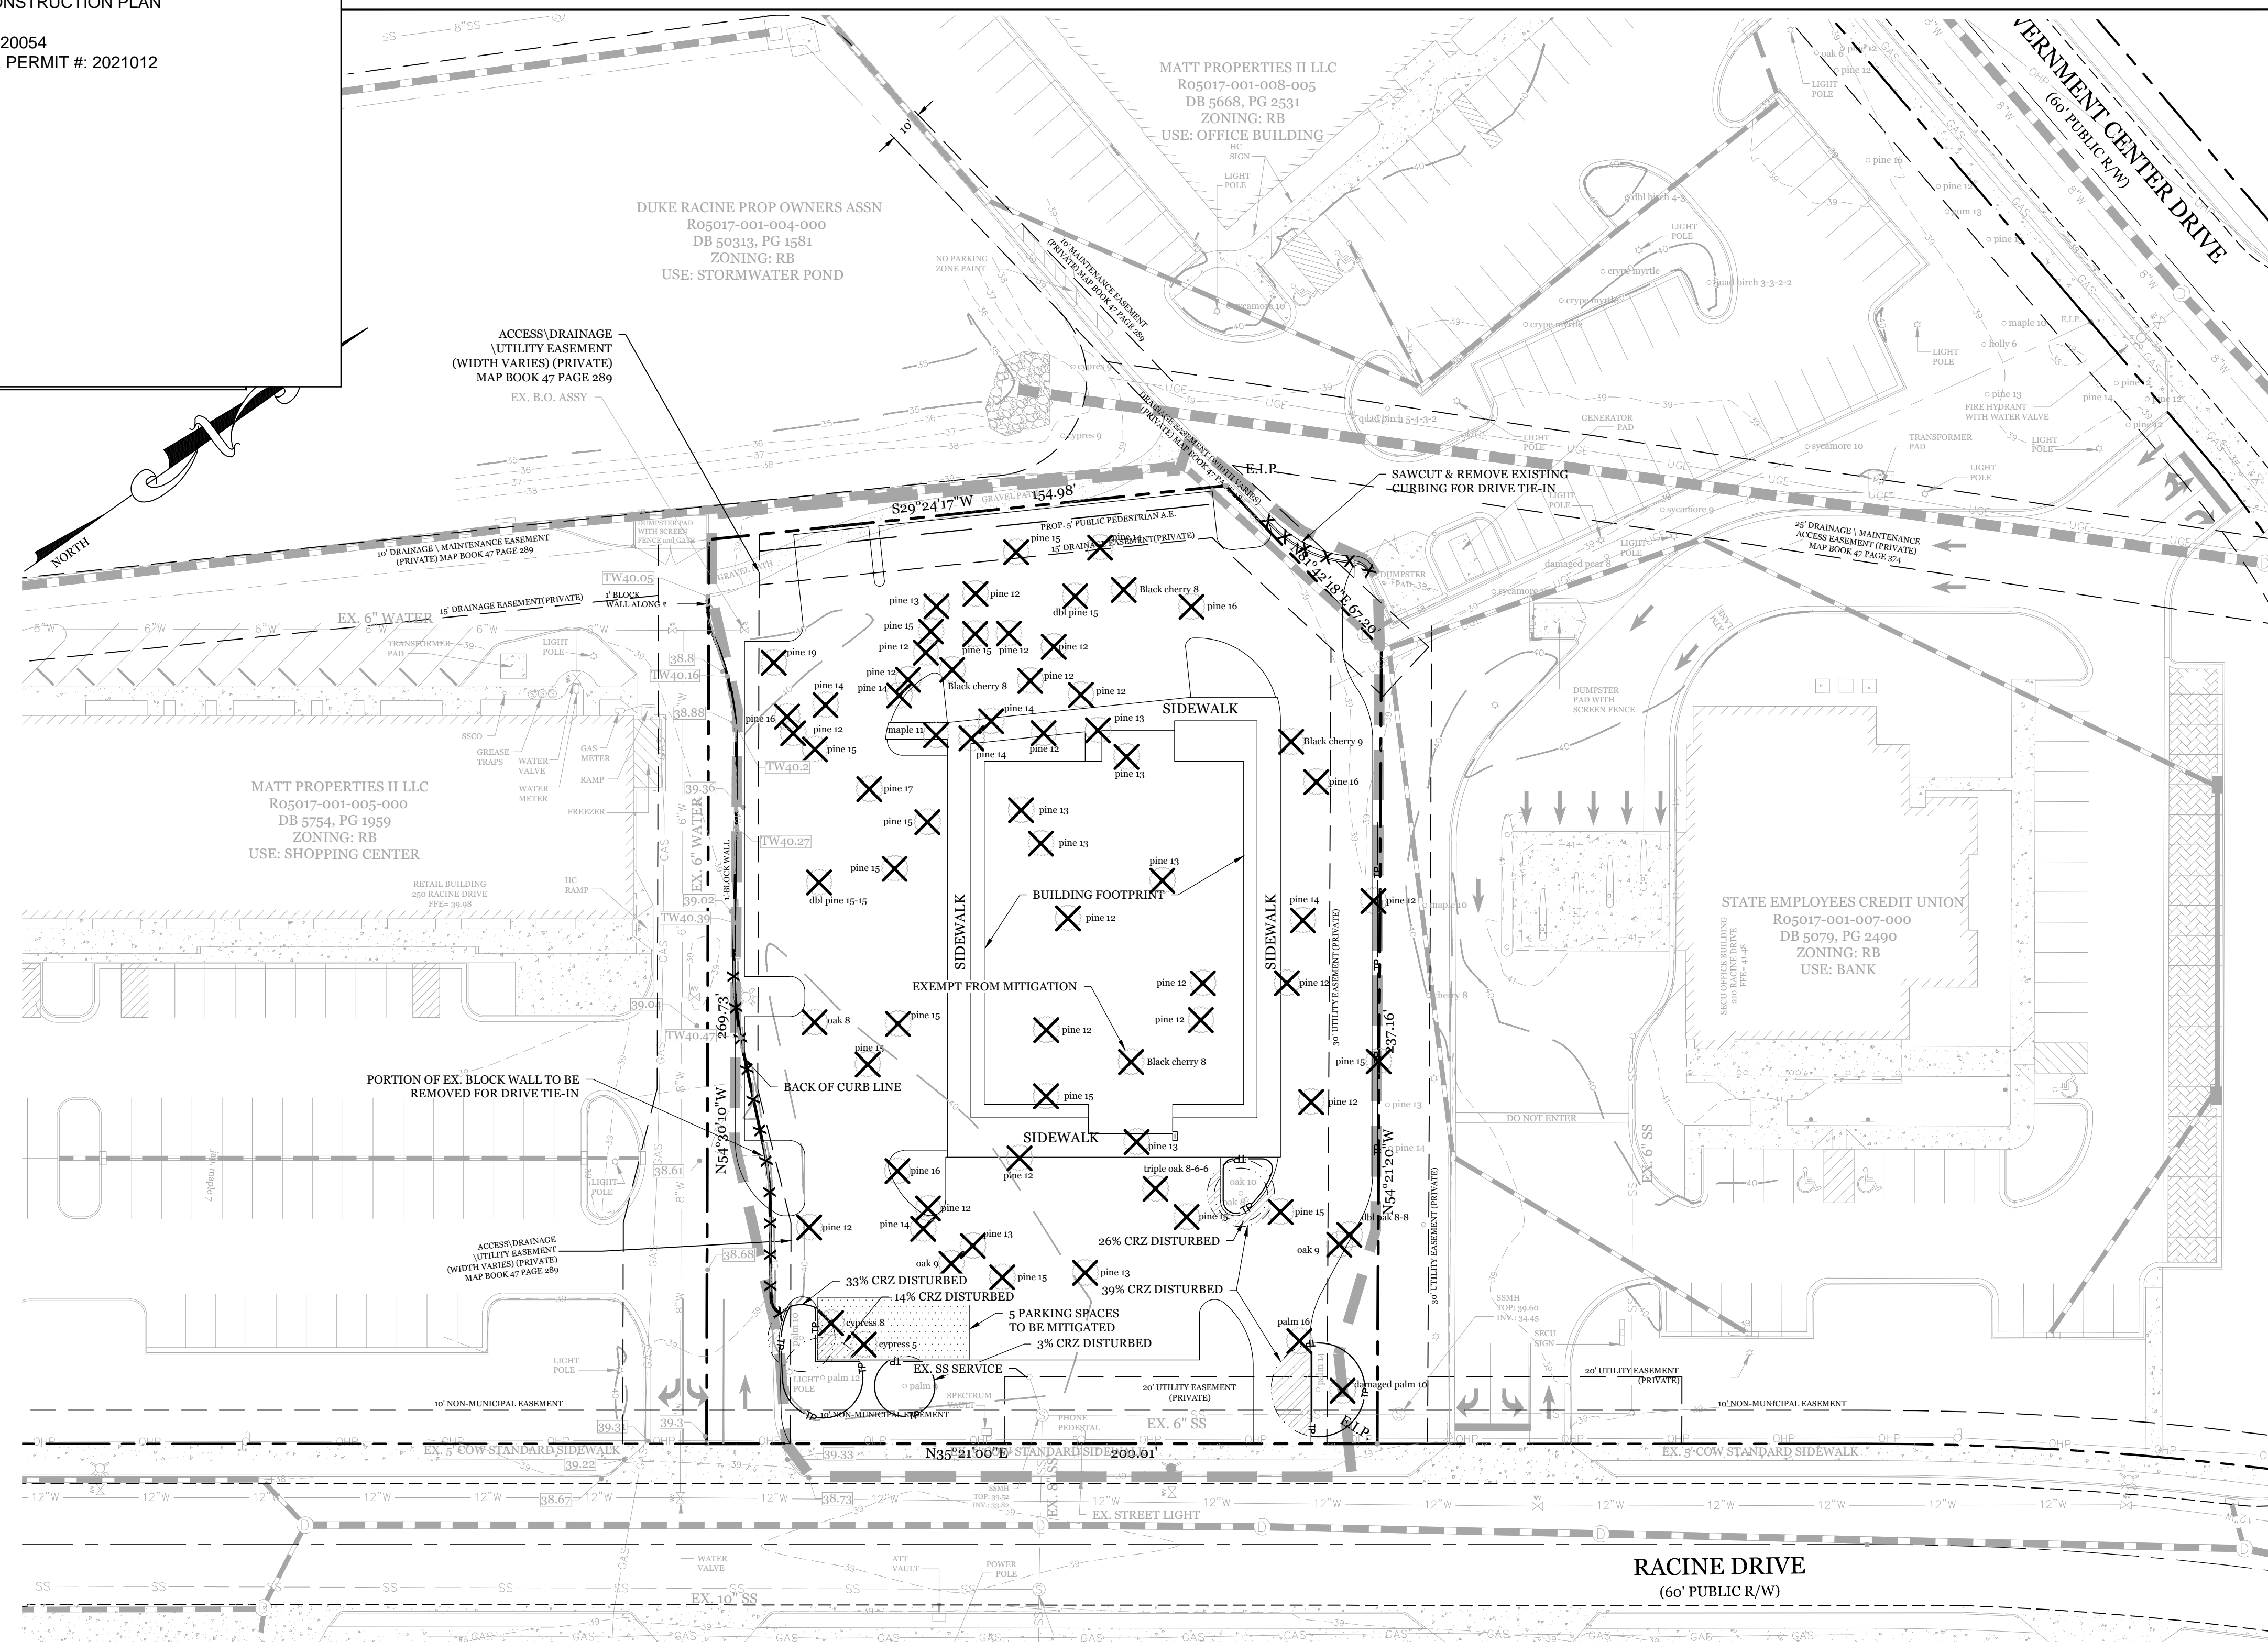


SITE DATA
 PARCEL ID: R05017-001-006-000
 ZONING: RB-REGIONAL BUSINESS
 CAMA LAND USE CLASSIFICATION: URBAN
 PROJECT ADDRESS: 240 RACINE DR. WILMINGTON, NC 28403
 CURRENT OWNERS: MATT PROPERTIES III LLC 3355 GRANVILLE DR RALEIGH, NC 27609
 TOTAL ACREAGE IN PROJECT BOUNDARY: 54.893 S.F. (1.26 AC.)
 EXISTING ONSITE IMPERVIOUS AREAS: ASPHALT: 3,060 S.F.
 EXISTING ONSITE IMPERVIOUS AREAS TO BE REMOVED: ASPHALT: 425 S.F.
 SOIL TYPE: Se (Seagate Fine Sand) 70.2%
 Ls (Leon sand) 29.8%
 (Per the USDA websoil survey map)

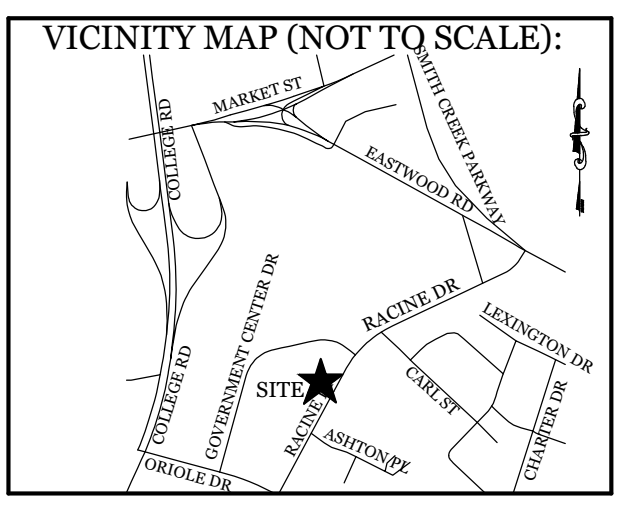


REVISIONS


NO.	DESCRIPTION

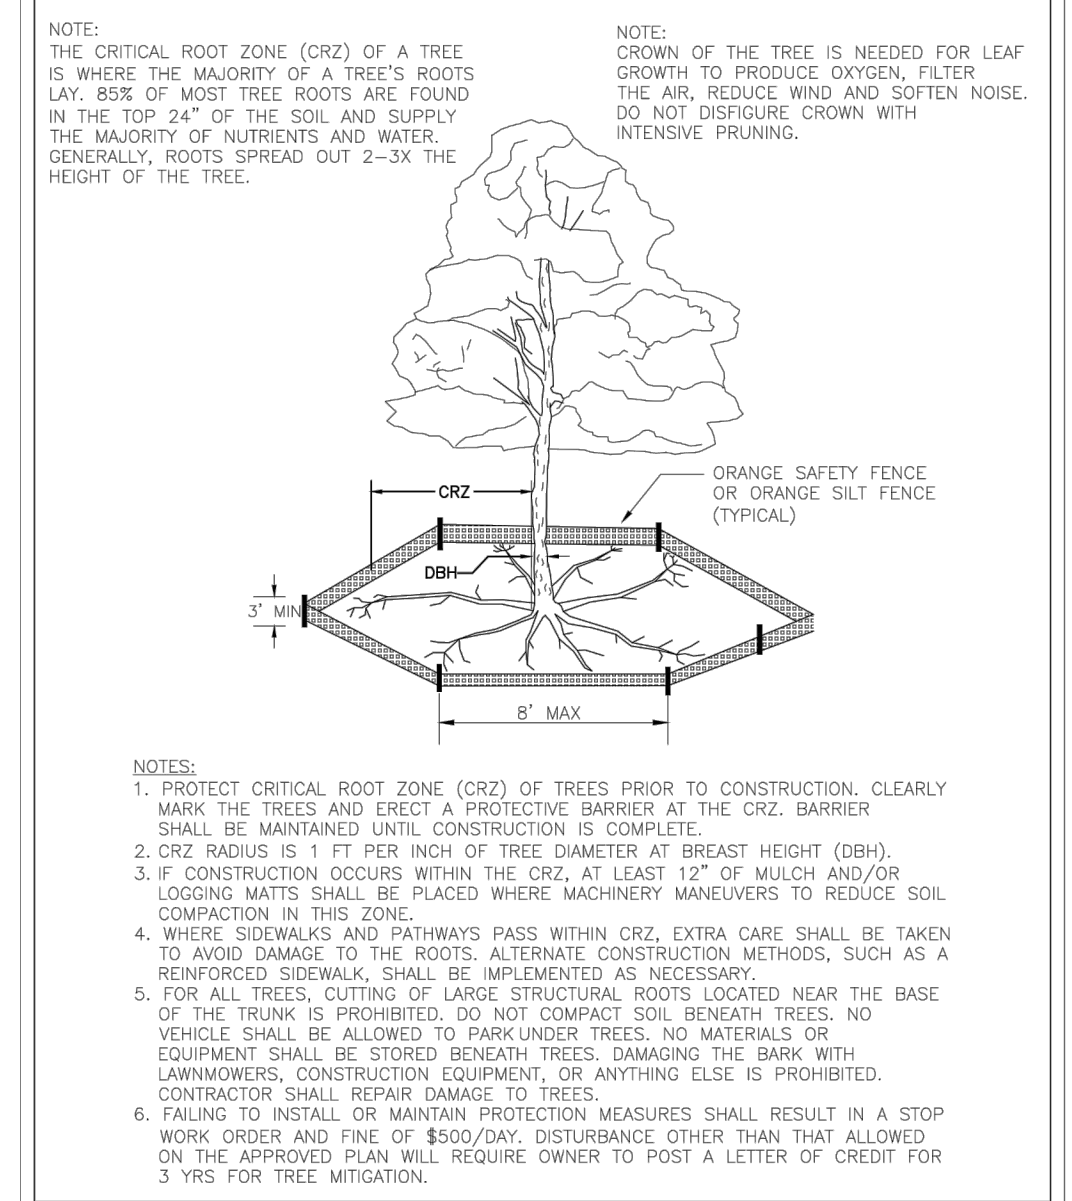

STANDARD DETAIL
TREE PROTECTION DURING CONSTRUCTION
 SHEET 1 of 2
 DATE: JAN. 2015
 DRAWN BY: JSR
 CHECKED BY: RDG, P.E.
 SCALE: NOT TO SCALE
 CITY OF WILMINGTON
 CITY OF WILMINGTON ENGINEERING
 PO BOX 1810
 WILMINGTON, NC 28402
 (910) 341-7807
 SD 15-09

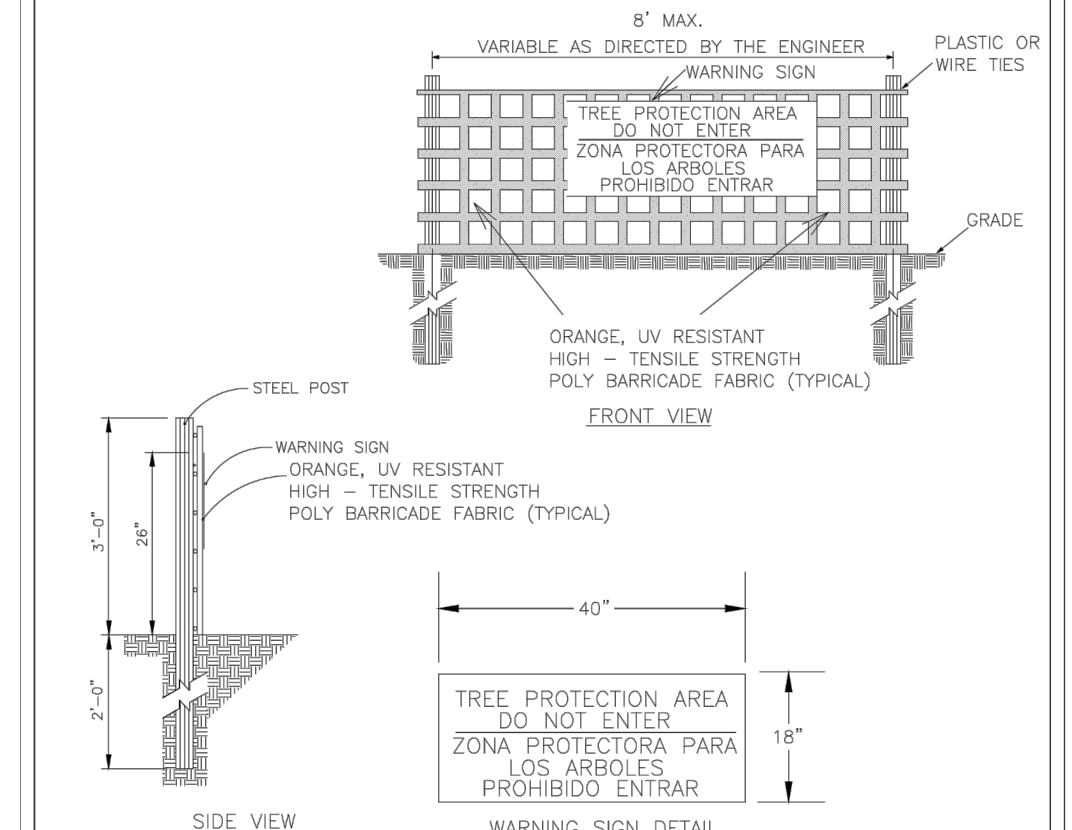

STANDARD DETAIL
TREE PROTECTION DURING CONSTRUCTION
 SHEET 2 of 2
 DATE: JAN. 2015
 DRAWN BY: JSR
 CHECKED BY: RDG, P.E.
 SCALE: NOT TO SCALE
 CITY OF WILMINGTON
 CITY OF WILMINGTON ENGINEERING
 PO BOX 1810
 WILMINGTON, NC 28402
 (910) 341-7807
 SD 15-09

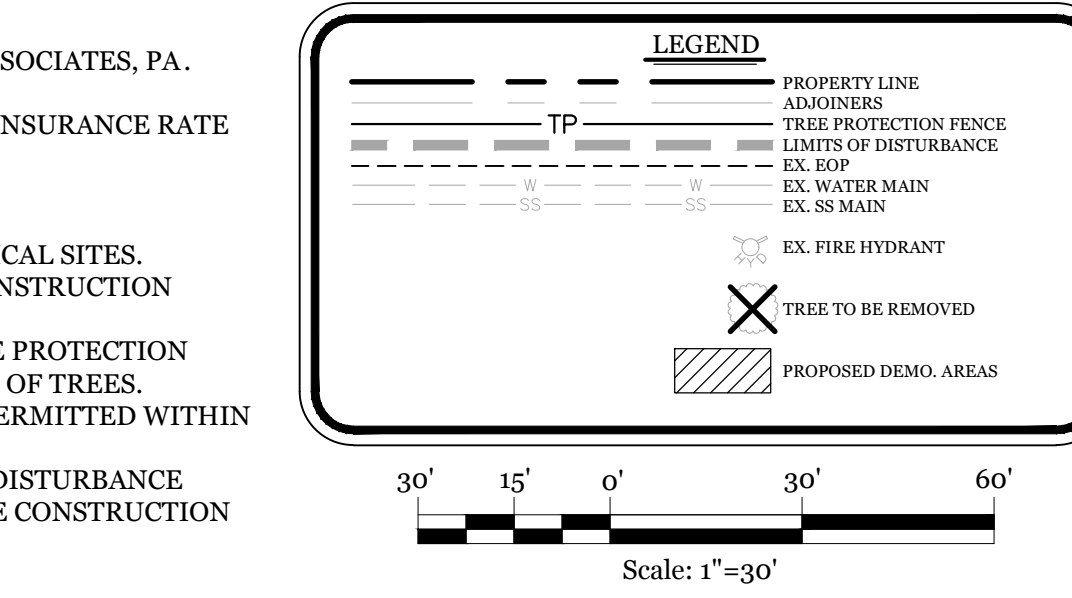

PROPOSED TREES TO BE REMOVED

SIZE	SPECIES	QTY	TYPE	REASON FOR REMOVAL
8"	BLACK CHERRY	3	SIGNIFICANT	ESS. IMPROVEMENTS
9"	BLACK CHERRY	1	SIGNIFICANT	ESS. IMPROVEMENTS
5"	CYPRESS	1	NON-REGULATED	ESS. IMPROVEMENTS
8"	CYPRESS	1	NON-REGULATED	ESS. IMPROVEMENTS
11"	MAPLE	1	REGULATED	ESS. IMPROVEMENTS
6"	OAK	2	NON-REGULATED	ESS. IMPROVEMENTS
8"	OAK	4	REGULATED	ESS. IMPROVEMENTS
9"	OAK	2	REGULATED	ESS. IMPROVEMENTS
10"	PALM	1	REGULATED	DAMAGED
16"	PALM	1	REGULATED	ESS. IMPROVEMENTS
12"	PINE	19	REGULATED	ESS. IMPROVEMENTS
13"	PINE	9	REGULATED	ESS. IMPROVEMENTS
14"	PINE	7	REGULATED	ESS. IMPROVEMENTS
15"	PINE	17	REGULATED	ESS. IMPROVEMENTS
16"	PINE	4	REGULATED	ESS. IMPROVEMENTS
17"	PINE	1	REGULATED	ESS. IMPROVEMENTS
19"	PINE	1	REGULATED	ESS. IMPROVEMENTS
TOTAL		75		

REQUIRED TREE MITIGATION CHART

QTY	SIZE	TYPE	% MITIGATION	REPLACEMENT TREE QTY
1	8"	CYPRESS	100%	5-33
1	5"	CYPRESS	100%	3-33
1	9"	CHERRY	50%	3.00
2	8"	CHERRY	50%	5-33
TOTAL REPLACEMENT TREES				17

* OWNER TO PROVIDE A PAYMENT IN LIEU FOR REQUIRED MITIGATION.

CREDITS FOR PRESERVED TREES

QTY	DBH	TYPE	TOTAL DBH
1	8"	OAK	8
1	10"	OAK	10
1	9"	PALM	9
1	10"	PALM	10
1	12"	PALM	12
1	14"	PALM	14
TOTAL CREDITS FOR PRESERVED TREES			11

NOTES:
 1. EXISTING SURVEY DATA PROVIDED BY MICHAEL UNDERWOOD AND ASSOCIATES, PA.
 2. NO WETLANDS EXIST ON SITE.
 3. PROPERTY IS LOCATED IN ZONE "X" ACCORDING TO THE FEMA FLOOD INSURANCE RATE MAP 3720314800K, DATED 08/28/18
 4. THIS PROPERTY IS NOT AFFECTED BY AN AEC.
 5. NO CONSERVATION RESOURCES EXIST ON SITE.
 6. THIS PROPERTY IS NOT AFFECTED BY ANY HISTORIC OR ARCHAEOLOGICAL SITES.
 7. PRIOR TO ANY CLEARING, GRADING OR CONSTRUCTION ACTIVITY, A CONSTRUCTION ENTRANCE AND SILT FENCING SHALL BE INSTALLED.
 8. PRIOR TO ANY CLEARING, GRADING OR CONSTRUCTION ACTIVITY, TREE PROTECTION FENCING WILL BE INSTALLED AROUND PROTECTED TREES OR GROVES OF TREES.
 9. NO CONSTRUCTION WORKERS, TOOLS, MATERIALS OR VEHICLES ARE PERMITTED WITHIN THE TREE PROTECTION FENCING.
 10. TREE PROTECTION SIGNAGE SHALL BE ADDED ALONG THE LIMITS OF DISTURBANCE ADJACENT TO TREES EVERY 100' TO PROTECT TREES ADJACENT TO THE CONSTRUCTION SITE.

INTRACOASTAL ENGINEERING, PLLC
 5725 Oleander Dr. Unit E-7
 Wilmington, North Carolina 28403
 Phone: 910.859.8983
 Email: charlie@intracoastalengineering.com
 License Number P-0662

EXISTING CONDITIONS, TREE REMOVAL & PROTECTION PLAN
 FOR
240 RACINE DR. OFFICE BUILDING
 WILMINGTON, NORTH CAROLINA


CLIENT INFORMATION:
 AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

DRAWN: JAE **SHEET SIZE:** 24 X 36
CHECKED: CDC **DATE:** 2/26/2021
APPROVED: CDC **SCALE:** 1" = 30'
PROJECT NUMBER: 2020-029

DRAWING NUMBER: C-0


1 OF 6

APPROVED CONSTRUCTION PLAN
 DATED: 3/11/21
 PROJECT #: 2020054
 STORMWATER PERMIT #: 2021012

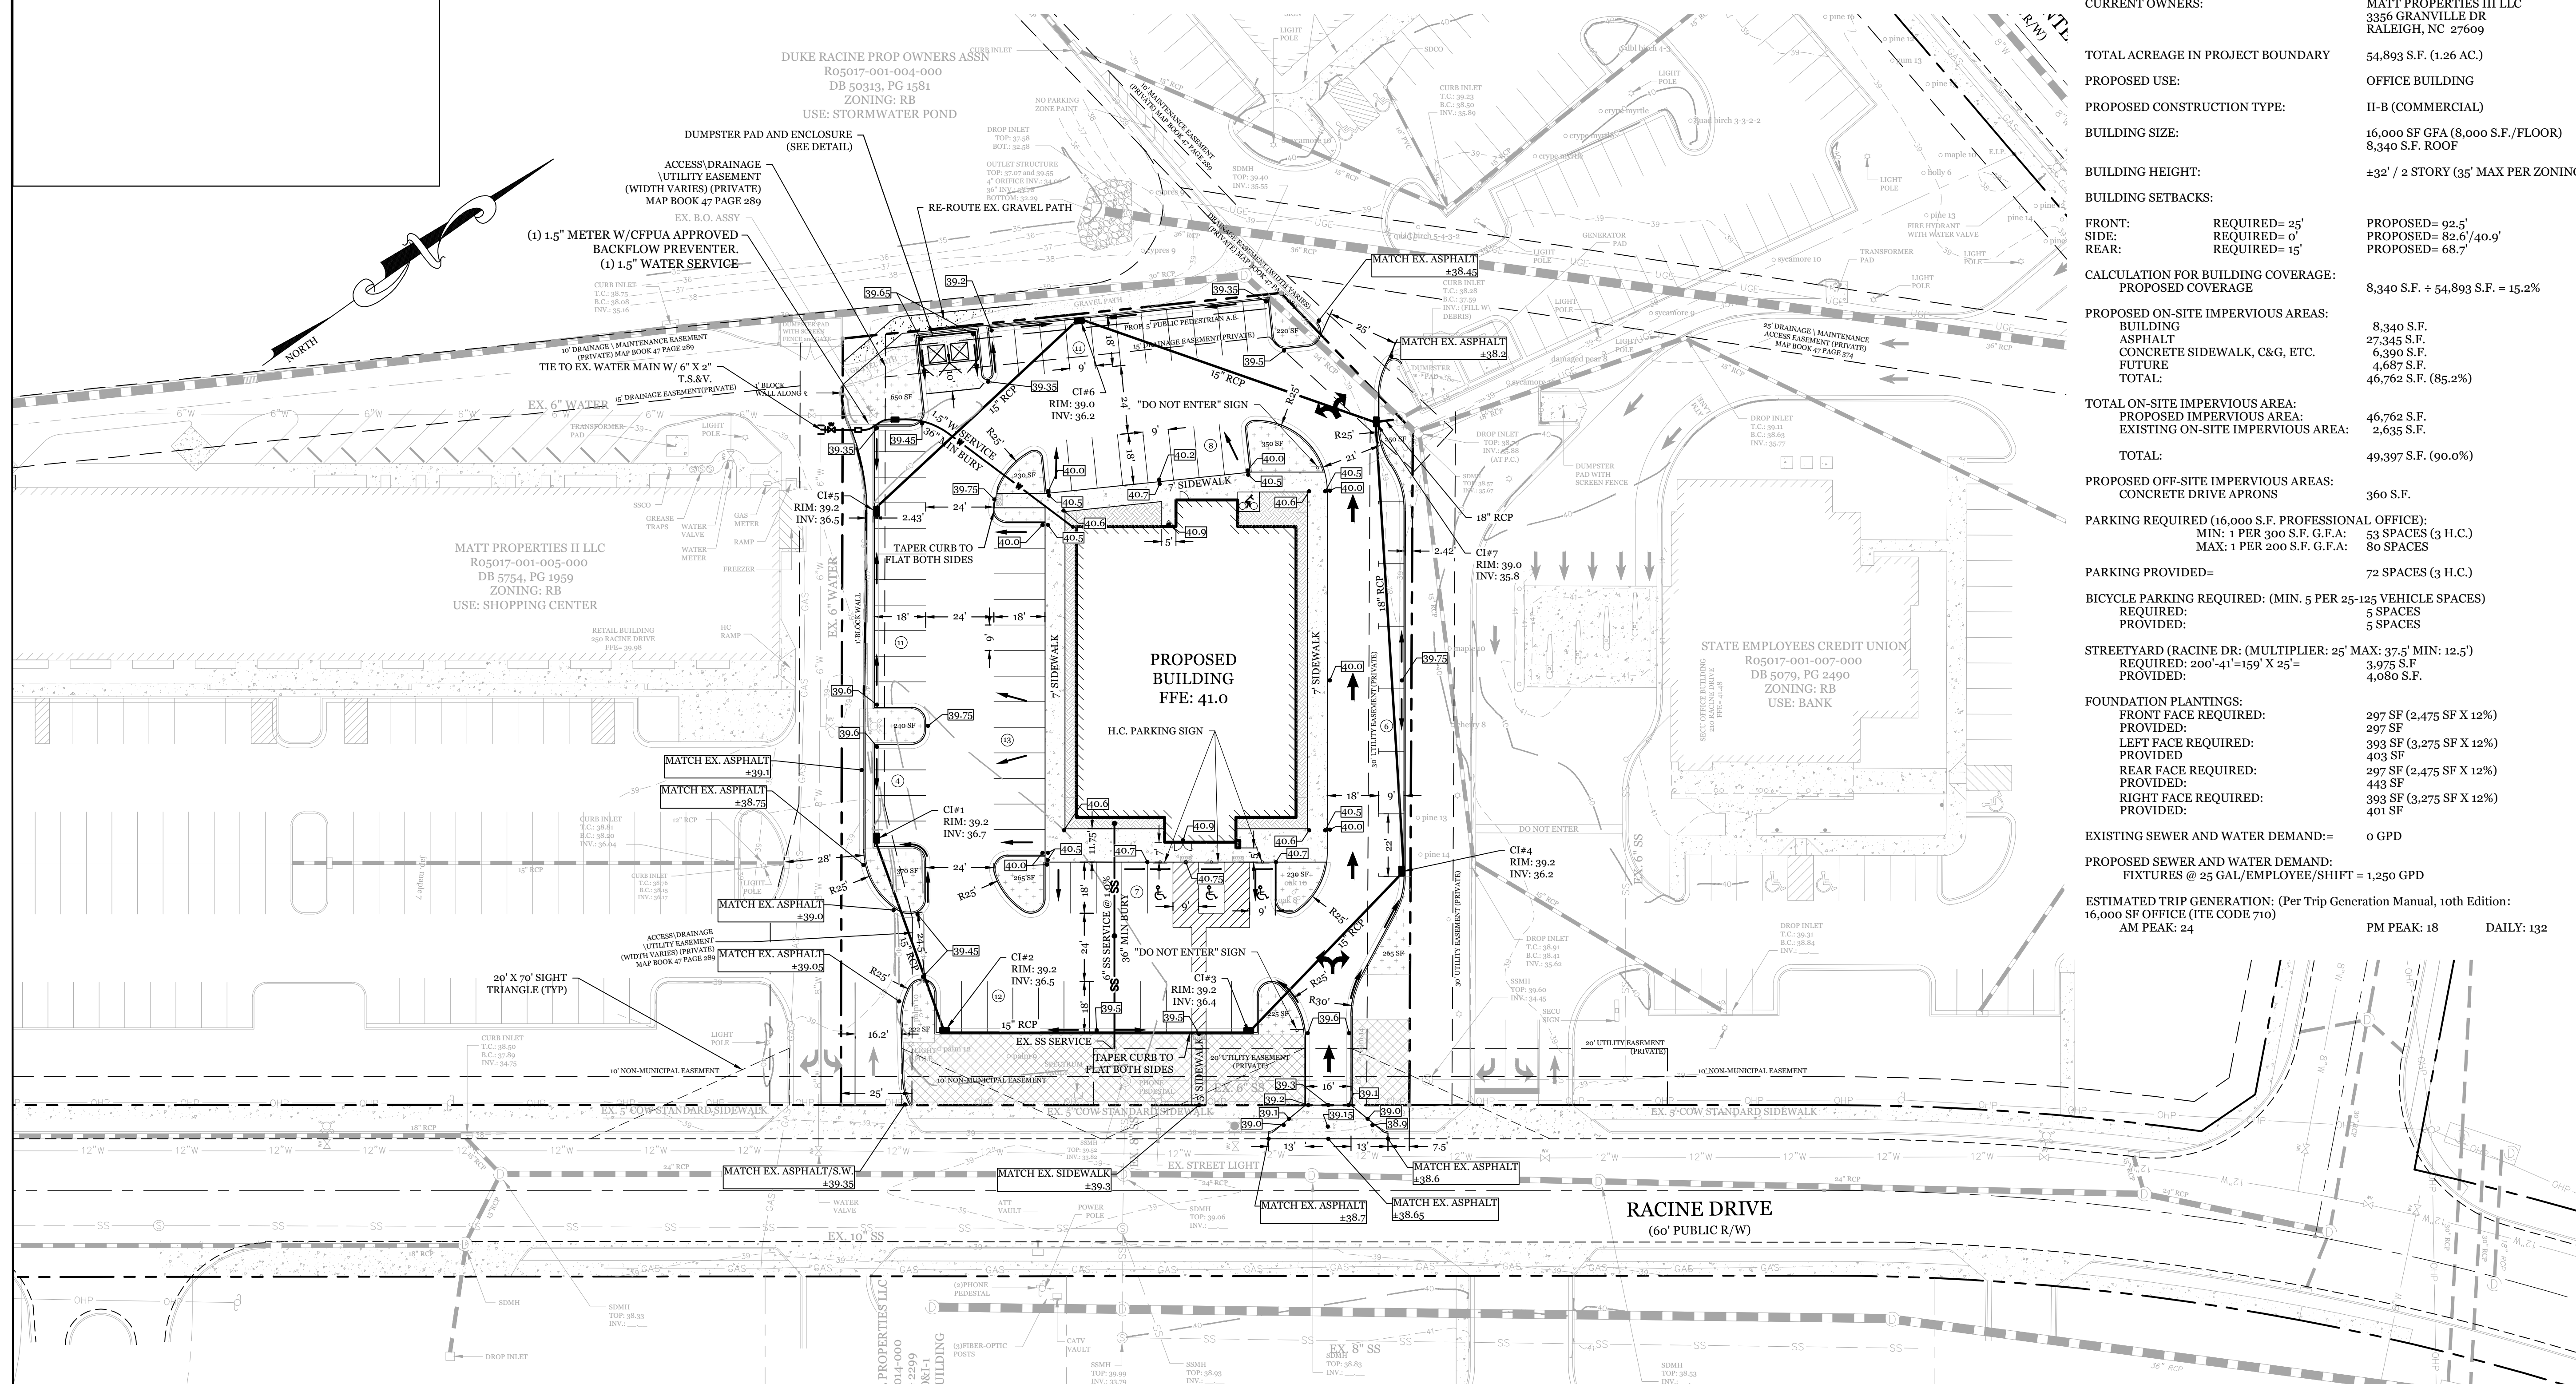

SITE DATA

PARCEL ID:	R05017-001-004-000
ZONING:	RB-REGIONAL BUSINESS
CAMA LAND USE CLASSIFICATION:	URBAN
PROJECT ADDRESS:	240 RACINE DR. WILMINGTON, NC 28403
CURRENT OWNERS:	MATT PROPERTIES III LLC 3356 GRANVILLE DR RALEIGH, NC 27609
TOTAL ACREAGE IN PROJECT BOUNDARY:	54,893 S.F. (1.26 AC.)
PROPOSED USE:	OFFICE BUILDING
PROPOSED CONSTRUCTION TYPE:	II-B (COMMERCIAL)
BUILDING SIZE:	16,000 SF GFA (8,000 S.F./FLOOR) 8,340 S.F. ROOF
BUILDING HEIGHT:	+32' / 2 STORY (35' MAX PER ZONING)
BUILDING SETBACKS:	
FRONT:	REQUIRED= 25'
SIDE:	REQUIRED= 0'
REAR:	REQUIRED= 15'
PROPOSED=	92.5'
PROPOSED=	82.6'/40.9'
PROPOSED=	68.7'
CALCULATION FOR BUILDING COVERAGE:	
PROPOSED COVERAGE:	8,340 S.F. ÷ 54,893 S.F. = 15.2%
PROPOSED ON-SITE IMPERVIOUS AREAS:	
BUILDING:	8,340 S.F.
ASPHALT CONCRETE SIDEWALK, C&G, ETC.:	27,345 S.F.
FUTURE:	6,390 S.F.
TOTAL:	46,762 S.F. (85.2%)
TOTAL ON-SITE IMPERVIOUS AREA:	46,762 S.F.
EXISTING ON-SITE IMPERVIOUS AREA:	2,635 S.F.
TOTAL:	49,397 S.F. (90.0%)
PROPOSED OFF-SITE IMPERVIOUS AREAS:	
CONCRETE DRIVE APRONS:	360 S.F.
PARKING REQUIRED (16,000 S.F. PROFESSIONAL OFFICE):	
MIN: 1 PER 300 S.F. G.F.A.:	53 SPACES (3 H.C.)
MAX: 1 PER 200 S.F. G.F.A.:	80 SPACES
PARKING PROVIDED=	72 SPACES (3 H.C.)
BICYCLE PARKING REQUIRED: (MIN. 5 PER 25-125 VEHICLE SPACES)	
REQUIRED:	5 SPACES
PROVIDED:	5 SPACES
STREET YARD (RACINE DR. (MULTIPLIER: 25' MAX; 37.5' MIN; 12.5')	
REQUIRED: 200'-41'=159' X 25'=	3,975 S.F.
PROVIDED:	4,080 S.F.
FOUNDATION PLANTINGS:	
FRONT FACE REQUIRED:	297 SF (2,475 SF X 12%)
PROVIDED:	297 SF
LEFT FACE REQUIRED:	393 SF (3,275 SF X 12%)
PROVIDED:	403 SF
REAR FACE REQUIRED:	297 SF (2,475 SF X 12%)
PROVIDED:	443 SF
RIGHT FACE REQUIRED:	393 SF (3,275 SF X 12%)
PROVIDED:	401 SF
EXISTING SEWER AND WATER DEMAND=	0 GPD
PROPOSED SEWER AND WATER DEMAND:	
FIXTURES @ 25 GAL/EMPLOYEE/SHIFT =	1,250 GPD
ESTIMATED TRIP GENERATION: (Per Trip Generation Manual, 10th Edition:	
16,000 SF OFFICE (ITE CODE 710)	
AM PEAK: 24	PM PEAK: 18
	DAILY: 132

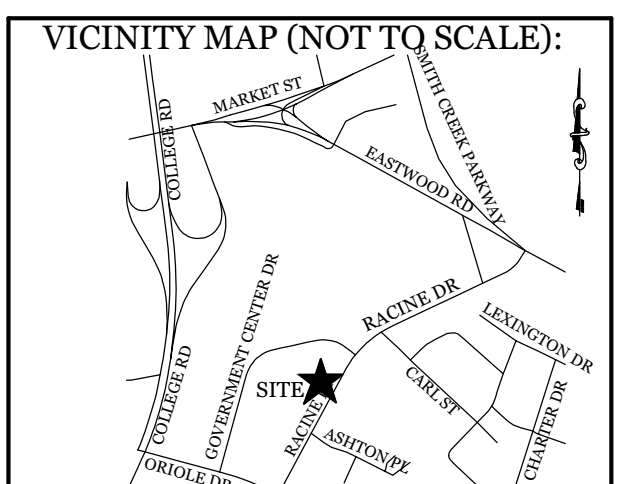

REVISIONS

NO.	DESCRIPTION

INTRACOASTAL ENGINEERING, PLLC

5725 Oleander Dr. Unit E-7
 Wilmington, North Carolina 28403
 Phone: 910.859.8983
 Email: charlie@intracoastalengineering.com
 License Number P-0662

FOR



240 RACINE DR.

OFFICE BUILDING

WILMINGTON, NORTH CAROLINA

- DEVELOPMENT NOTES:**
- ALL DEVELOPMENT SHALL BE IN ACCORDANCE WITH CITY OF WILMINGTON ZONING ORDINANCE.
 - PROJECT SHALL COMPLY WITH ALL FEDERAL, STATE & CITY OF WILMINGTON REGULATIONS.
 - RUNOFF FROM ALL IMPERVIOUS SURFACES, INCLUDING ROOF DRAINAGE, TO BE DIRECTED TO STORM DRAIN SYSTEM.
- FIRE & SAFETY NOTES:**
- PROPOSED BUILDING WILL NOT BE SPRINKLED
 - PARKING AND LANDSCAPING CANNOT BLOCK FIRE HYDRANTS.
 - ALL WEATHER ACCESS ROAD MUST BE MAINTAINED AROUND CONSTRUCTION SITE AT ALL TIMES.
 - HYDRANTS SHALL BE OF SUFFICIENT NUMBERS TO ACCOMMODATE BASE FIRE FLOW REQUIREMENTS OF STRUCTURE.
 - IN ADDITION TO THE STANDARD COMMENTS, ADDITIONAL FIRE PROTECTION AND ACCESSIBILITY REQUIREMENTS MAY BE REQUIRED DUE TO ANY SPECIAL CIRCUMSTANCES CONCERNING THE PROJECT.
 - CONTRACTOR SHALL SUBMIT A RADIO SIGNAL STRENGTH STUDY FOR ALL COMMERCIAL BUILDINGS ON THE SITE THAT DEMONSTRATES THAT EXISTING EMERGENCY RESPONDER RADIO SIGNAL LEVELS MEET THE REQUIREMENTS OF SECTION 510 OF THE 2018 NC FIRE CODE.
- GENERAL TRAFFIC NOTES:**
- ALL TRAFFIC CONTROL SIGNS AND PAVEMENT MARKINGS OFF THE R/W TO BE MAINTAINED BY THE PROPERTY OWNER IN ACCORDANCE WITH MUTCD STANDARDS.
 - ALL PAVEMENT MARKINGS IN PUBLIC RIGHTS-OF-WAY AND FOR DRIVEWAYS ARE TO BE THERMOPLASTIC AND MEET CITY AND/OR NCDOT STANDARDS. [DETAIL SD 15-13 & SD 11-3 COFW TECH STDS]
 - ALL SIGNS AND PAVEMENT MARKINGS OFF RIGHT OF WAY ARE TO MEET/BE MAINTAINED TO MUTCD (MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES) STANDARDS. [DETAIL SD 15-13 & SD 11-3 COFW TECH STDS]
 - A UTILITY CUT PERMIT IS REQUIRED FOR EACH OPEN CUT OF A CITY STREET. NOTE THIS ON THE PLAN AND CONTACT 341-5899 FOR MORE DETAILS. IN CERTAIN CASES AN ENTIRE RESURFACING OF THE AREA BEING OPEN CUT MAY BE REQUIRED.
 - ANY BROKEN OR MISSING SIDEWALK PANELS, DRIVEWAY PANELS AND CURBING WILL BE REPLACED.
 - CONTACT 811 PRIOR TO CONTACTING CITY OF WILMINGTON, TRAFFIC ENGINEERING REGARDING THE UTILITIES IN ROW.
 - ALL PROPOSED VEGETATION WITHIN SIGHT TRIANGLES SHALL NOT INTERFERE WITH CLEAR VISUAL SIGHT LINES FROM 30" TO 10'.
 - STREET TREES MUST BE LOCATED A MINIMUM OF 15 FEET FROM STREET LIGHTS. [COFW SD 15-17]
 - A UTILITY CUT PERMIT IS REQUIRED FOR EACH OPEN CUT OF A CITY STREET. NOTE THIS ON THE PLAN AND CONTACT 341-5899 FOR MORE DETAILS. IN CERTAIN CASES AN ENTIRE RESURFACING OF THE AREA BEING OPEN CUT MAY BE REQUIRED.

- UTILITY NOTES:**
- EXISTING WATER AND SANITARY SEWER SERVICES ARE CURRENTLY AVAILABLE TO THE SITE FROM CAPE FEAR PUBLIC UTILITY AUTHORITY PUBLIC MAINS.
 - ALL PROPOSED UTILITY SERVICES, SUCH AS ELECTRIC POWER, CATV, GAS & TELEPHONE SHALL BE INSTALLED UNDERGROUND.
 - ALL WATER & SEWER UTILITIES TO BE INSTALLED PER CFPWA TECHNICAL SPECIFICATIONS & STANDARDS.
 - ANY BACKFLOW PREVENTION DEVICES REQUIRED BY THE CFPWA WILL NEED TO BE ON THE LIST OF APPROVED DEVICES BY USFCOCCR OR ASSE.
 - IF CONTRACTOR DESIRES CFPWA WATER FOR CONSTRUCTION, HE SHALL APPLY IN ADVANCE FOR THIS SERVICE AND MUST PROVIDE A REDUCED PRESSURE ZONE (RPZ) BACKFLOW PREVENTION DEVICE ON THE DEVELOPER'S SIDE OF THE WATER METER BOX.
 - WHEN PVC WATER MAINS AND SERVICES ARE PROPOSED, THE PIPES ARE TO BE MARKED WITH NO. 10 INSULATED, SINGLE-STRAND COPPER WIRE INSTALLED & STRAPPED TO THE PIPES WITH DUCT TAPE. THIS IS TO BE ACCESSIBLE IN ALL VALVES AND METER BOXES TO AID IN FUTURE LOCATION OF FACILITIES.
 - THE CONTRACTOR IS RESPONSIBLE FOR THE LOCATION AND PROTECTION OF EXISTING UTILITIES DURING CONSTRUCTION. CALL NCS11 AT 811 OR 1-800-632-4949. CONTRACTOR IS RESPONSIBLE FOR THE REPAIR AND REPLACEMENT OF ANY UTILITIES, CURB & GUTTER, PAVEMENT, ETC. THAT MAY BE DAMAGED DURING CONSTRUCTION. DAMAGED ITEMS SHALL BE REPAIRED TO AT LEAST THE QUALITY OR WORKMANSHIP FOUND IN THE ORIGINAL ITEM.
 - THE PROCESS FOR TELEPHONE CABLE PLACEMENT: * FINAL GRADE WILL NEED TO BE ESTABLISHED. * POWER WILL PLACE THEIR CABLE FIRST - APPROXIMATELY 3' DEEP. * TELEPHONE & CABLE TV WILL THEN PLACE THEIR CABLE AT APPROXIMATELY 4' DEEP.
 - SOLID WASTE DISPOSAL BY PRIVATE DUMPSITER SERVICE.

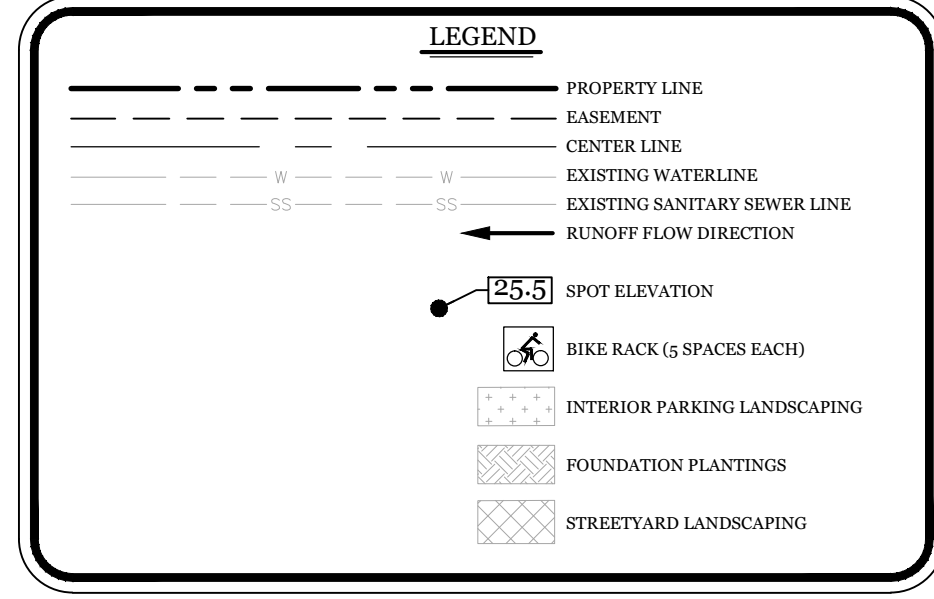

CLIENT INFORMATION:

AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	2/26/2021
APPROVED:	CDC	SCALE:	1" = 30'
PROJECT NUMBER:	2020-029		

DRAWING NUMBER: **C-1**

2 OF 6


APPROVED CONSTRUCTION PLAN
 DATED: 3/1/21
 PROJECT #: 2020054
 STORMWATER PERMIT #: 2021012

DUKE RACINE PROP OWNERS ASSN
 R05017-001-004-000
 DB 50313, PG 1581
 ZONING: RB
 USE: STORMWATER POND

SITE DATA

PARCEL ID: R05017-001-006-000
 ZONING: RB-REGIONAL BUSINESS
 CAMA LAND USE CLASSIFICATION: URBAN
 PROJECT ADDRESS: 240 RACINE DR. WILMINGTON, NC 28403
 CURRENT OWNERS: MATT PROPERTIES III LLC 3356 GRANVILLE DR RALEIGH, NC 27609
 TOTAL ACREAGE IN PROJECT BOUNDARY: 54.893 S.F. (1.26 AC.)
 TOTAL DISTURBED AREA: 1.25 AC.




VICINITY MAP (NOT TO SCALE):

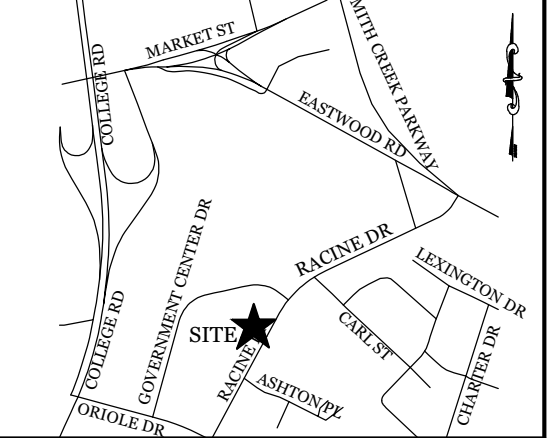

REVISIONS

NO.	DATE	DESCRIPTION

INTRACOASTAL ENGINEERING, PLLC
 5725 Oleander Dr, Unit E-7
 Wilmington, North Carolina 28403
 Phone: 910.859.8983
 Email: charlie@intracoastalengineering.com
 License Number P-0662

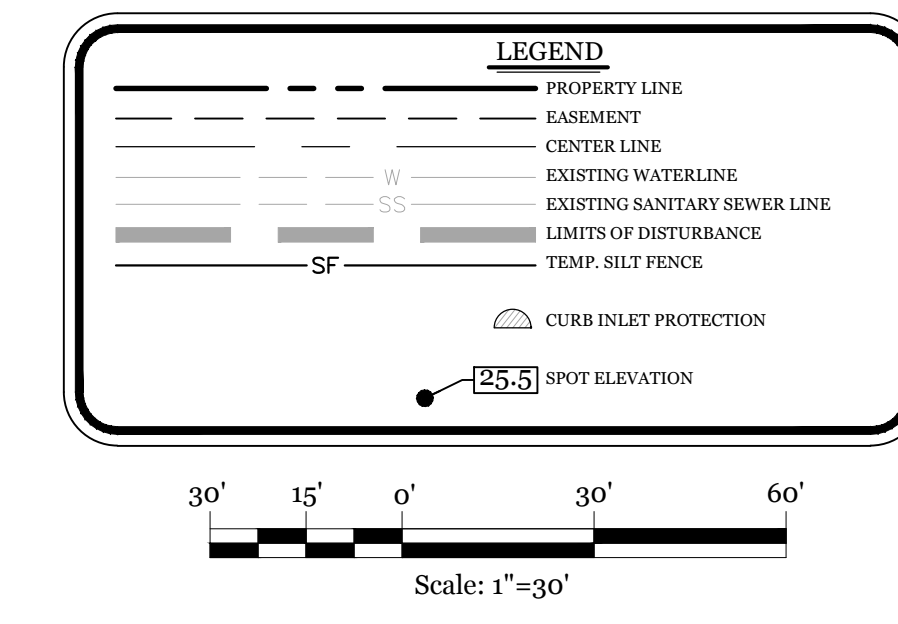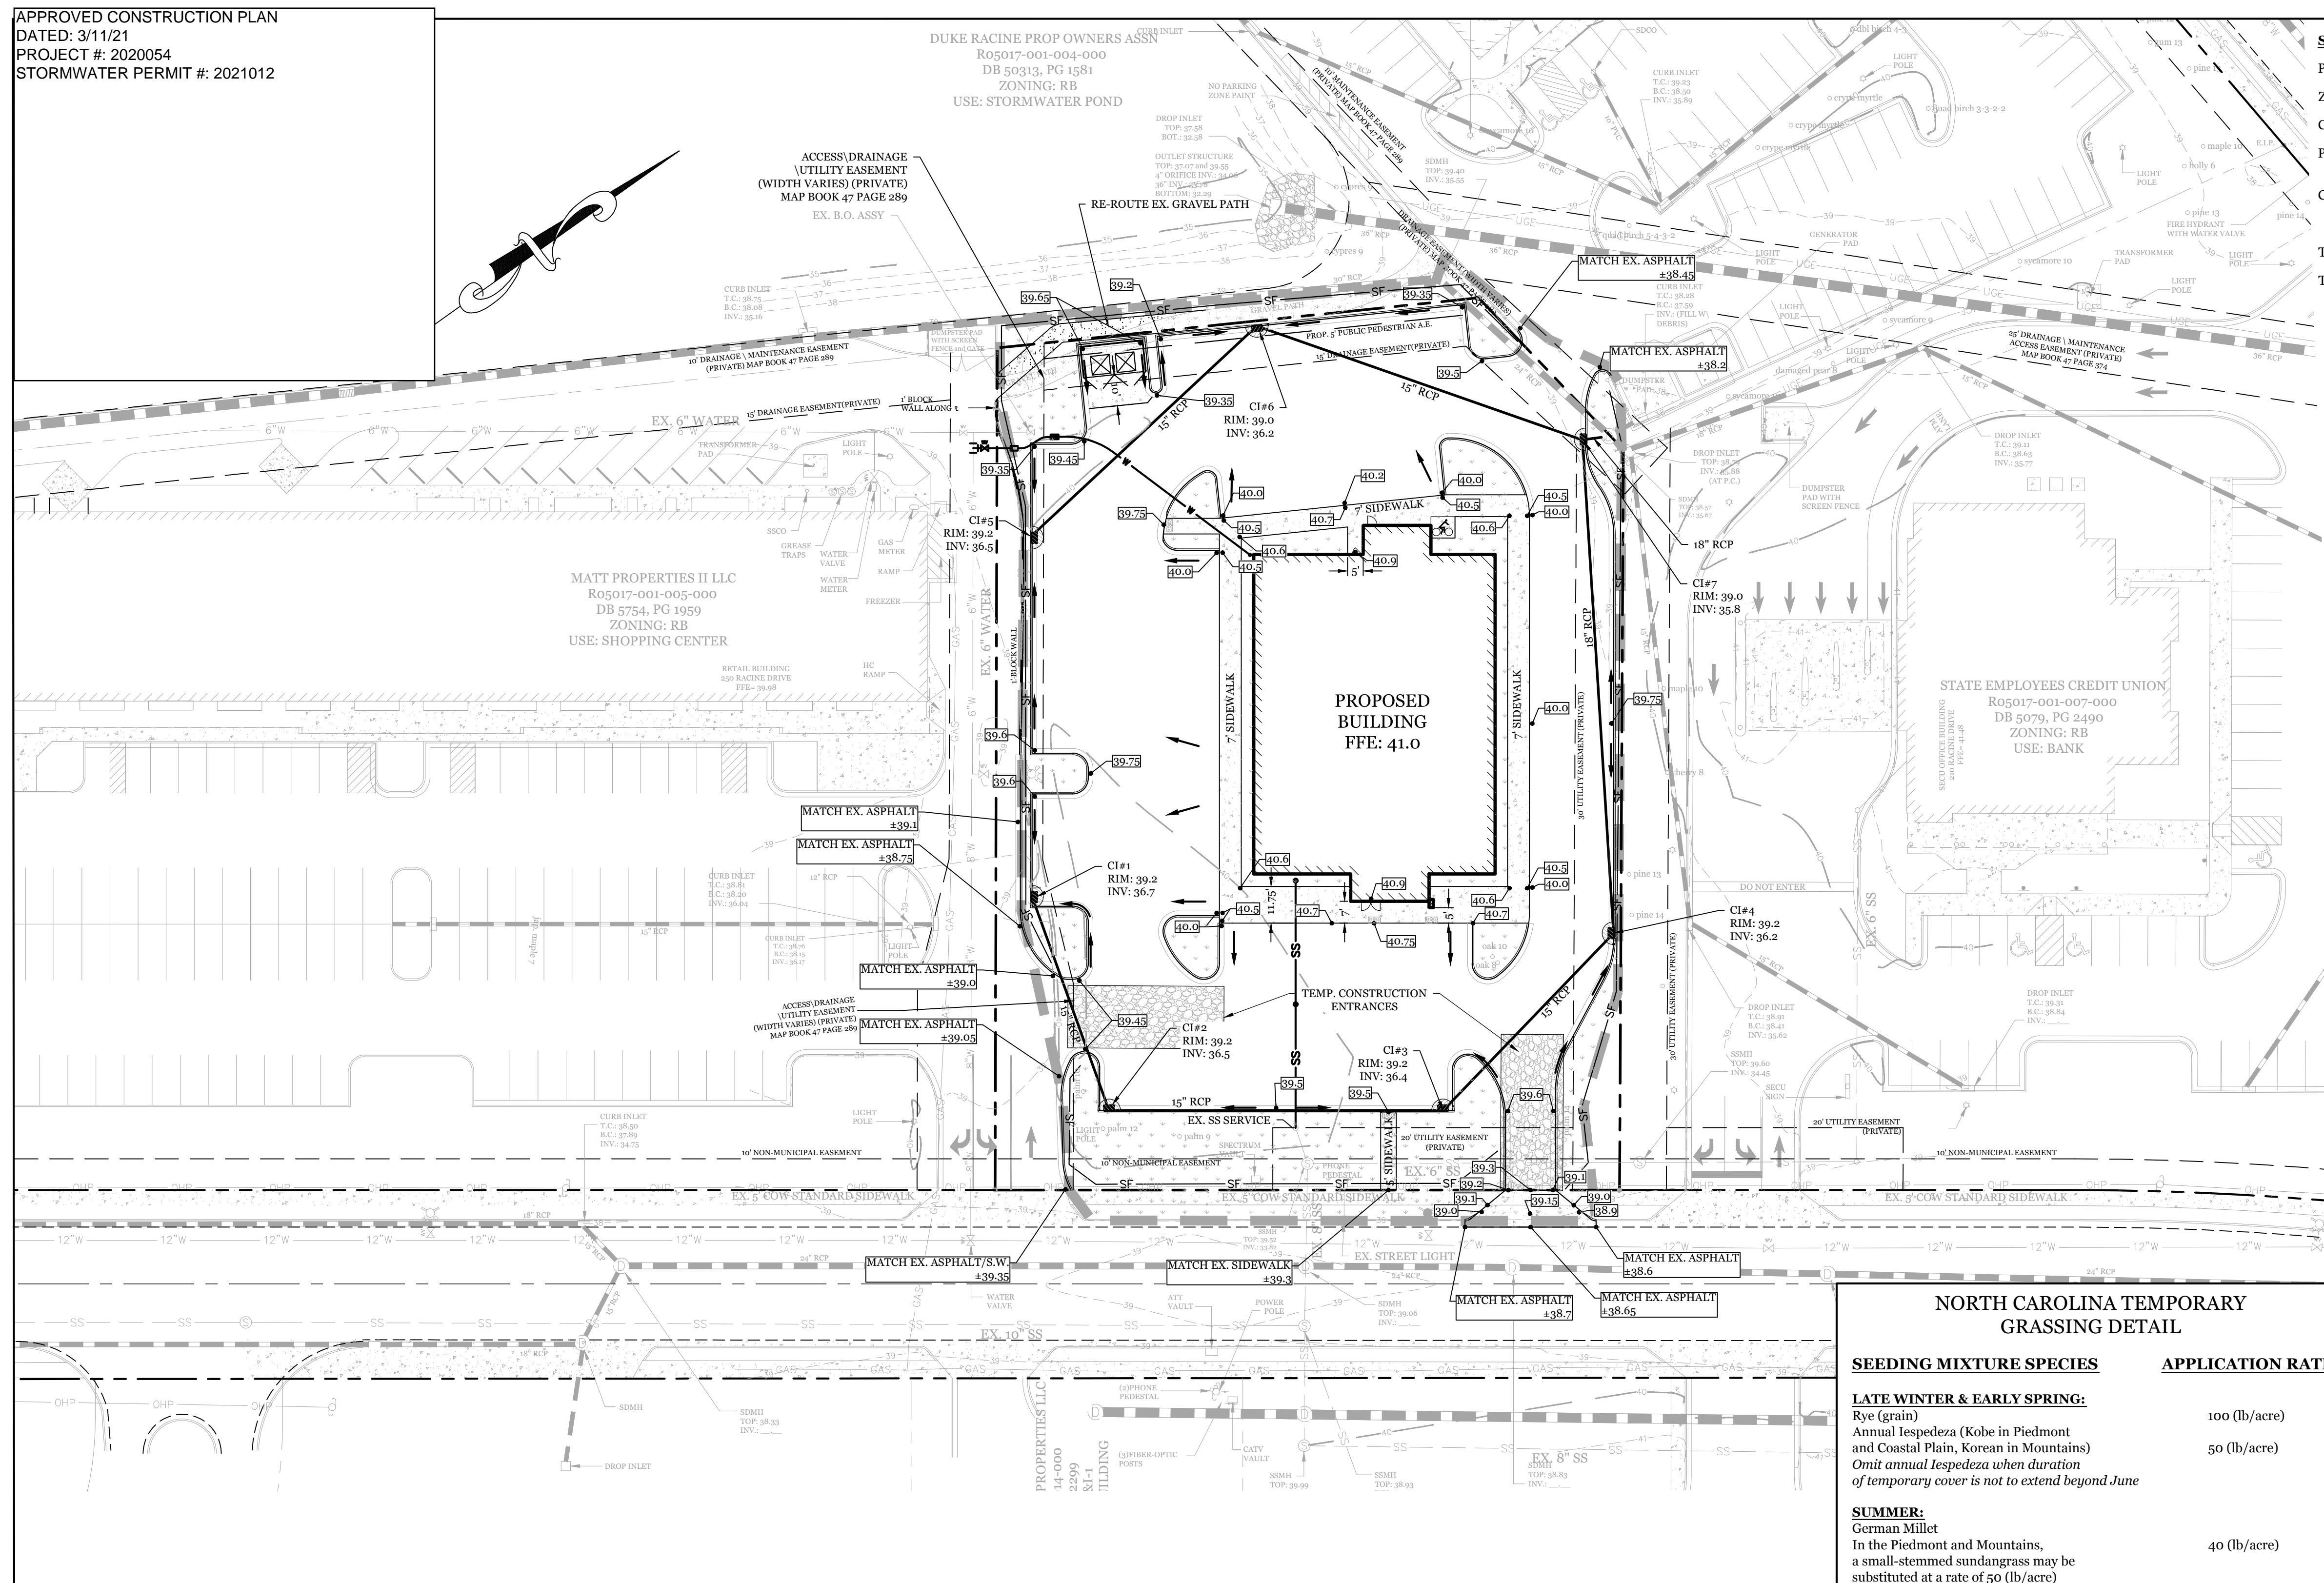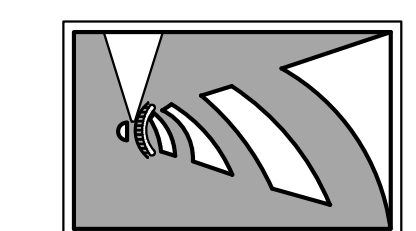

SEDIMENTATION & EROSION CONTROL PLAN
 FOR
240 RACINE DR. OFFICE BUILDING
 WILMINGTON, NORTH CAROLINA

NORTH CAROLINA TEMPORARY GRASSING DETAIL

SEEDING MIXTURE SPECIES	APPLICATION RATE
LATE WINTER & EARLY SPRING: Rye (grain)	100 (lb/acre)
Annual Lespedeza (Kobe in Piedmont and Coastal Plain, Korean in Mountains) <i>Omit annual Lespedeza when duration of temporary cover is not to extend beyond June</i>	50 (lb/acre)
SUMMER: German Millet In the Piedmont and Mountains, a small-stemmed sundangrass may be substituted at a rate of 50 (lb/acre)	40 (lb/acre)
FALL: Rye (grain)	120 (lb/acre)

NORTH CAROLINA PERMANENT GRASSING DETAIL

SEEDING MIXTURE SPECIES	APPLICATION RATE
FALL & WINTER: Tall Fescue (blend of two or three improved varieties) Rye (grain)	200 (lb/acre) 25 (lb/acre)
SPRING & SUMMER: Pensacola Bahiagrass Sericea Lespedeza Common Bermudagrass German Millet Tall Fescue	50 (lb/acre) 30 (lb/acre) 10 (lb/acre) 10 (lb/acre) 50 (lb/acre)

SEEDING DATES

LATE WINTER & EARLY SPRING:
 Mountains - Above 2500 ft: Feb. 15-May 15
 Piedmont - Jan. 1-May 1
 Coastal Plain - Dec. 1-Apr. 15

SUMMER:
 Mountains - May 15-Aug. 15
 Piedmont - May 1-Aug. 15
 Coastal Plain - Apr. 15-Aug. 15

FALL:
 Mountains - Aug. 15-Dec. 15
 Coastal Plain and Piedmont - Aug. 15-Dec. 30

SOIL AMENDMENTS:
 Follow recommendations of soil tests or apply 2,000 lb/acre ground agricultural limestone and 750 lb/acre 10-10-10 fertilizer.

MULCH:
 apply 4,000 lb/acre straw, anchor straw by tacking with asphalt, netting, or a mulch anchoring tool. A disk with blades set nearly straight can be used as a mulch anchoring tool.

MAINTENANCE:
 Refertilize if growth is not fully adequate, reseed, refertilize and mulch immediately following erosion or other damage.

SYMBOL	GROUND STABILIZATION CRITERIA		
	SITE AREA DESCRIPTION	STABILIZATION TIMEFRAME	STABILIZATION TIMEFRAME EXCEPTIONS
[Symbol: Perimeter dikes, swales, ditches and slopes]	* Perimeter dikes, swales, ditches and slopes	7 Days	None
[Symbol: High Quality Water (HQW) Zones]	* High Quality Water (HQW) Zones	7 Days	None
[Symbol: Steeper slopes]	* Slopes Steeper than 3:1	7 Days	If slopes are 10' or less in length and are not steeper than 2:1, 14 days are allowed
[Symbol: Flatter slopes]	* Slopes 3:1 or flatter	14 Days	7-days for slopes greater than 50 ft. in length
[Symbol: All other areas]	* All other areas with slopes flatter than 4:1	14 Days	None (except for perimeters & HQW Zones)

- MAINTENANCE PLAN:**
- ALL EROSION AND SEDIMENT CONTROL PRACTICES WILL BE CHECKED FOR STABILITY AND OPERATION FOLLOWING EVERY RUNOFF-PRODUCING RAINFALL, BUT IN NO CASE, LESS THAN ONCE EVERY WEEK AND WITHIN 24 HOURS OF EVERY HALF INCH RAINFALL.
 - ALL POINTS OF EGRESS WILL HAVE CONSTRUCTION ENTRANCES THAT WILL BE PERIODICALLY TOP-DRESSED WITH AN ADDITIONAL 2 INCHES OF 2-3 INCH STONE TO MAINTAIN PROPER DEPTH. THEY WILL BE MAINTAINED IN A CONDITION TO PREVENT MUD OR SEDIMENT FROM LEAVING THE SITE. IMMEDIATELY REMOVE OBJECTIONABLE MATERIAL SPILLED, WASHED OR TRACKED ONTO THE CONSTRUCTION ENTRANCE OR ROADWAYS.
 - SEDIMENT WILL BE REMOVED FROM HARDWARE CLOTH AND GRAVEL INLET PROTECTION, ROCK DOUGHNUT INLET PROTECTION, SEDIMENT TRAP BAFFLES, AND ROCK PIPE INLET PROTECTION WHEN THE DESIGNED STORAGE CAPACITY HAS BEEN HALF FILLED WITH SEDIMENT. ROCK WILL BE CLEANED OR REPLACED WHEN THE SEDIMENT POOL NO LONGER DRAINS AS DESIGNED. DEBRIS WILL BE REMOVED FROM THE ROCK AND HARDWARE CLOTH TO ALLOW PROPER DRAINAGE. SILT SACKS WILL BE EMPTIED ONCE A WEEK AND AFTER EVERY RAIN EVENT. SEDIMENT WILL BE REMOVED FROM AROUND BEAVER DAMS, DANDY SACKS AND SOCKS ONCE A WEEK AND AFTER EVERY RAIN EVENT.
 - SEDIMENT WILL BE REMOVED FROM BEHIND THE SEDIMENT FENCE WHEN IT BECOMES HALF FILLED. THE SEDIMENT FENCE WILL BE REPAIRED AS NECESSARY TO MAINTAIN A BARRIER. STAKES MUST BE STEEL. STAKE SPACING WILL BE 6 FEET MAX. WITH THE USE OF EXTRA STRENGTH FABRIC, WITHOUT WIRE BACKING. STAKE SPACING WILL BE 8 FEET MAX WHEN STANDARD STRENGTH FABRIC AND WIRE BACKING ARE USED. IF ROCK FILTERS ARE DESIGNED AT LOW POINTS IN THE IN THE SEDIMENT FENCE THE ROCK WILL BE REPAIRED OR REPLACED IF IT BECOMES HALF FULL OF SEDIMENT, NO LONGER DRAINS AS DESIGNED OR IS DAMAGED.

- CONSTRUCTION SEQUENCE:**
- CONSTRUCTION OF SITE TO START WITH INSTALLATION OF CONSTRUCTION ENTRANCE AND SILT FENCE ALONG ALL LOCATIONS PER PLANS. UPON INSTALLATION OF SILT FENCE, TREES SHOULD BE REMOVED IN LOCATIONS AS NECESSARY. ALL SLOPED AREAS SHOULD BE SEED IN ACCORDANCE TO SPECIFICATIONS. SLOPE STABILIZATION IS WITHIN 7-14 CALENDAR DAYS OF ANY PHASE OF CONSTRUCTION. ALL OTHER AREAS MUST BE STABILIZED WITHIN 15 WORKING DAYS. CONTRACTOR TO FOLLOW NCDPS STABILIZATION REQUIREMENTS PER TABLE ON THIS SHEET AS WELL. MOST STRINGENT REQUIREMENT TO BE MET.
- GENERAL CLEARING AND GRADING OF THIS SITE WILL NOT BE DONE UNTIL THE TEMPORARY SILT FENCE & CONSTRUCTION ENTRANCE HAS BEEN INSTALLED.
 - NO CUT SLOPE OR FILL SLOPE SHALL EXCEED A RISE OR FALL OF ONE FOOT FOR EVERY RUN OF 3 FEET (1 VERTICAL TO 3 HORIZONTAL).
 - NO SEDIMENT WILL BE ALLOWED TO EXIT THE SITE. ALL EROSION SHALL BE CONTROLLED INCLUDING SIDE SLOPES DURING AND AFTER CONSTRUCTION. INSTALL PRIMARY EROSION CONTROL MEASURES BEFORE BEGINNING CONSTRUCTION INCLUDING BUT NOT LIMITED TO GRAVELED CONSTRUCTION ENTRANCE, SILT FENCE, TREE PROTECTION FENCE & SEDIMENT BASINS. INSTALL ALL SECONDARY EROSION CONTROL MEASURES, SUCH AS INLET PROTECTION AS SOON AS POSSIBLE AFTER BEGINNING CONSTRUCTION.
 - ALL EROSION CONTROL MEASURES TO BE INSPECTED AFTER EACH RAIN. SILT FENCE AND INLET PROTECTION TO BE CLEANED WHEN HALF FULL.
 - A 4" LAYER OF TOPSOIL SHALL BE APPLIED TO ALL NEW AREAS TO BE GRASSED.
 - MAINTAIN ALL EROSION CONTROL MEASURES UNTIL PROJECT IS COMPLETE.
 - MORE STRINGENT MEASURES MAY BE REQUIRED TO HALT EROSION IF THOSE ON THIS PLAN PROVE TO BE LESS EFFECTIVE.
 - REMOVE ALL TEMPORARY EROSION CONTROL MEASURES UPON COMPLETION OF CONSTRUCTION. ALL PERMANENT MEASURES SHALL BE WELL ESTABLISHED PRIOR TO PROJECT COMPLETION.


SEAL REDACT

CLIENT INFORMATION:
 AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

DRAWN: JAE SHEET SIZE: 24 X 36
 CHECKED: CDC DATE: 2/26/2021
 APPROVED: CDC SCALE: 1" = 30'
 PROJECT NUMBER: 2020-029

DRAWING NUMBER: **C-2**
 3 OF 6

APPROVED CONSTRUCTION PERMIT
 DATED: 3/11/21
 PROJECT #: 2020054
 STORMWATER PERMIT #: 2021012

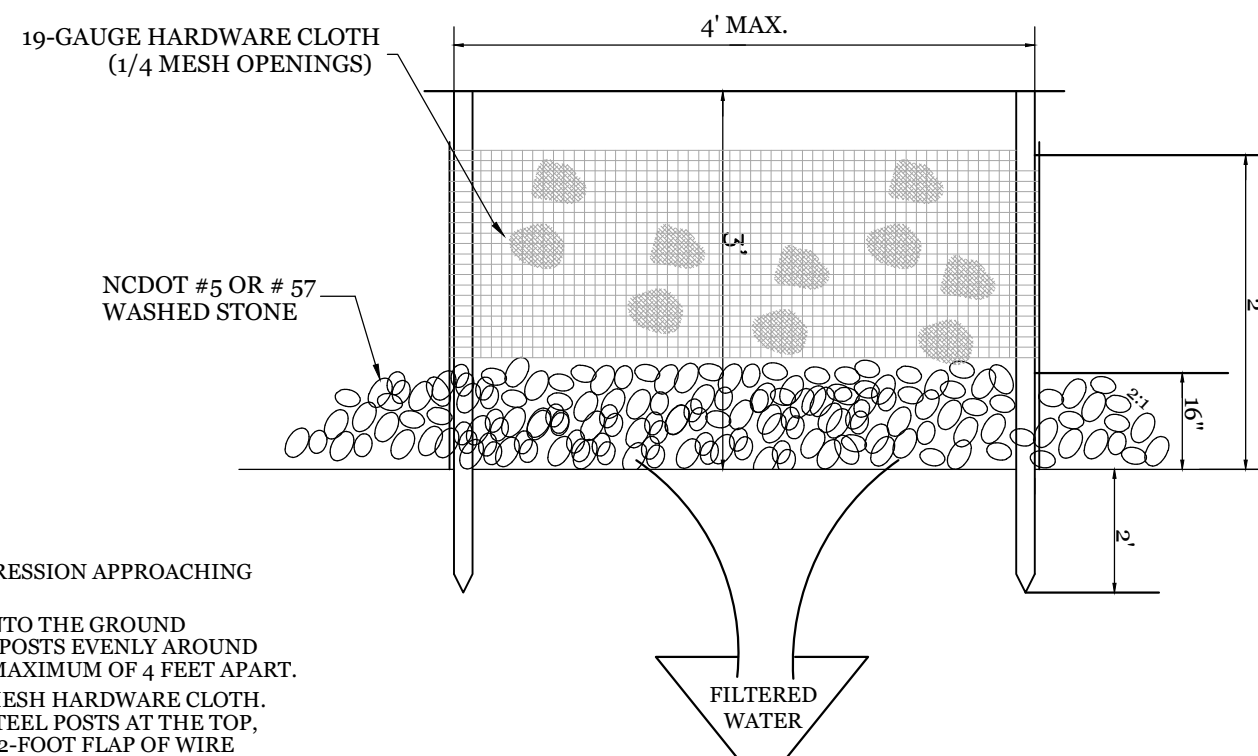

CONSTRUCTION SPECIFICATIONS:

- UNIFORMLY GRADE A SHALLOW DEPRESSION APPROACHING THE INLET.
- DRIVE 5-FOOT STEEL POSTS 2 FEET INTO THE GROUND SURROUNDING THE INLET. SPACE POSTS EVENLY AROUND THE PERIMETER OF THE INLET, A MAXIMUM OF 4 FEET APART.
- SURROUND THE POSTS WITH WIRE MESH HARDWARE CLOTH. SECURE THE WIRE MESH TO THE STEEL POSTS AT THE TOP, MIDDLE, AND BOTTOM. PLACING A 2-FOOT FLAP OF WIRE MESH UNDER THE GRAVEL FOR ANCHORING IS RECOMMENDED.
- PLACE CLEAN GRAVEL (NCDOT #5 OR #57 STONE) ON A 2:1 SLOPE WITH A HEIGHT OF 16 INCHES AROUND THE WIRE, AND SMOOTH TO AN EVEN GRADE.
- ONCE THE CONTRIBUTING DRAINAGE AREA HAS BEEN STABILIZED, REMOVE ACCUMULATED SEDIMENT, AND ESTABLISH FINAL GRADING ELEVATIONS.
- COMPACT THE AREA PROPERLY AND STABILIZED IT WITH GROUND COVER.


MAINTENANCE:

INSPECT INLETS AT LEAST WEEKLY AND AFTER EACH SIGNIFICANT (1/2 INCH OR GREATER) RAINFALL EVENT. CLEAR THE MESH WIRE OF ANY DEBRIS OR OTHER OBJECTS TO PROVIDE ADEQUATE FLOW FOR SUBSEQUENT RAINS. TAKE CARE NOT TO DAMAGE OR UNDERCUT THE WIRE MESH DURING SEDIMENT REMOVAL. REPLACE STONE AS NEEDED.

HARDWARE CLOTH AND GRAVEL INLET PROTECTION
 NTS

SITE WORK NOTES:


- THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH EXISTING CONDITIONS BOTH ON AND ADJACENT TO THE SITE.
- CLEARING: CONTRACTOR SHALL REMOVE ALL TREES AND VEGETATION WITHIN LIMITS OF CONSTRUCTION UNLESS OTHERWISE DESIGNATED TO REMAIN.
- GRUBBING AND STRIPPING: CONTRACTOR SHALL RAKE AND REMOVE ROOTS, STUMPS, VEGETATION, DEBRIS, EXISTING STRUCTURES ABOVE AND BELOW GRADE, ORGANIC MATERIAL OR ANY OTHER UNSUITABLE MATERIAL WITHIN LIMITS OF CONSTRUCTION.
- MUCKING: CONTRACTOR SHALL COORDINATE WITH OWNER AND THEIR GEOTECHNICAL REPRESENTATIVE TO COORDINATE REMOVAL OF ANY SOFT AREAS.
- DISPOSAL: CLEARED, GRUBBED, STRIPPED OR OTHER WASTE MATERIAL SHALL BE REMOVED FROM SITE AND DISPOSED OF IN A PROPERLY PERMITTED FACILITY.
- FILL AND COMPACTION SHOULD COMPLY WITH GEOTECHNICAL RECOMMENDATIONS.
- THE CONTRACTOR SHALL NOTE THAT THE GRADING PLAN MAY NOT REPRESENT A BALANCED EARTHWORK CONDITION. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CUT AND FILL QUANTITIES AND COMPLETE INSTALLATION TO SPECIFIED GRADES.
- THE CONTRACTOR SHALL FURNISH SUITABLE BORROW MATERIAL FROM AN OFF-SITE PROPERLY PERMITTED FACILITY AS REQUIRED.
- INFORMATION CONCERNING UNDERGROUND UTILITIES WAS OBTAINED FROM AVAILABLE RECORDS. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO DETERMINE THE EXACT ELEVATIONS AND LOCATIONS OF ALL EXISTING UTILITIES AT ALL CROSSINGS PRIOR TO COMMENCING TRENCH EXCAVATION. IF ACTUAL CLEARANCES ARE LESS THAN INDICATED ON PLAN, THE CONTRACTOR SHALL CONTACT THE DESIGN ENGINEER BEFORE PROCEEDING WITH CONSTRUCTION. ANY CONDITION DISCOVERED OR EXISTING THAT WOULD NECESSITATE A MODIFICATION OF THESE PLANS SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGN ENGINEER BEFORE PROCEEDING WITH CONSTRUCTION.
- NO CONSTRUCTION IS TO BEGIN BEFORE LOCATION OF EXISTING UTILITIES HAS BEEN DETERMINED. CALL "NC ONE-CALL" AT LEAST 48 HOURS BEFORE COMMENCING CONSTRUCTION.
- THE CONTRACTOR IS RESPONSIBLE FOR THE LOCATION AND PROTECTION OF ALL EXISTING UTILITIES DURING CONSTRUCTION. BEFORE COMMENCING ANY EXCAVATIONS IN OR ALONG ROADWAYS OR RIGHT-OF-WAYS, PUBLIC AREAS OR IN PRIVATE EASEMENTS, THE CONTRACTOR SHALL NOTIFY ALL APPROPRIATE PERSONNEL OF THEIR INTENT TO EXCAVATE, IN WRITING, NOT LESS THAN 10 DAYS PRIOR TO EXCAVATING.
- THE CONTRACTOR SHALL BE RESPONSIBLE TO COORDINATE DISCONNECTION/ RECONNECTION AND/OR THE RELOCATION OF ALL EXISTING UTILITIES WITH APPROPRIATE PERSONNEL.
- CONTRACTOR SHALL ADJUST ALL MANHOLES, VALVE & CURB BOXES TO FINAL GRADE UPON COMPLETION OF ALL CONSTRUCTION. ANY BOXES DAMAGED OR OTHERWISE DISTURBED BY THE CONTRACTOR SHALL BE REPAIRED AT THE EXPENSE OF THE CONTRACTOR.
- THE CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AT THE SITE. FURTHERMORE THE CONTRACTOR SHALL REPORT ALL DISCREPANCIES OR QUESTIONS TO THE ENGINEER PRIOR TO INSTALLATION.
- THE CONTRACTOR SHALL PROVIDE ANY AND ALL LAYOUT REQUIRED TO CONSTRUCT HIS WORK UNLESS OTHERWISE DIRECTED BY OWNER.
- ALL SERVICE CONNECTIONS SHALL BE INSTALLED TO MEET ALL LOCAL, STATE, AND CFPWA CODES. METERS, TAPS, MATERIALS, WORKMANSHIP AND ALL FEES SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR AND SHALL COMPLY WITH ALL REQUIREMENTS.
- ALL BACKFILL FROM UTILITY INSTALLATION MUST BE COMPACTED OR AMENDED TO PROVIDE TRAFFIC BEARING CAPACITY. GEOTECHNICAL ENGINEER TO BE CONSULTED AT CONTRACTORS COST AS NECESSARY.
- ALL AREAS SHALL BE GRADED FOR POSITIVE DRAINAGE. CONTRACTOR SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO INSTALLATION. ALL AREAS SHALL BE SLOPED TO DRAIN AWAY FROM BUILDINGS AT ALL TIMES.
- CONCRETE FOR WALKS, CURBS AND DRIVES SHALL HAVE A MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI @ 28 DAYS - AIR ENTRAINED.
- FIELD TESTING SHALL BE DONE BY AN INDEPENDENT TESTING LABORATORY PAID FOR BY THE OWNER. FURTHER TESTING REQUIRED DUE TO A FAILED TEST WILL BE PAID FOR BY THE CONTRACTOR.
- ALL SIDEWALKS SHALL BE FREE OF CRACKS, BREAKS, OR ANY OTHER DEFECT PRIOR TO RECEIVING A CERTIFICATE OF OCCUPANCY.

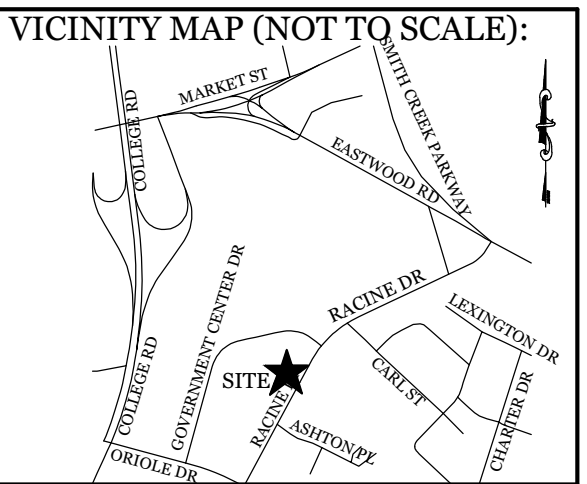

REVISIONS


NO.	DATE	DESCRIPTION

INTRACOASTAL ENGINEERING, PLLC
 5725 Oleander Dr. Unit E-7
 Wilmington, North Carolina 28403
 Phone: 910.859.8983
 Email: charlie@intracoastalengineering.com
 License Number P-0662

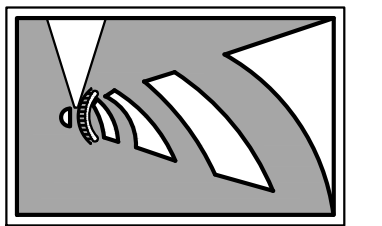

FOR 240 RACINE DR. OFFICE BUILDING
 WILMINGTON, NORTH CAROLINA


DETAILS

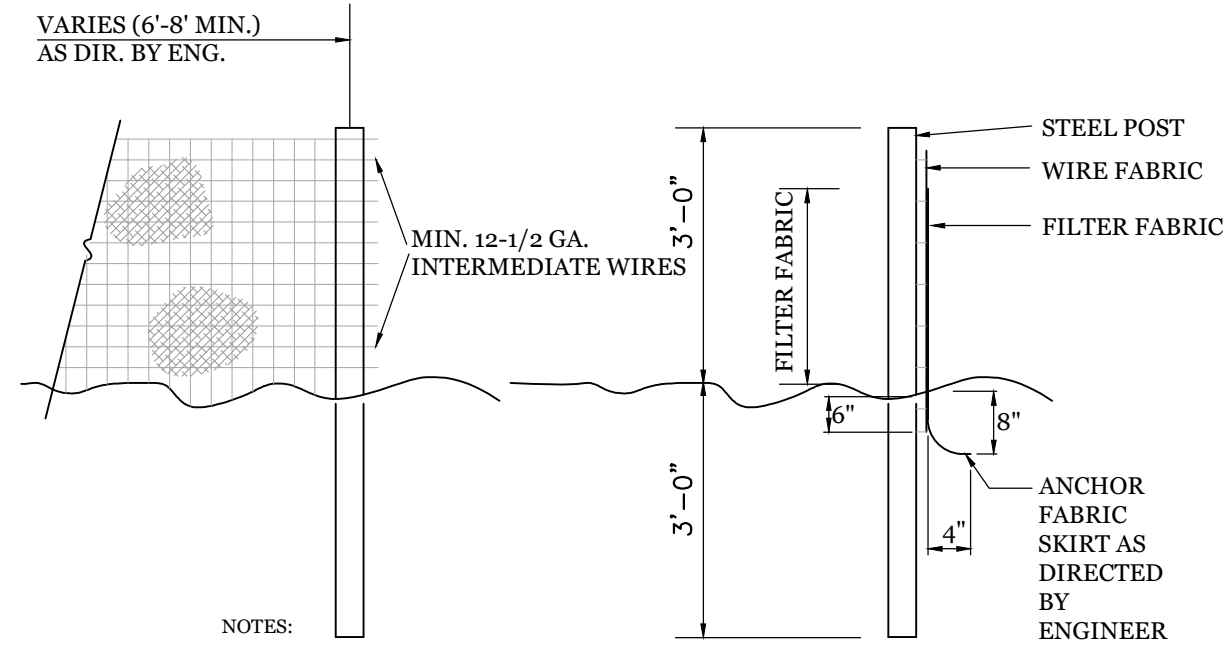

NOTES:


- FENCE FABRIC SHALL BE A MIN. OF 32" IN WIDTH AND SHALL HAVE A MIN. OF SIX LINE WIRES WITH 12" STAY SPACING.
- FABRIC SHALL BE FOR EROSION CONTROL AND MIN. OF 36" IN WIDTH. FABRIC SHALL BE FASTENED ADEQUATELY TO THE WIRE FABRIC AS DIRECTED BY THE ENGINEER.
- STEEL POST SHALL BE 5'-0" IN HEIGHT AND BE OF THE SELF-FASTENER STEEL ANGLE TYPE.

TEMPORARY SILT FENCE
 NTS

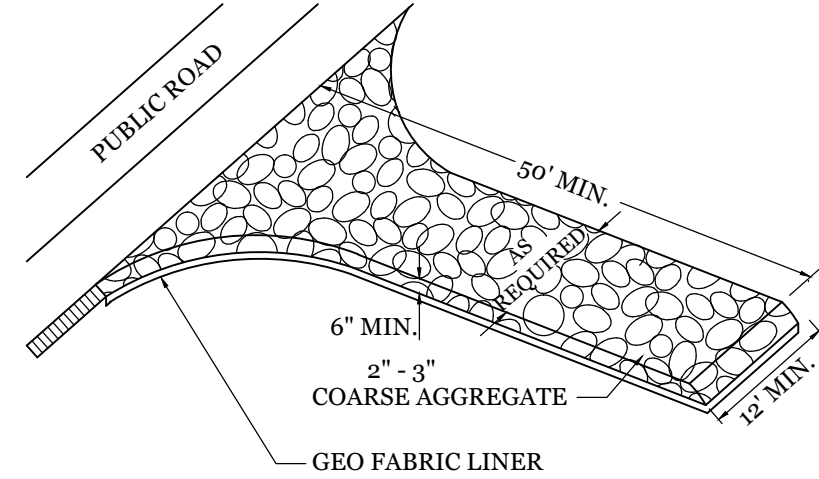


NOTE: CONSTRUCTION ENTRANCE TO BE 12' OR ENTIRE WIDTH OF ENTRANCE, WHICHEVER IS GREATER.


TEMPORARY GRAVEL CONSTRUCTION ENTRANCE
 NTS

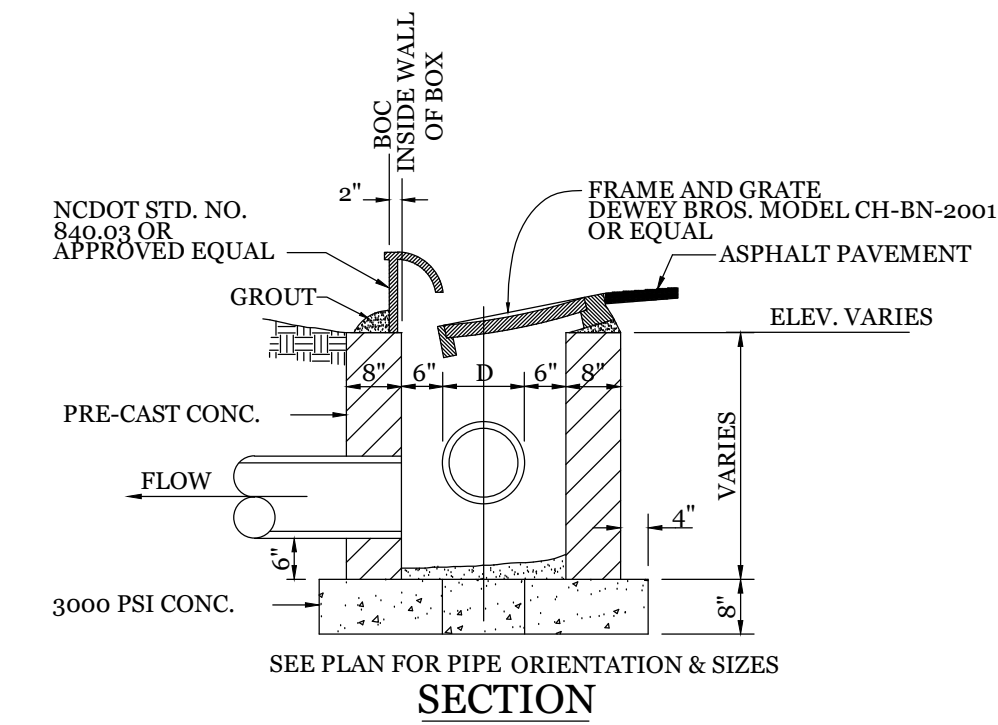

CURB INLET DETAIL
 NTS

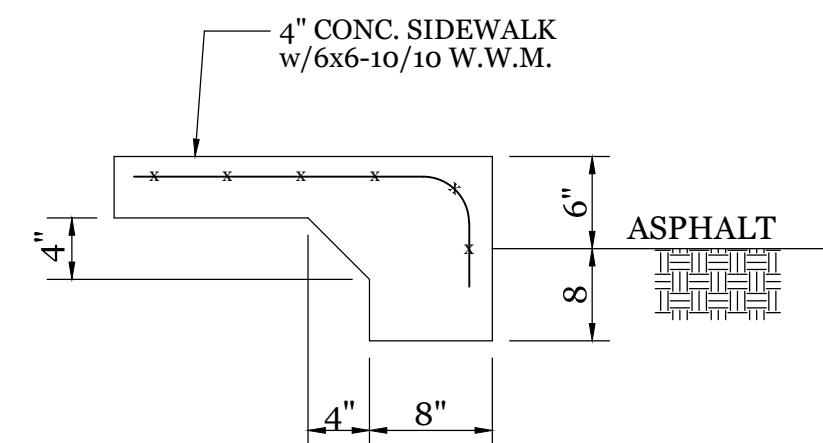


TURNDOWN SIDEWALK
 NTS


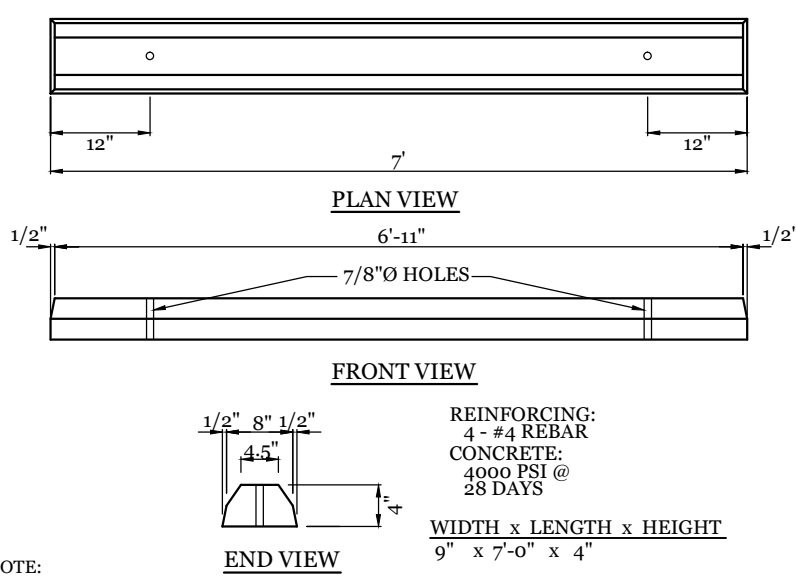


NOTE:
 1. CONTRACTOR SHALL INSTALL PER CITY OF WILMINGTON TECHNICAL STANDARD PER SD 15-43
 2. CONTRACTOR SHALL INSTALL WHEEL STOP 2'-0" FROM SIDEWALK.


WHEEL STOP DETAIL
 NTS

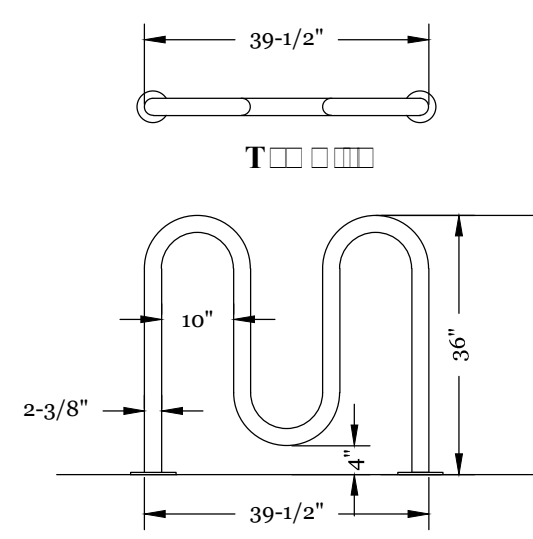

NOTES:
 1. TO BE PAINTED COLOR "RAL 9006"
WAVE STYLE BIKE RACK DETAIL
 5 BIKE RACK
 NTS

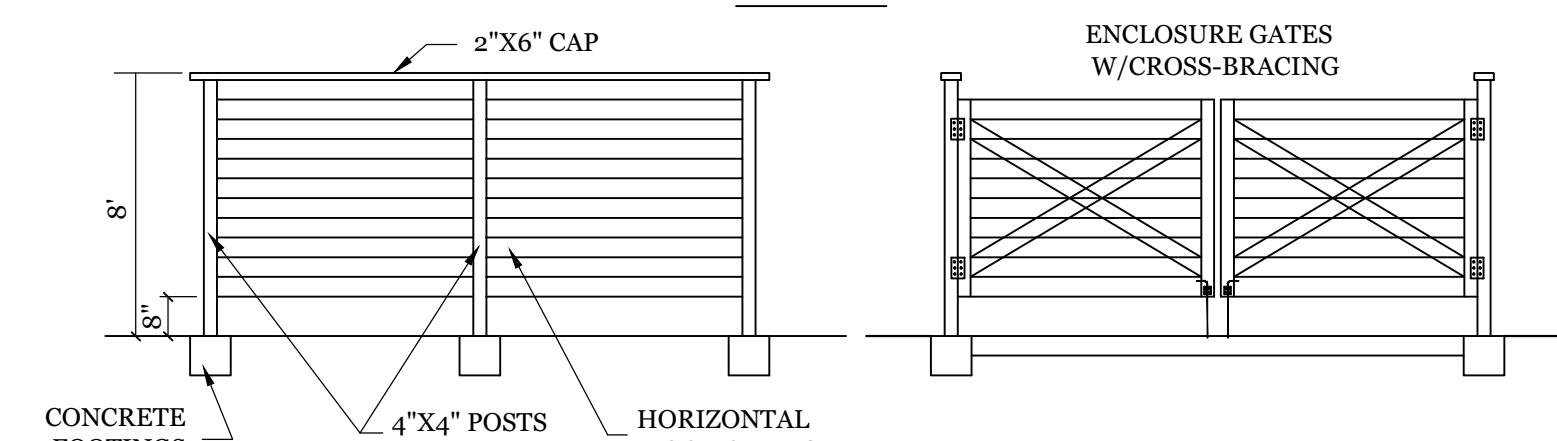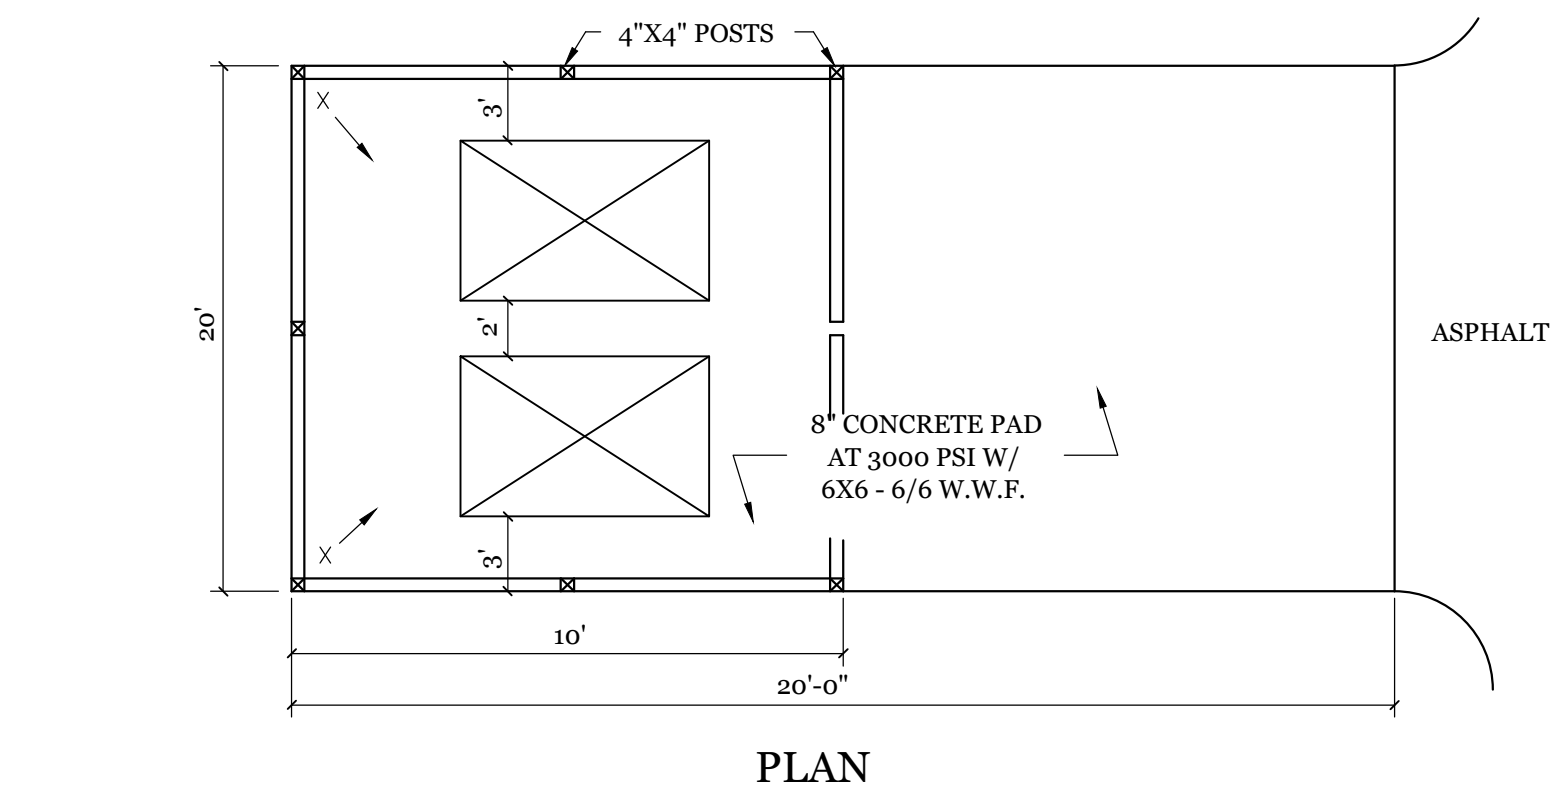

DUMPSTER PAD & ENCLOSURE DETAIL
 NTS

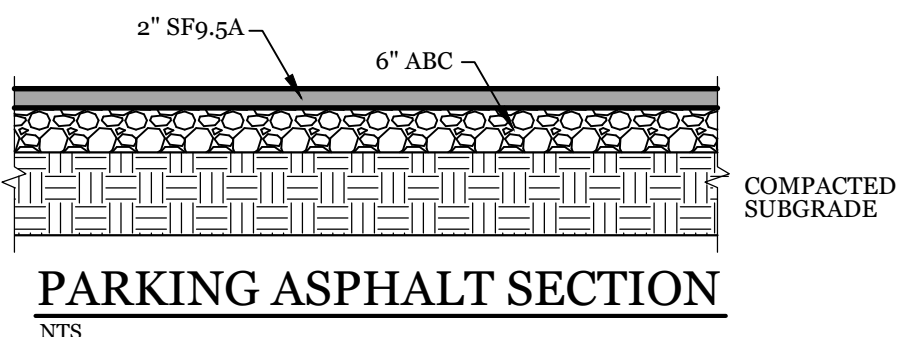


PARKING ASPHALT SECTION
 NTS

SEAL REDACT

CLIENT INFORMATION:
 AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

DRAWN: JAE	SHEET SIZE: 24 X 36
CHECKED: CDC	DATE: 2/26/2021
APPROVED: CDC	SCALE: NTS
PROJECT NUMBER: 2020-029	


DRAWING NUMBER: **C-3** 4 OF 6

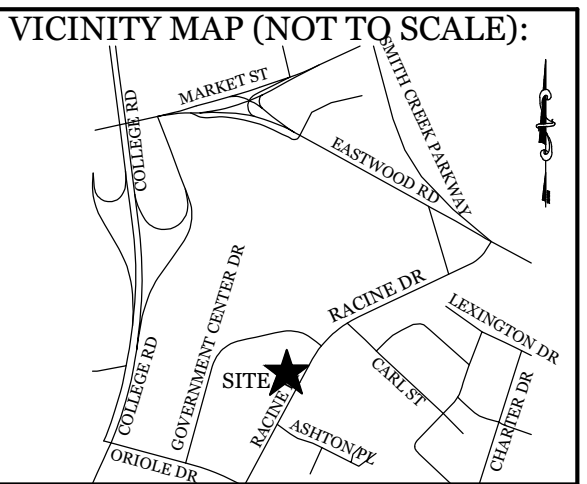



REVISIONS

NO.	DATE	DESCRIPTION

INTRACOASTAL ENGINEERING, PLLC
 5725 Oleander Dr, Unit E-7
 Wilmington, North Carolina 28403
 Phone: 910.859.8983
 Email: charlie@intracoastalengineering.com
 License Number P-0662





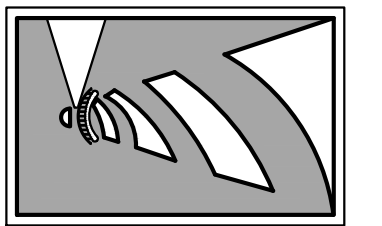


DETAILS
 FOR
240 RACINE DR.
OFFICE BUILDING
 WILMINGTON, NORTH CAROLINA

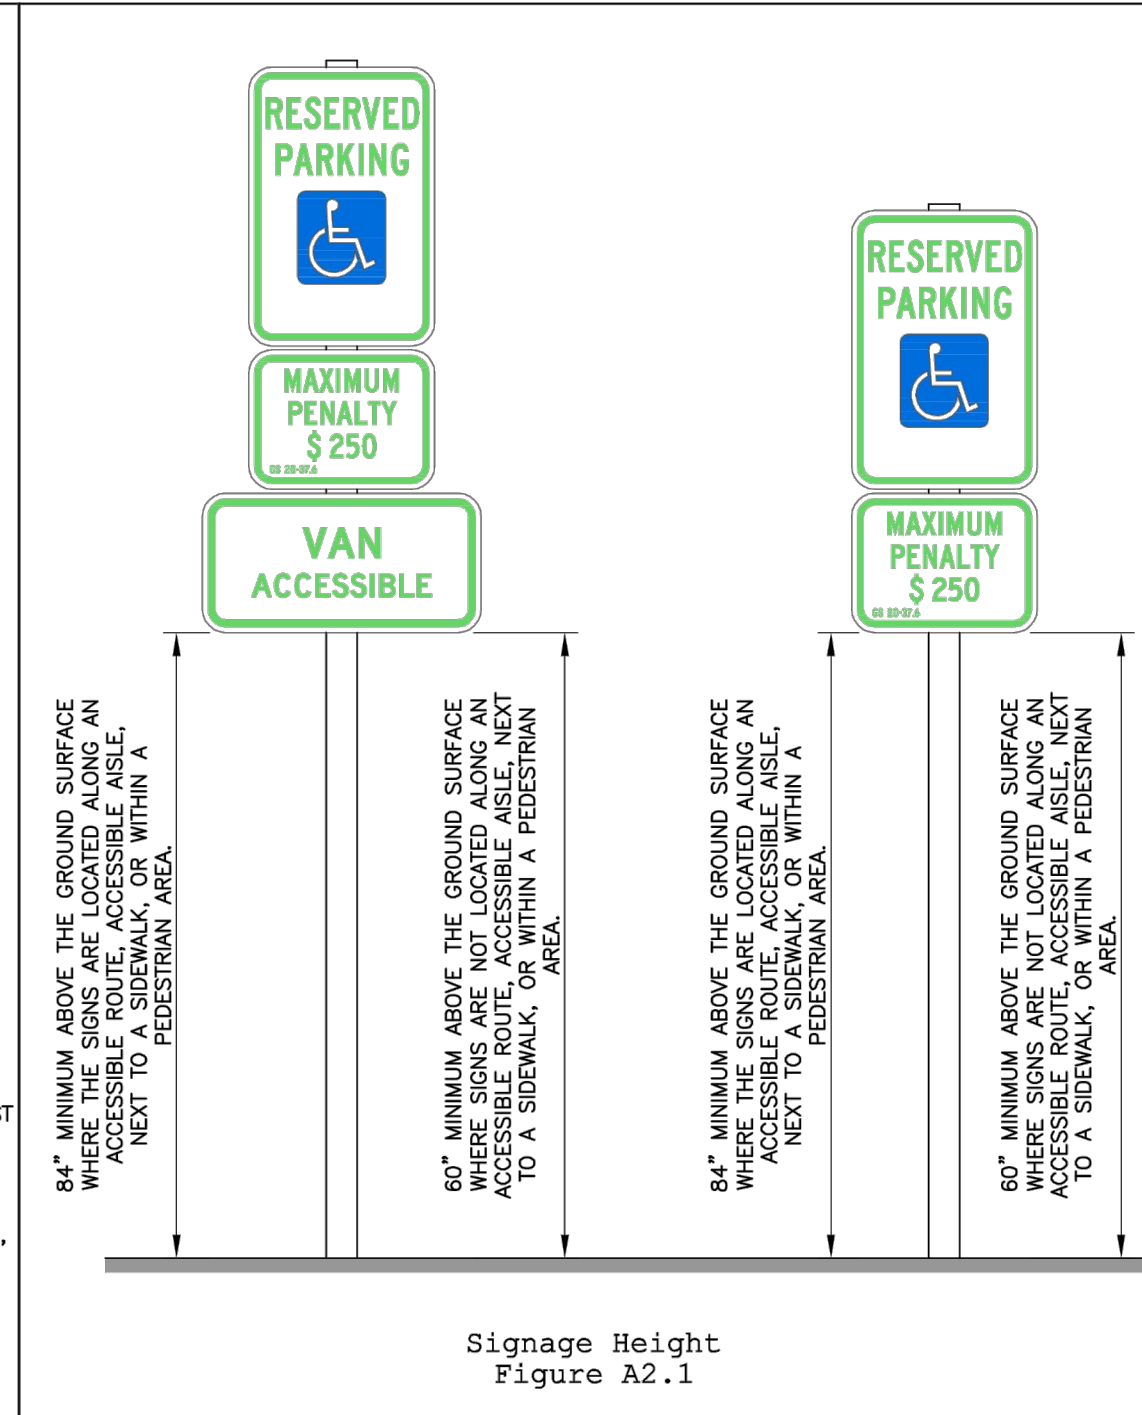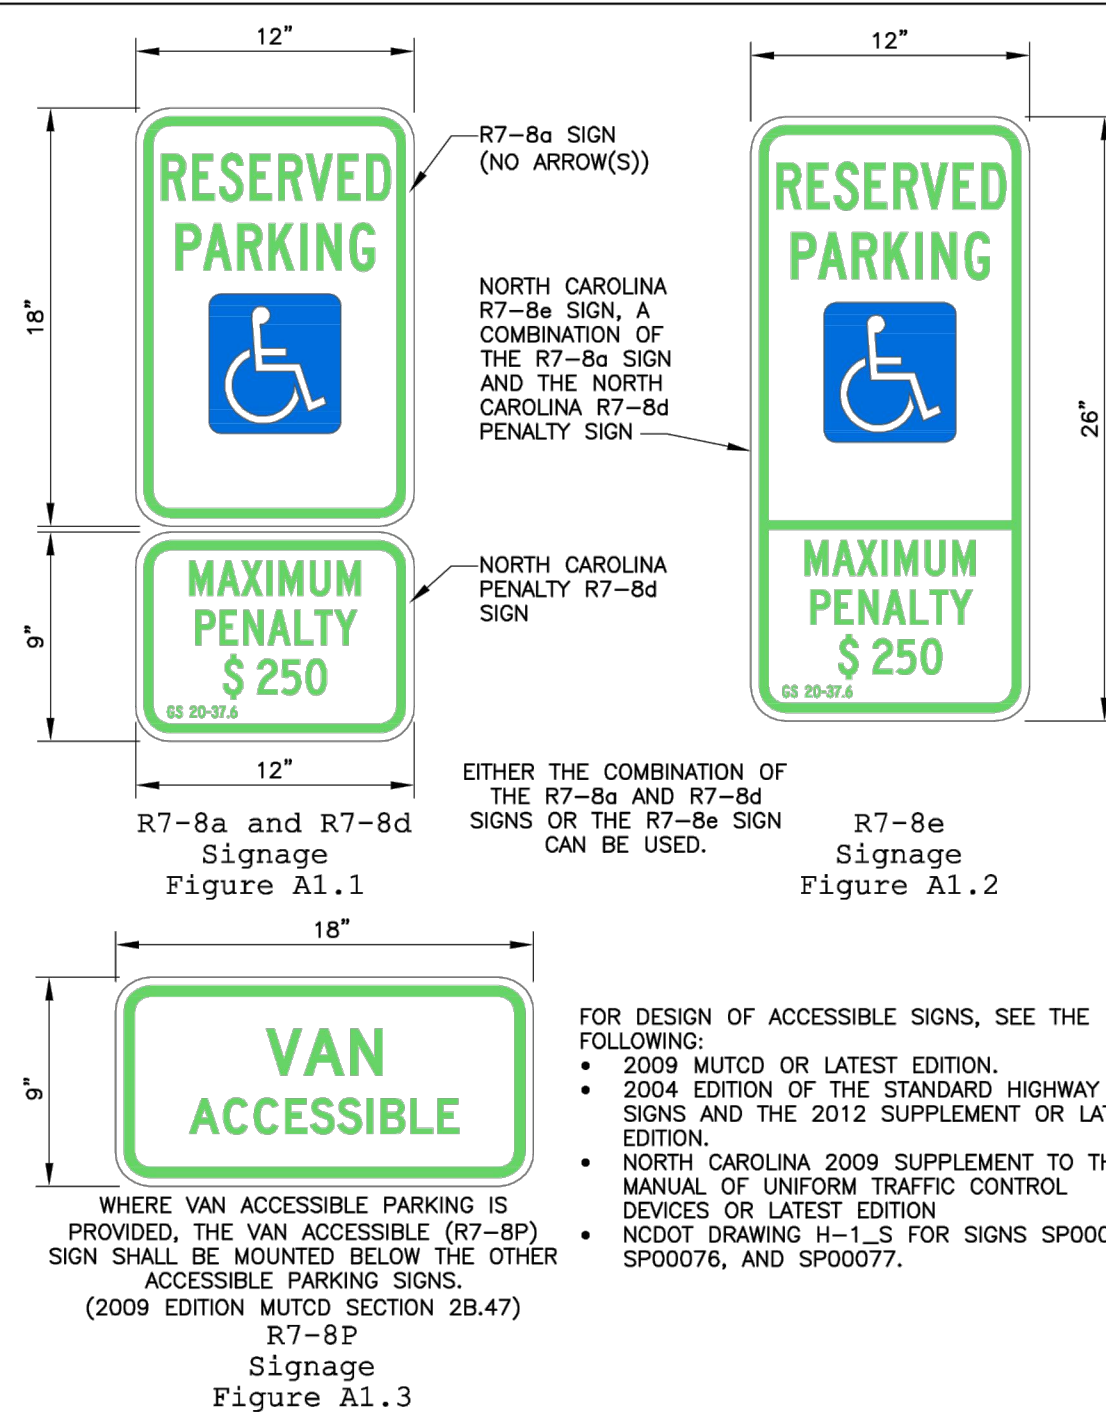

DATE: NOVEMBER 8, 2016
 DRAWN BY: DALE THOMPSON
 CHECKED BY: RANDALL GLAZIER
 SCALE: NOT TO SCALE


DATE: NOVEMBER 8, 2016
 DRAWN BY: DALE THOMPSON
 CHECKED BY: RANDALL GLAZIER
 SCALE: NOT TO SCALE

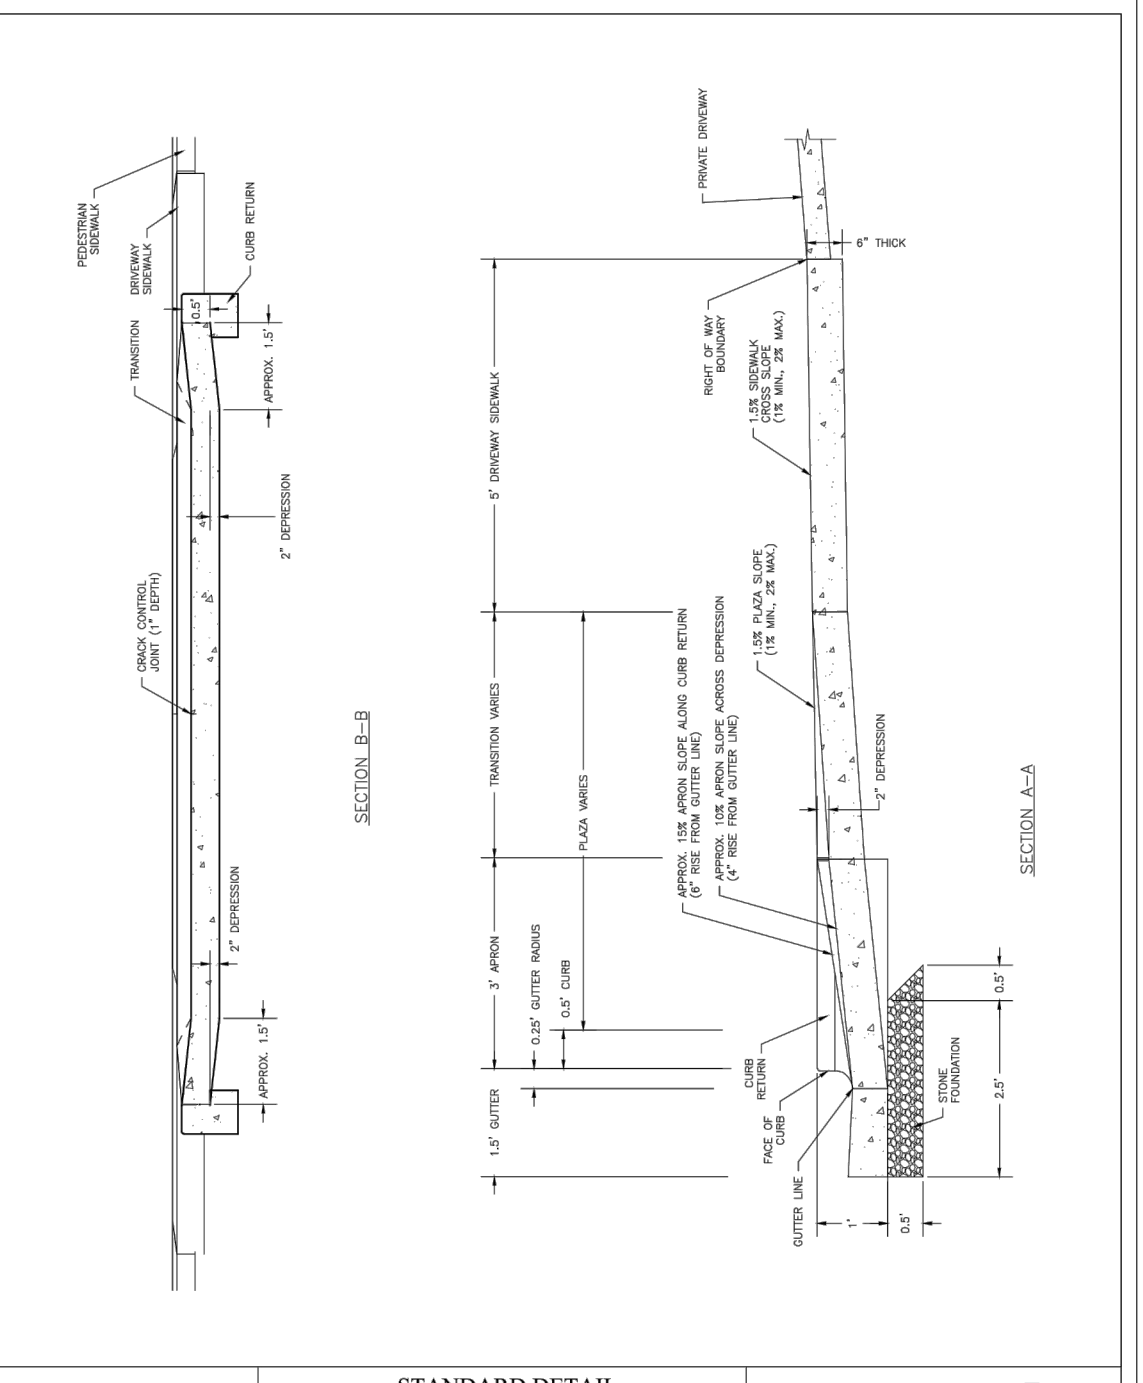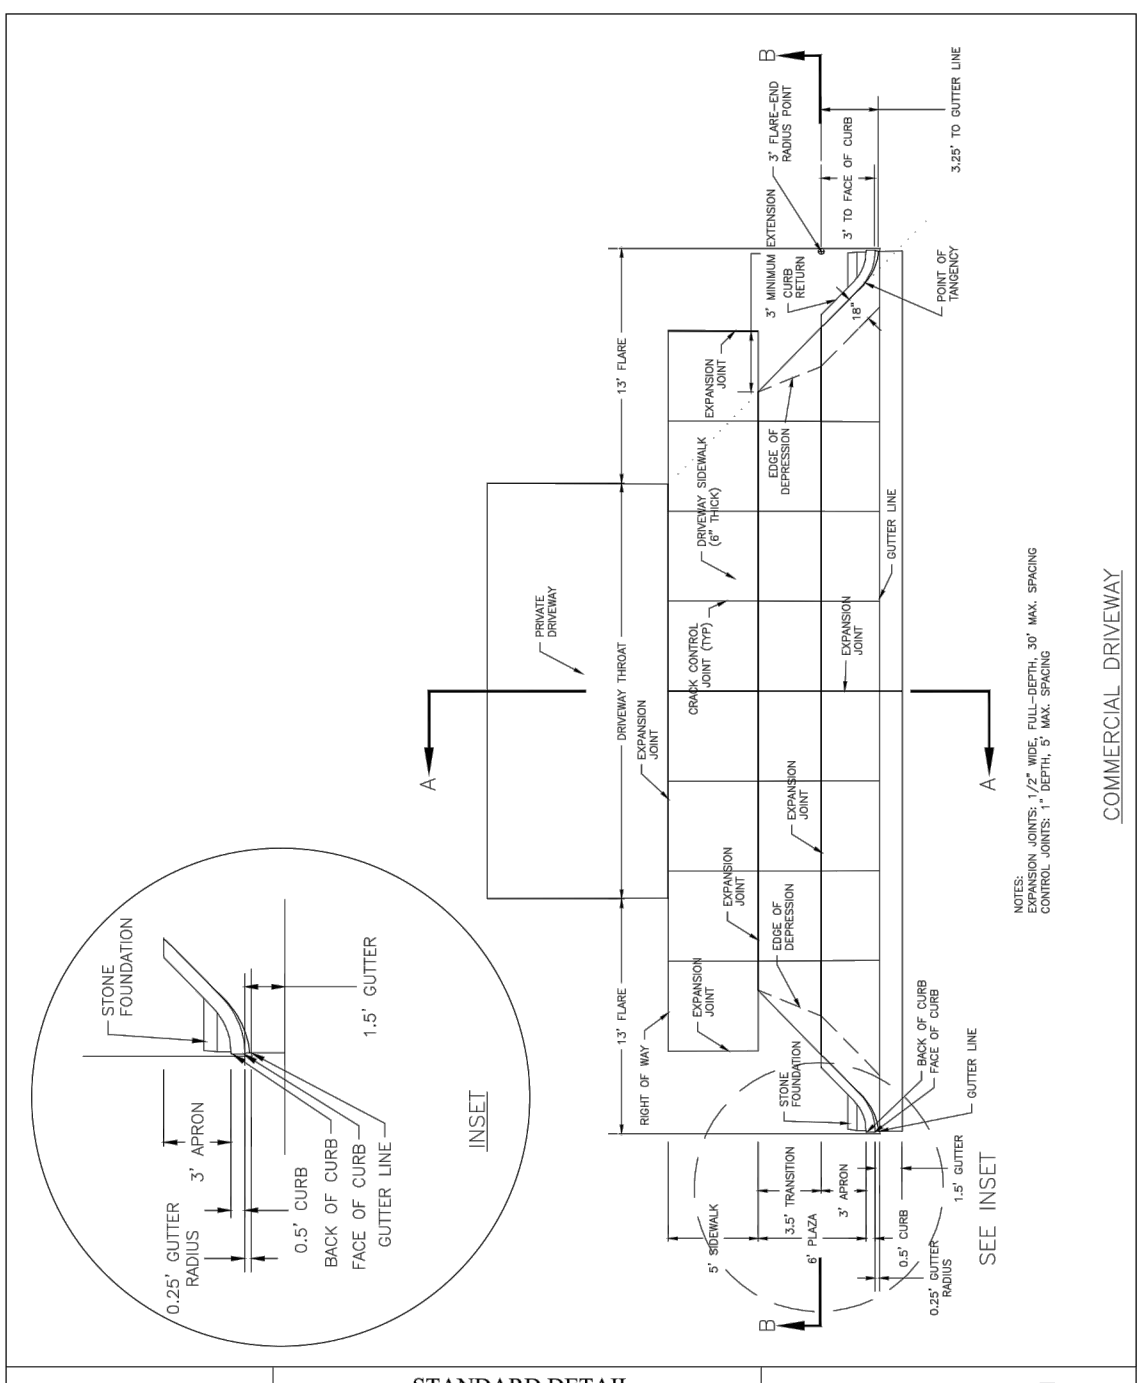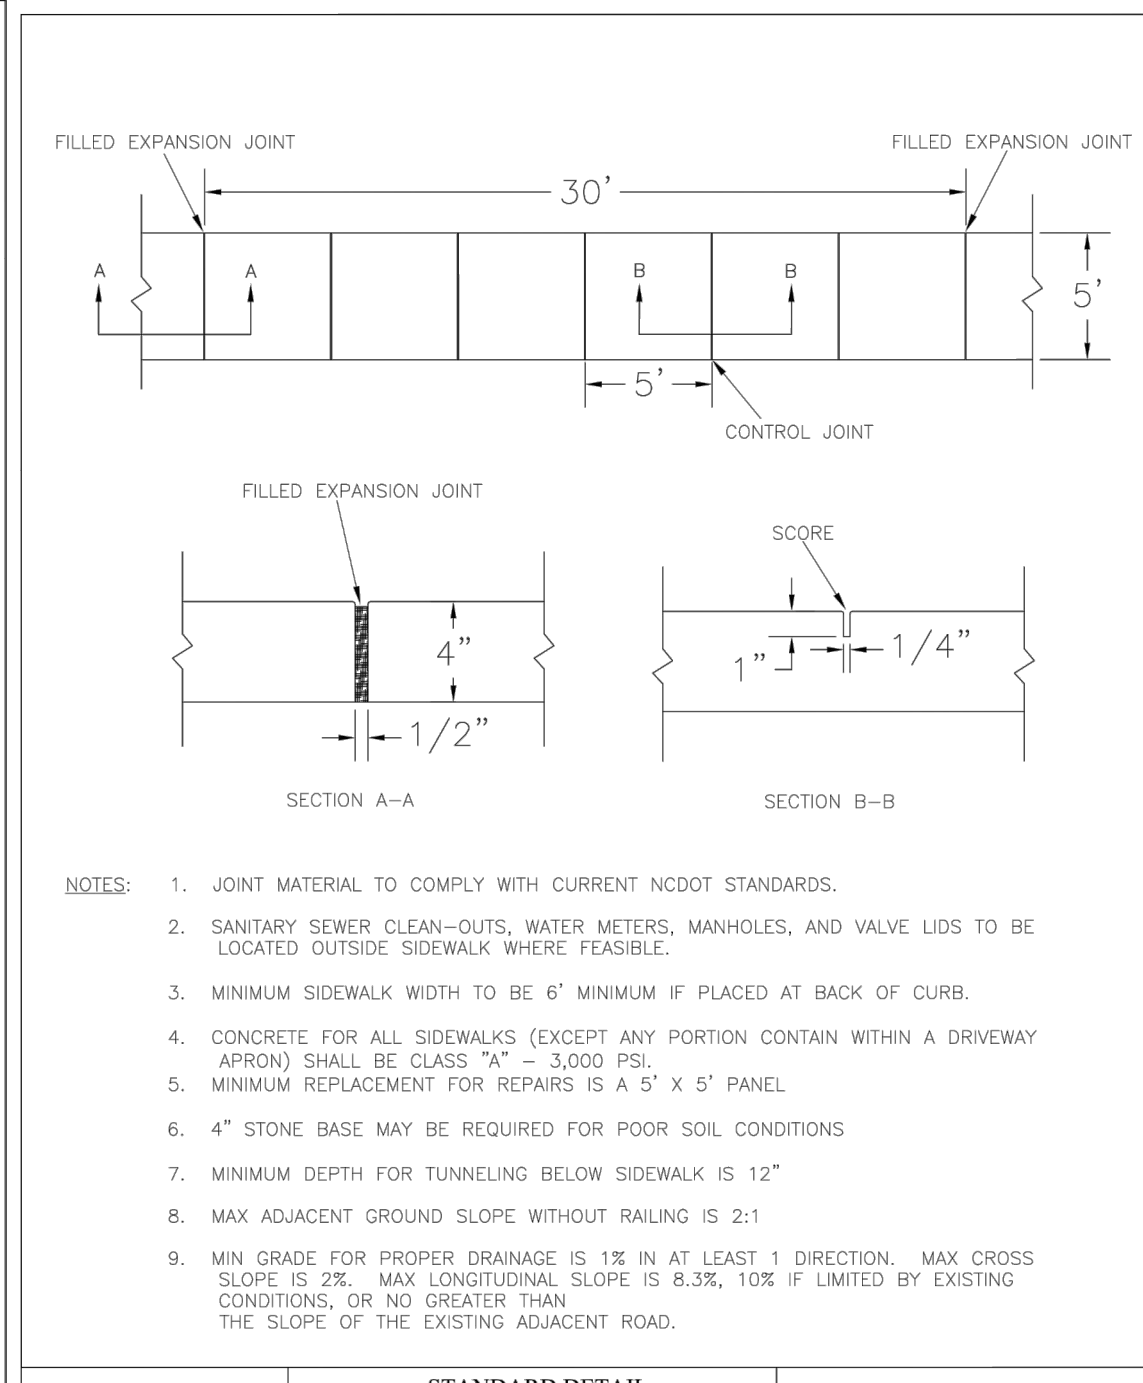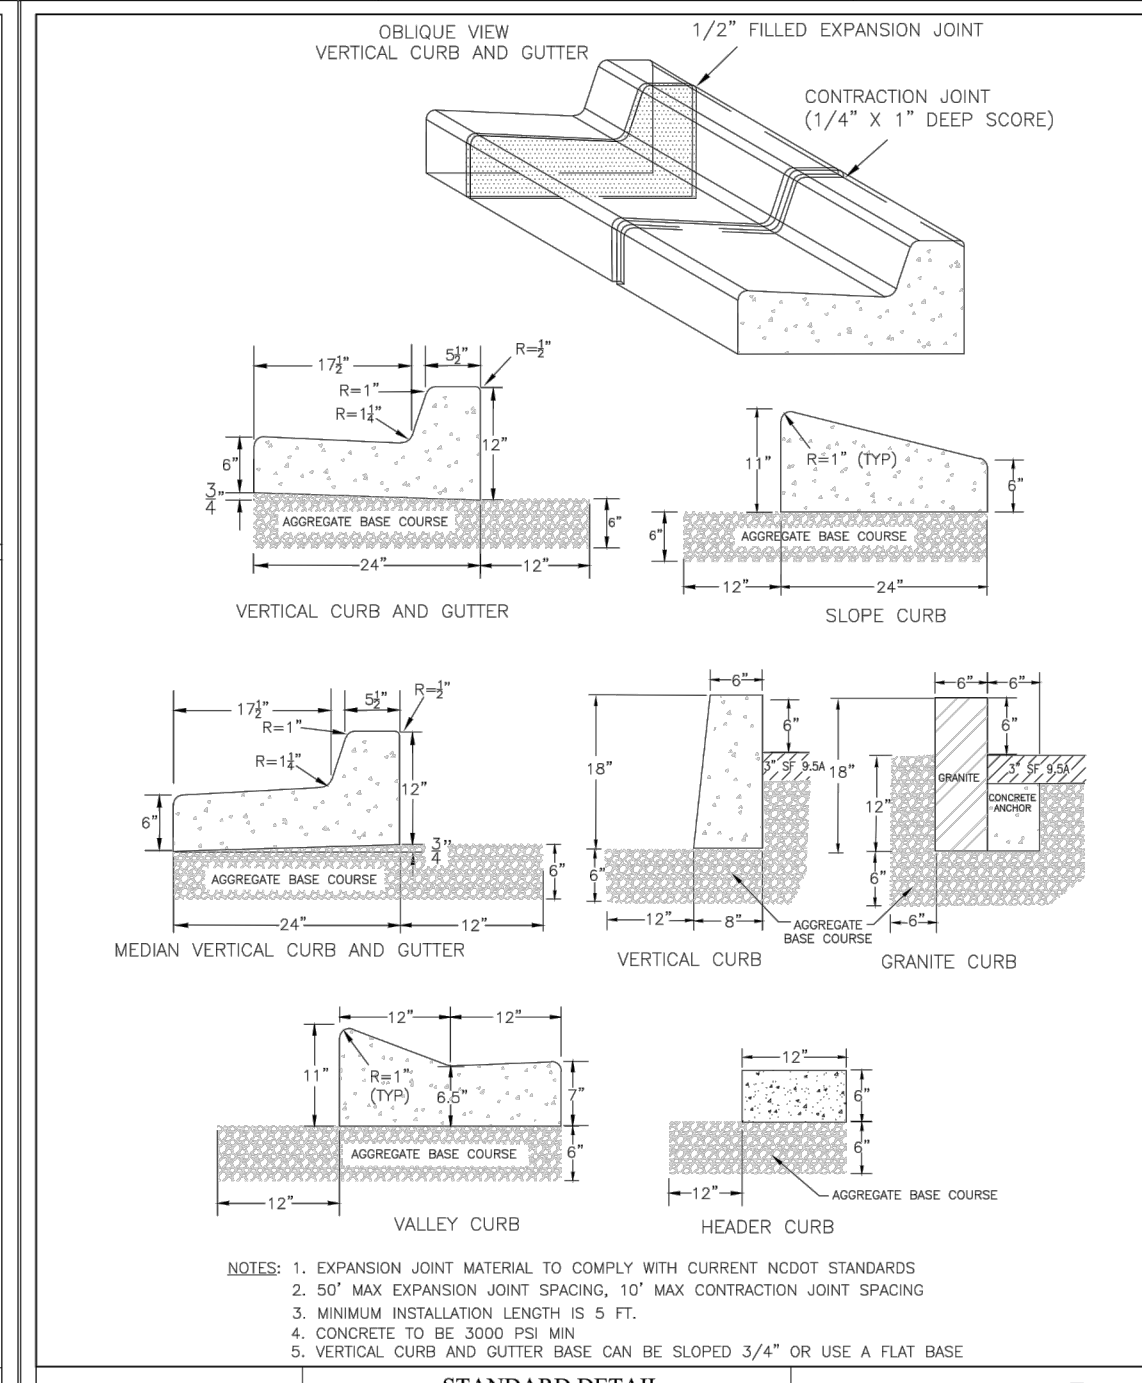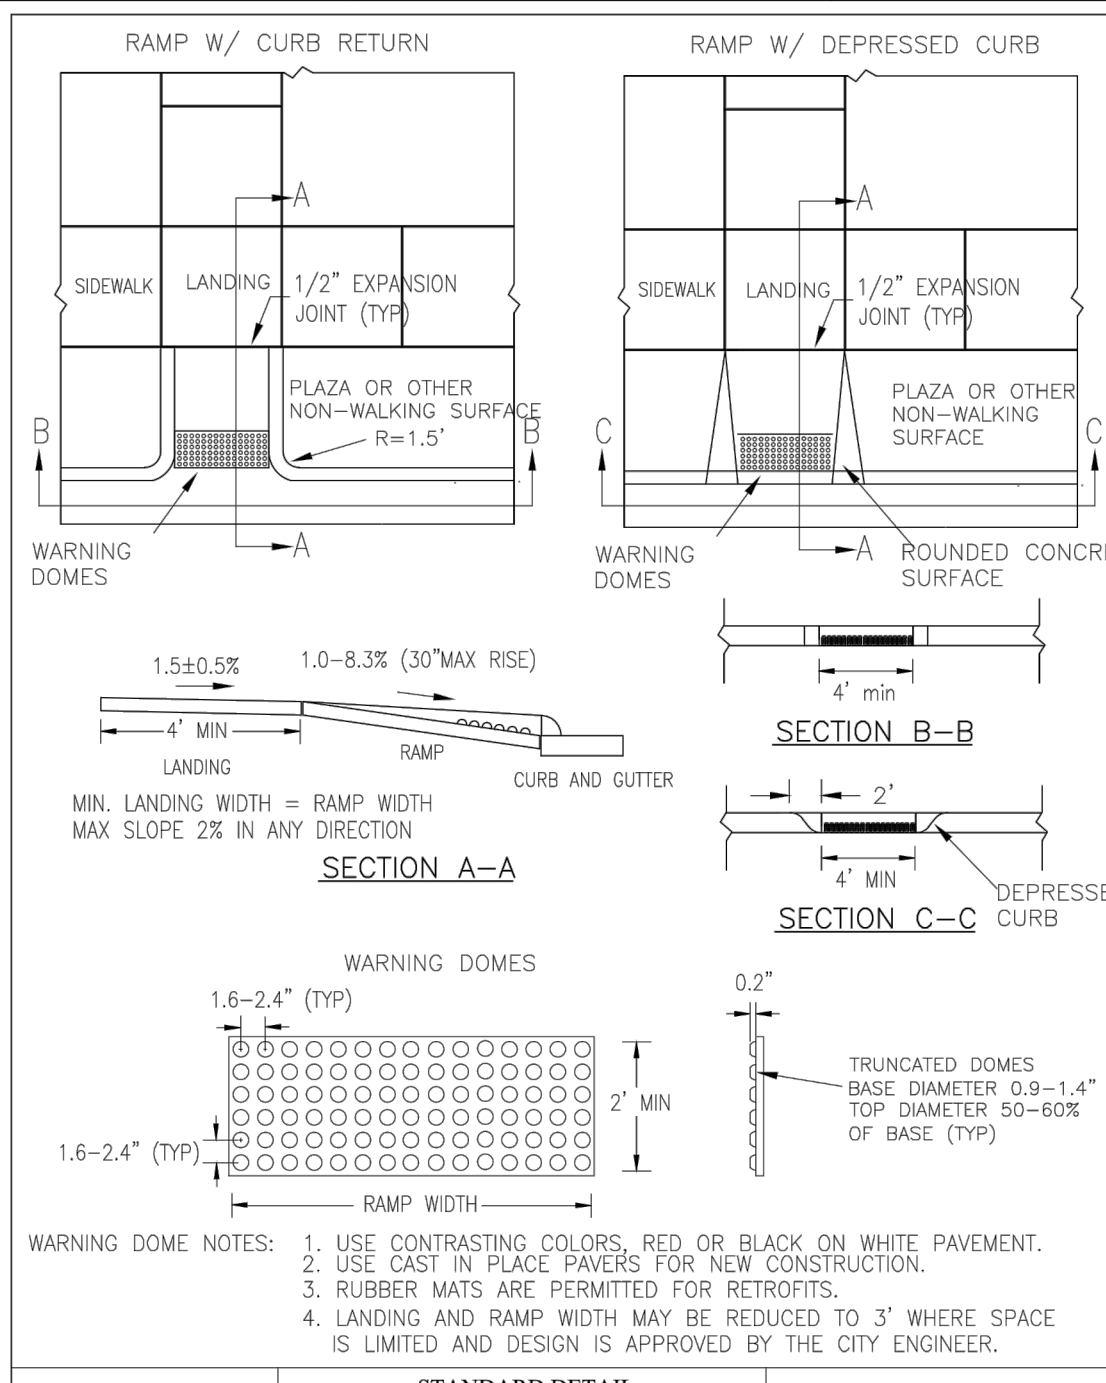

SEAL REDACT

CLIENT INFORMATION:
 AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

DRAWN: JAE SHEET SIZE: 24 X 36
 CHECKED: CDC DATE: 2/26/2021
 APPROVED: CDC SCALE: NTS
 PROJECT NUMBER: 2020-029

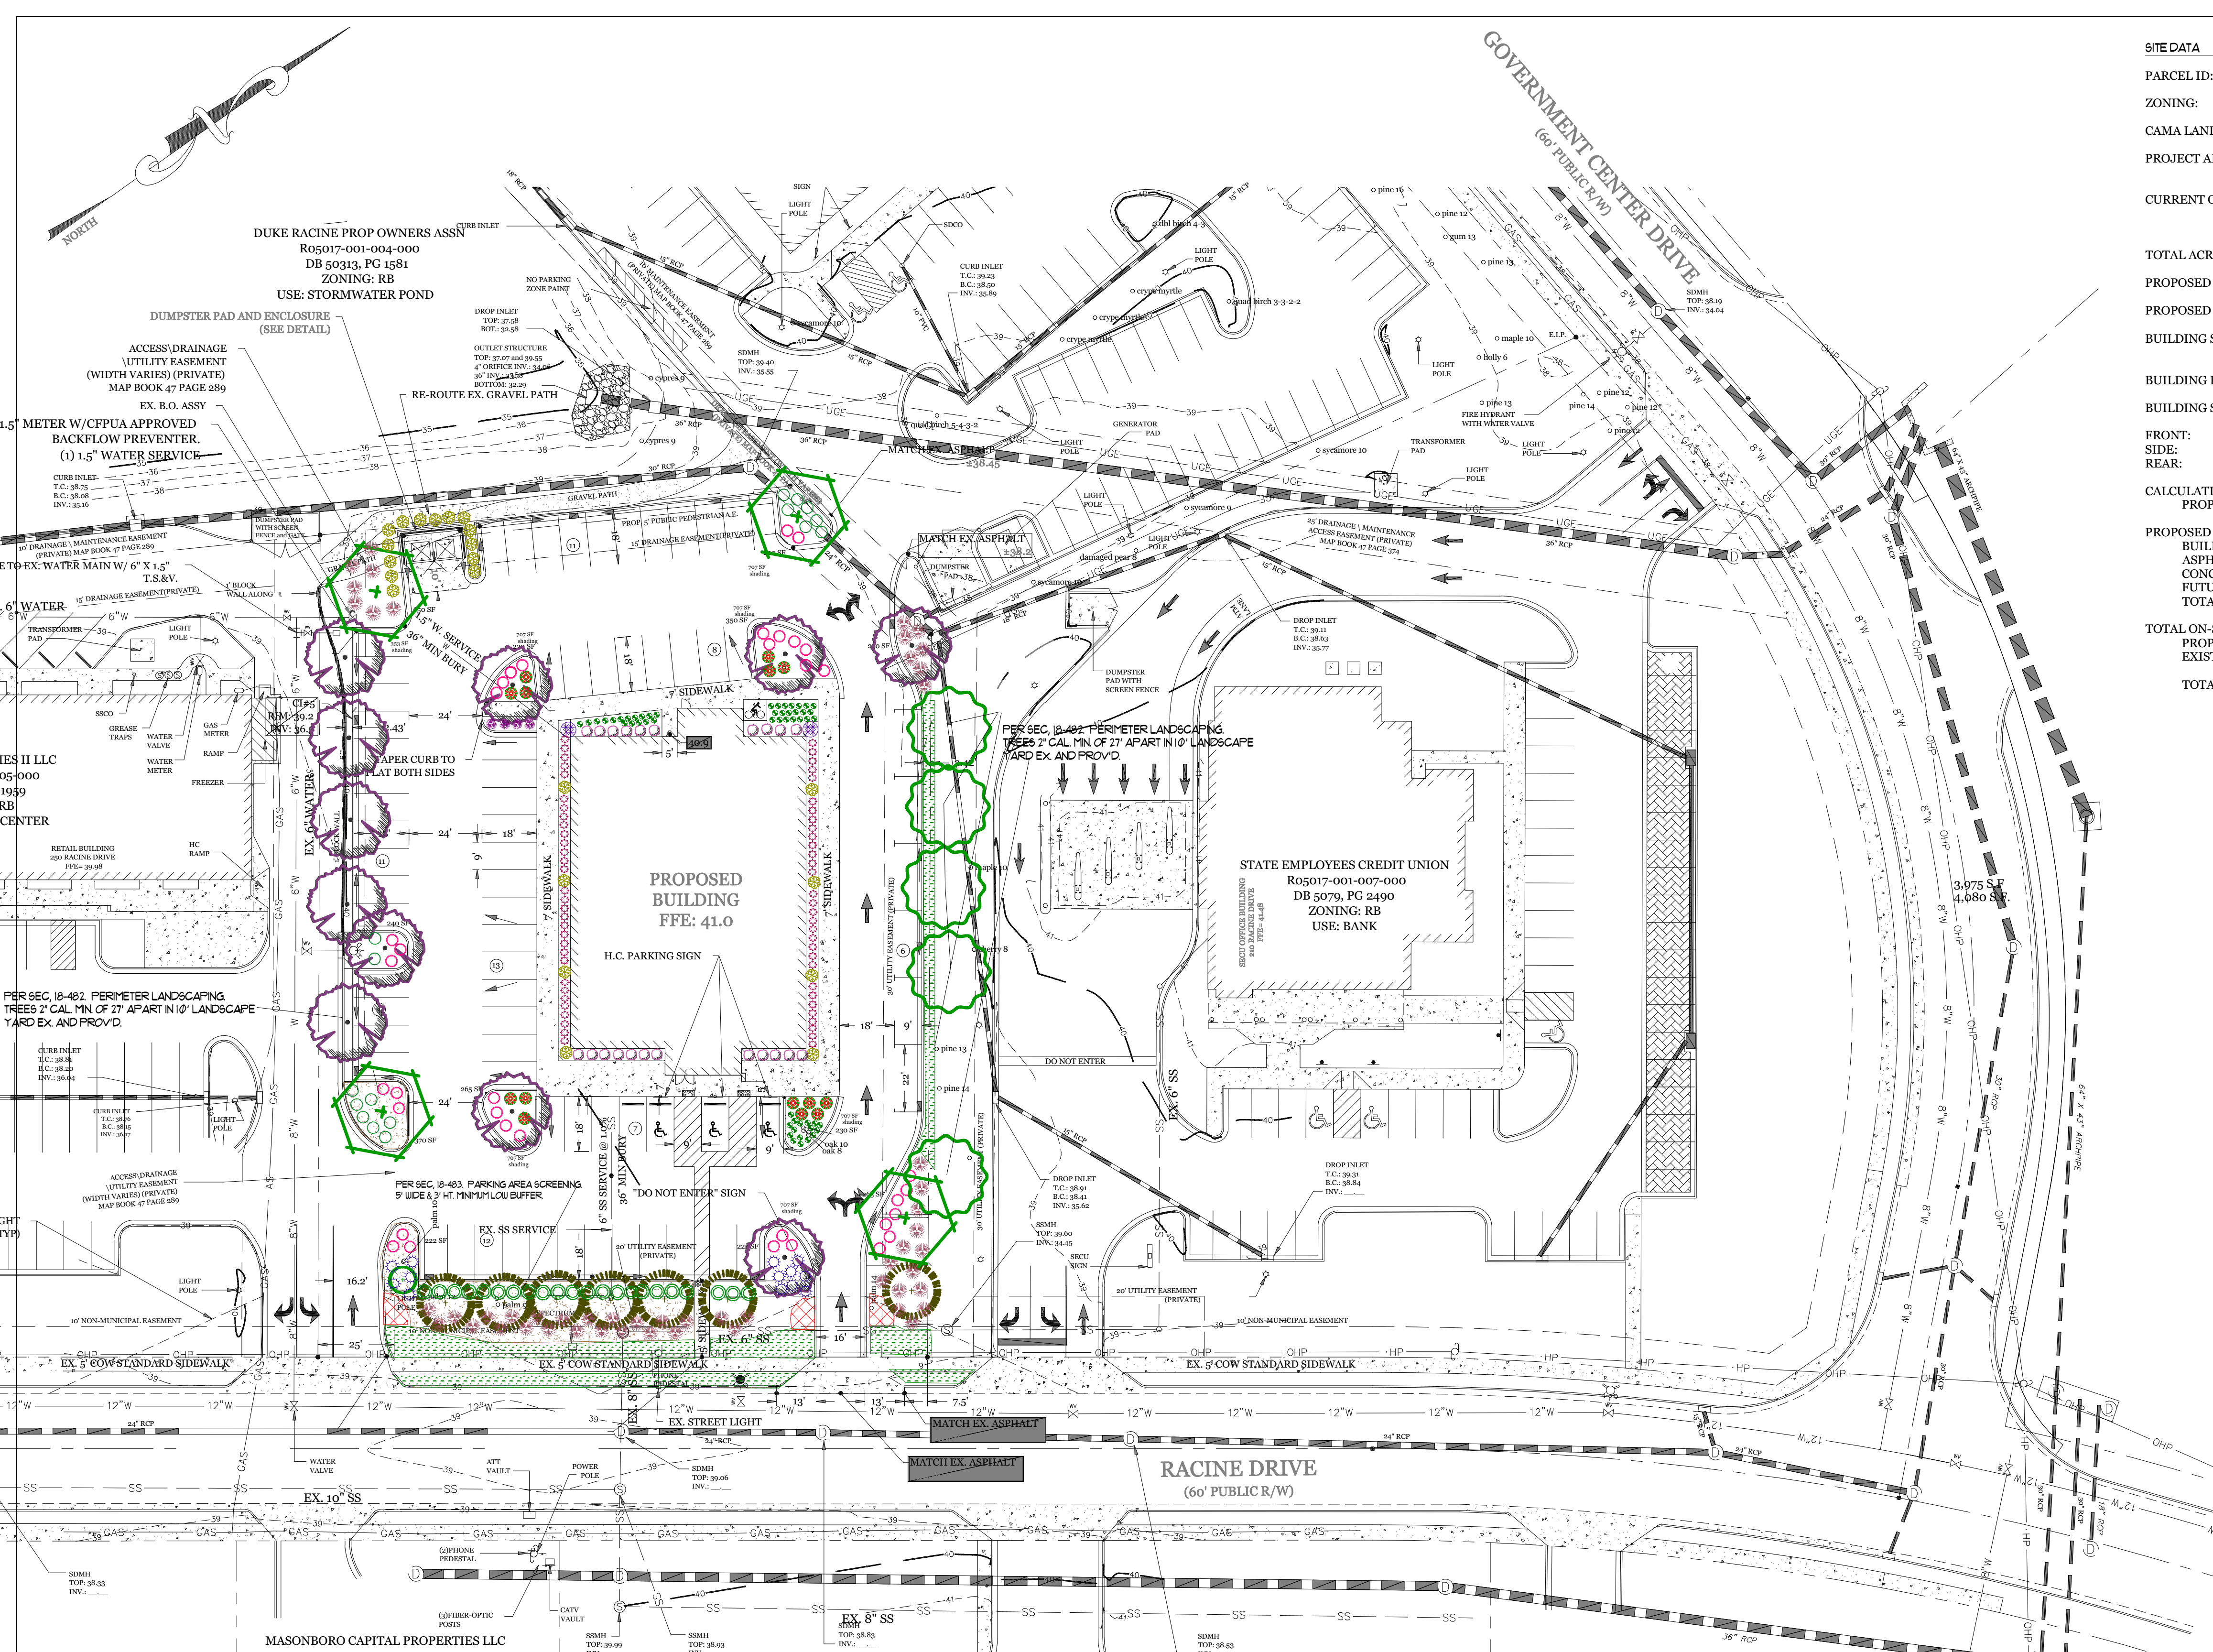

SITE DATA

PARCEL ID: R05017-001-006-000
 ZONING: RB-REGIONAL BUSINESS
 CAMA LAND USE CLASSIFICATION: URBAN
 PROJECT ADDRESS: 240 RACINE DR. WILMINGTON, NC 28403
 CURRENT OWNERS: MATT PROPERTIES III LLC 3356 GRANVILLE DR RALEIGH, NC 27609

TOTAL ACREAGE IN PROJECT BOUNDARY: 54,893 S.F. (1.26 AC.) x 15 = 19 trees 2' cal. req'd. & prov'd. OFFICE BUILDING

PROPOSED USE: II-B (COMMERCIAL)

BUILDING SIZE: 16,000 SF GFA (8,000 S.F./FLOOR) 8,340 S.F. ROOF

BUILDING HEIGHT: ±32' / 2 STORY (35' MAX PER ZONING)

BUILDING SETBACKS:
 FRONT: REQUIRED= 25' PROPOSED= 92.5'
 SIDE: REQUIRED= 0' PROPOSED= 82.6'/40.9'
 REAR: REQUIRED= 15' PROPOSED= 68.7'

CALCULATION FOR BUILDING COVERAGE: PROPOSED COVERAGE: 8,340 S.F. ÷ 54,893 S.F. = 15.2%

PROPOSED ON-SITE IMPERVIOUS AREAS:
 BUILDING: 8,340 S.F.
 ASPHALT: 27,345 S.F.
 CONCRETE SIDEWALK, C&G, ETC.: 6,390 S.F.
 FUTURE: 4,687 S.F.
 TOTAL: 46,762 S.F. (85.2%)

TOTAL ON-SITE IMPERVIOUS AREA:
 PROPOSED IMPERVIOUS AREA: 46,762 S.F.
 EXISTING ON-SITE IMPERVIOUS AREA: 2,635 S.F.
 TOTAL: 49,397 S.F. (90.0%)

PROPOSED OFF-SITE IMPERVIOUS AREAS:
 CONCRETE DRIVE APRONS: 360 S.F.

PARKING REQUIRED (16,000 S.F. PROFESSIONAL OFFICE):
 MIN: 1 PER 300 S.F. G.F.A.: 53 SPACES (3 H.C.)
 MAX: 1 PER 200 S.F. G.F.A.: 80 SPACES

PARKING PROVIDED= 72 SPACES (3 H.C.)

BICYCLE PARKING REQUIRED: (MIN. 5 PER 25-125 VEHICLE SPACES) REQUIRED: 5 SPACES PROVIDED: 5 SPACES

STREETYARD (RACINE DR. (MULTIPLIER: 25' MAX: 37.5' MIN: 12.5')) REQUIRED: 200'-41'=159' X 25' = PROVIDED:

FOUNDATION PLANTINGS:
 FRONT FACE REQUIRED: 297 SF (2,475 SF X 12%)
 PROVIDED: 297 SF
 LEFT FACE REQUIRED: 393 SF (3,275 SF X 12%)
 PROVIDED: 403 SF
 REAR FACE REQUIRED: 297 SF (2,475 SF X 12%)
 PROVIDED: 443 SF
 RIGHT FACE REQUIRED: 393 SF (3,275 SF X 12%)
 PROVIDED: 401 SF

EXISTING SEWER AND WATER DEMAND= 0 GPD

PROPOSED SEWER AND WATER DEMAND:
 FIXTURES @ 25 GAL/EMPLOYEE/SHIFT = 1,250 GPD

ESTIMATED TRIP GENERATION: (Per Trip Generation Manual, 10th Edition: 16,000 SF OFFICE (ITE CODE 710))
 AM PEAK: 24 PM PEAK: 18 DAILY: 132

LANDSCAPE NOTES:
 1. PRIOR TO ANY CLEARING, GRADING OR CONSTRUCTION ACTIVITY, TREE PROTECTION FENCING WILL BE INSTALLED AROUND PROTECTED TREES OR GROVES OF TREES. NO CONSTRUCTION WORKERS, TOOLS, MATERIALS OR VEHICLES ARE PERMITTED WITHIN THE TREE PROTECTION FENCING.
 2. THE AREAS WITHIN THE TRIANGULAR SIGHT DISTANCE SHALL BE MAINTAINED FREE OF ALL OBSTRUCTIONS BETWEEN 30' AND 10'.
 3. A RAIN/FREEZE SENSOR SHALL BE USED IF THERE IS AN IRRIGATION SENSOR.
 4. ALL PLANT BEDS ARE TO RECEIVE 3-4" OF PINESTRAW OR MULCH.
 5. LANDSCAPING SHALL BE COMPLETE BEFORE ISSUANCE OF A CO.

SHADING REQUIREMENTS:
 27,345 SF X 2.0 = 54,690 SF OF INTERIOR SHADING REQ'D.
 10 TREES X 353 SF = 3,530 SF SHADING
 6 TREES X 707 SF = 4,242 SF SHADING
 TOTAL SHADING: 7,772 SF

LEGEND

COMMON NAME	QTY	SIZE	HEIGHT	QTY REQ'D
FLOWER, PERENNIAL				
LIRIOPE, BIG BLUE	52	1 GAL	N/A	0
SHRUB				
BOXWOOD, WINTERGREEN	62	3 GAL	12"	62
EVERED LOROPETALUM	14	3 GAL	12"	0
CAMELLIA SASANQUA YULETIDE	2	7 GAL	12"	2
TREE				
LIGUSTRUM RECURVE	23	7 GAL	3'	23
MISCANTHUS ADAGIO	52	3 GAL	12"	52
HOLLY, SKY PENCIL	0	7 GAL	3'	0
HOLLY, YAUFON, DWARF	26	3 GAL	N/A	0
DRIFT ROSE	37	3 GAL	N/A	0
BREEZE GRASS	13	3 GAL	N/A	0
YEW, PRINGLES	22	3 GAL	12"	22
YEW, UPRIGHT JAPANESE	23	7 GAL	3'	23
YUCCA, COLORGUARD	4	3 GAL	N/A	0
TRIDENT MAPLE	11	2" CAL.		11
ALLEE ELM	4	2" CAL.		4
EAGLESTON HOLLY, TREE FORM	1		8'	1
BALD CYPRESS	7	2" CAL.		7
SHUMARD OAK	4	2" CAL.		4


LOW BUFFER

CANOPY
CANOPY
UNDERSTORY
CANOPY

APPROVED CONSTRUCTION PLAN
 DATED: 3.11.21
 PROJECT #: 2020054
 STORMWATER PERMIT #: 2021012

CLIENT INFORMATION:
 AMANDA CHAPPEL
 MATT PROPERTIES III, LLC
 1908 EASTWOOD ROAD, SUITE 222
 WILMINGTON, NC 28403

Revision #: 1
 Date: 2/3/2021

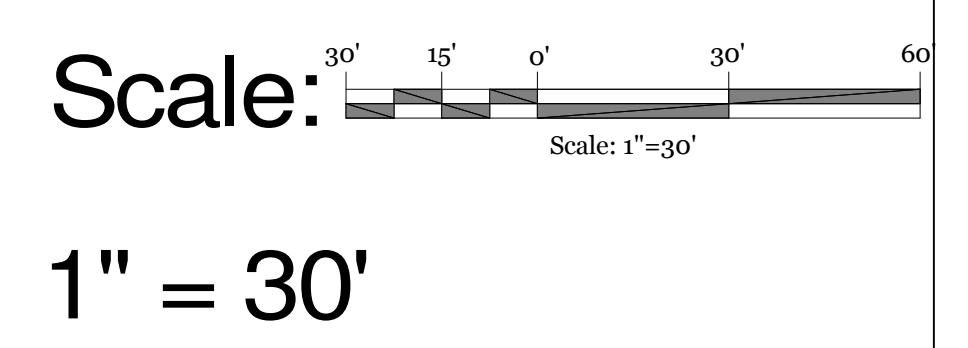


Landscape Plan:
 240 Racine Dr. Office Bldg.

Landscape Design by: Jim Freeman - NCLC# 0071
 Freeman Landscape, Inc.



Outdoor Lighting
Shoobox LED

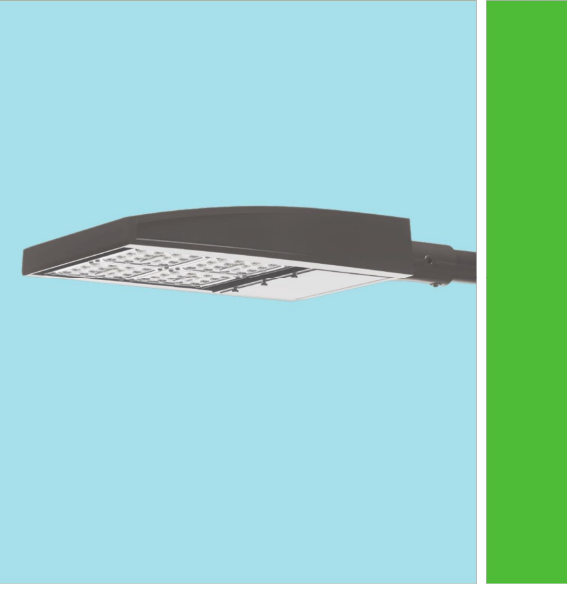

The energy-efficient Shoobox LED combines a decorative, contemporary style with versatility and ample lighting effect that is perfect for streets, parking lots, commercial buildings and residential communities. The Shoobox LED provides excellent color rendition along with a controlled light pattern that reduces glare and keeps the light directed only where you want it. Available in black, dark bronze, gray or white with one to four fixtures per pole.

LED (Light Emitting Diode)	150, 220, 420, 530 watts
Mounting heights	25', 30', 35'
Colors	Black Bronze Gray White
Poles	Fiberglass (1 or 2 fixtures per pole) Decorative tapered metal Decorative square metal

Note: 35' pole available in black or bronze only.

For additional information, visit us at duke-energy.com/OutdoorLighting or call us toll free at 866.769.6417.



Outdoor Lighting
Shoobox LED

Light source: LED (white)
Replacement for: LED Wattage 150 - 250-watt HPS and metal halide; LED Wattage 205 - up to 400-watt metal halide; LED Wattage 530 - 1,000-watt metal halide

Warm-up and restrike time: Instant on (no warm-up or restrike time)

Wattage	BUG Rating	Light Pattern	Lumens	Color Temp
LED 150	B5-U0-G3	IESNA Type V (circular)	19580	4,000K
LED 150	B3-U0-G4	IESNA Type IV (forward throw)	18459	
LED 150	B2-U0-G3	IESNA Type III (oval)	19006	
LED 220	B5-U0-G3	IESNA Type V (circular)	25870	
LED 220	B3-U0-G4	IESNA Type IV (forward throw)	24390	
LED 220	B2-U0-G4	IESNA Type III (oval)	25114	
LED 420	B5-U0-G5	IESNA Type V (circular)	48514	
LED 420	B3-U0-G5	IESNA Type IV (forward throw)	43765	
LED 530	B5-U0-G5	IESNA Type V (circular)	60296	
LED 530	B3-U0-G5	IESNA Type IV (forward throw)	54395	


* These are approximate replacement suggestions; actual conditions could be different.

Poles available:	Mounting height	Color
Round tapered decorative metal*	35'	Black Bronze
Decorative square metal*	25' and 30'	Black Bronze Gray White
Fiberglass	30'	Black (1 or 2 fixtures per pole) Gray (1 or 2 fixtures per pole)

Features	Benefits
Little or no installation cost	Frees up capital for other projects
Design services by lighting professionals included	Meets industry standards and lighting ordinances
Maintenance included	Eliminates high and unexpected repair bills
Electricity included	Less expensive than metered service
Warranty included	Worry-free
One low monthly cost on your electric bill	Convenience and savings for you
Turnkey operation	Provides hassle-free installation and service
Backed by over 40 years of experience	A name you can trust today ... and tomorrow

*2" raised foundation available when required on metal poles only.

©2019 Duke Energy Corporation 193519 12/19

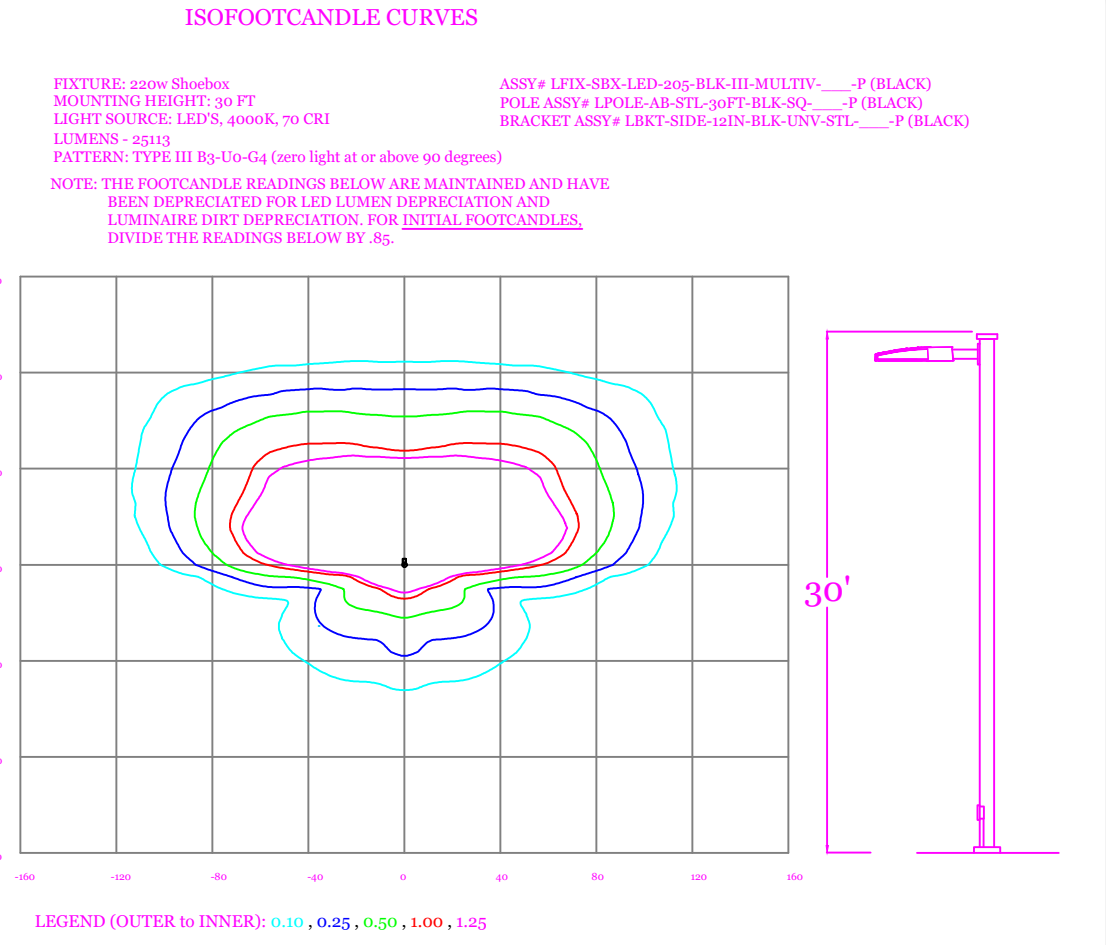

Statistics

Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Grid	+	0.7 fc	5.7 fc	0.0 fc	N/A	N/A
Parking	X	2.5 fc	5.7 fc	0.5 fc	11.4:1	5.0:1

Schedule


Symbol	Label	QTY	Description	Number Lamps	Lumens per Lamp	LLF
Blue circle with cross	220w SB III	6	LED 220w Shoobox - Type III - 4000K	64	392	0.85

APPROVED CONSTRUCTION PLAN
DATED: 3/11/21
PROJECT #: 2020054
STORMWATER PERMIT #: 2021012

LIGHTING DESIGN TOLERANCE

The calculated footcandle light levels in this lighting design are predicted values and are based on specific information that has been supplied to Duke Energy Progress. Any inaccuracies in the supplied information, differences in luminaire installation, lighted area geometry including elevation differences, reflective properties of surrounding surfaces, obstructions (foliage or otherwise) in the lighted area, or lighting from sources other than listed in this design may produce different results from the predicted values. Normal tolerances of voltage, lamp output, and ballast and luminaire manufacture will also affect results.

Customer approval _____ Date _____



PROPRIETARY & CONFIDENTIAL
This document together with the concepts and designs presented herein, presented as an instrument of service, is the sole property of Duke Energy Progress, and is intended only for the specific purpose and prospective client as stated in the title block of this drawing. Any use, copying, reproduction or disclosure of the drawing, design or any information contained herein by the prospective customer or other entities, including without limitation, architects, engineers, or equipment manufacturers is hereby expressly prohibited and shall not be permitted absent prior written consent from, and payment of compensation to Duke Energy Progress. Duke Energy Progress disclaims any liability or responsibility for any unauthorized use of or reliance on this document.

240 RACINE DRIVE Wilmington, NC	
SITE LIGHTING PLAN	
Designed by	DEP LIGHTING SOLUTIONS
Reviewed by	N. Johnson Scale 1" = 20'
Date	11/24/2020 Size "Arch D"
Description	LED 220w Shoobox
Drawing No.	20-0400A Sht. 1 OF 1