


REVISIONS

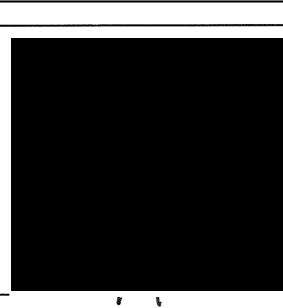


CLIENT INFORMATION:

CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662

DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	1" = 40'
PROJECT NUMBER:		2021-024	

C-O

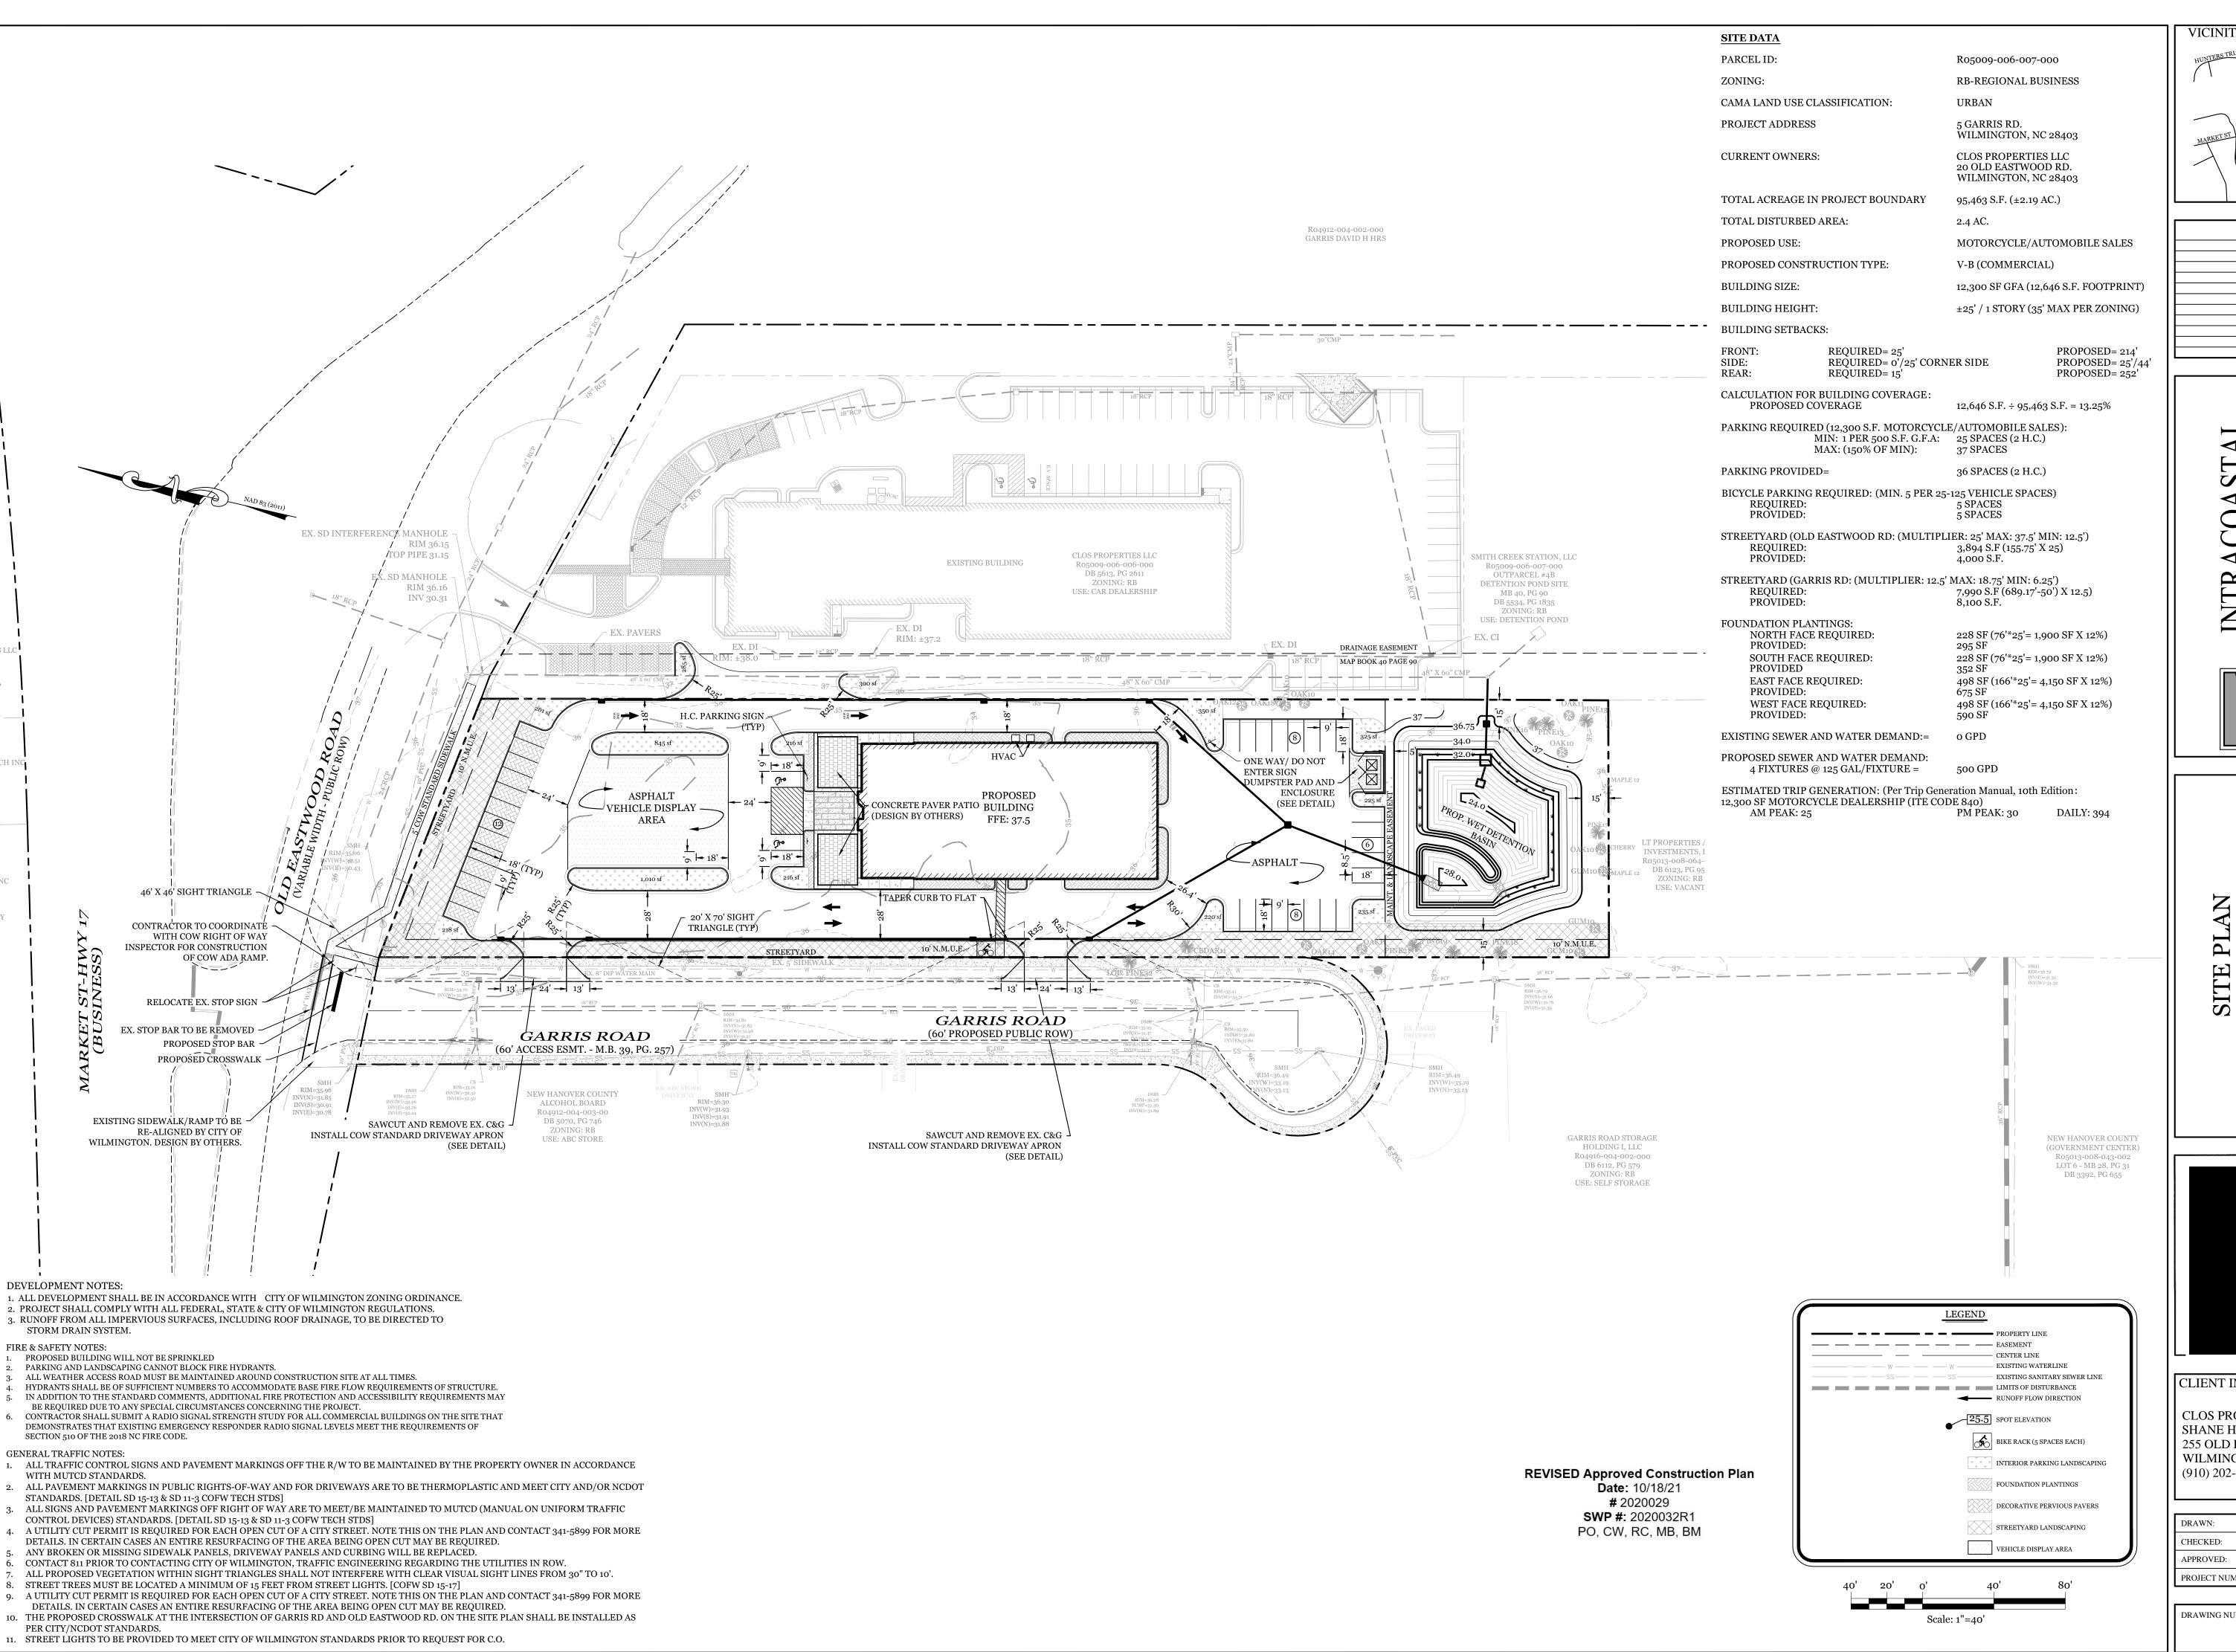



VICINITY MAP (NOT TO SCALE):

REVISIONS

4

ĬΤΪ



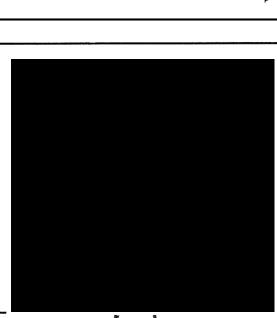



CLIENT INFORMATION:


CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662

DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	1" = 40'
PROJECT NUMBER:		2021-024	

DRAWING NUMBER:



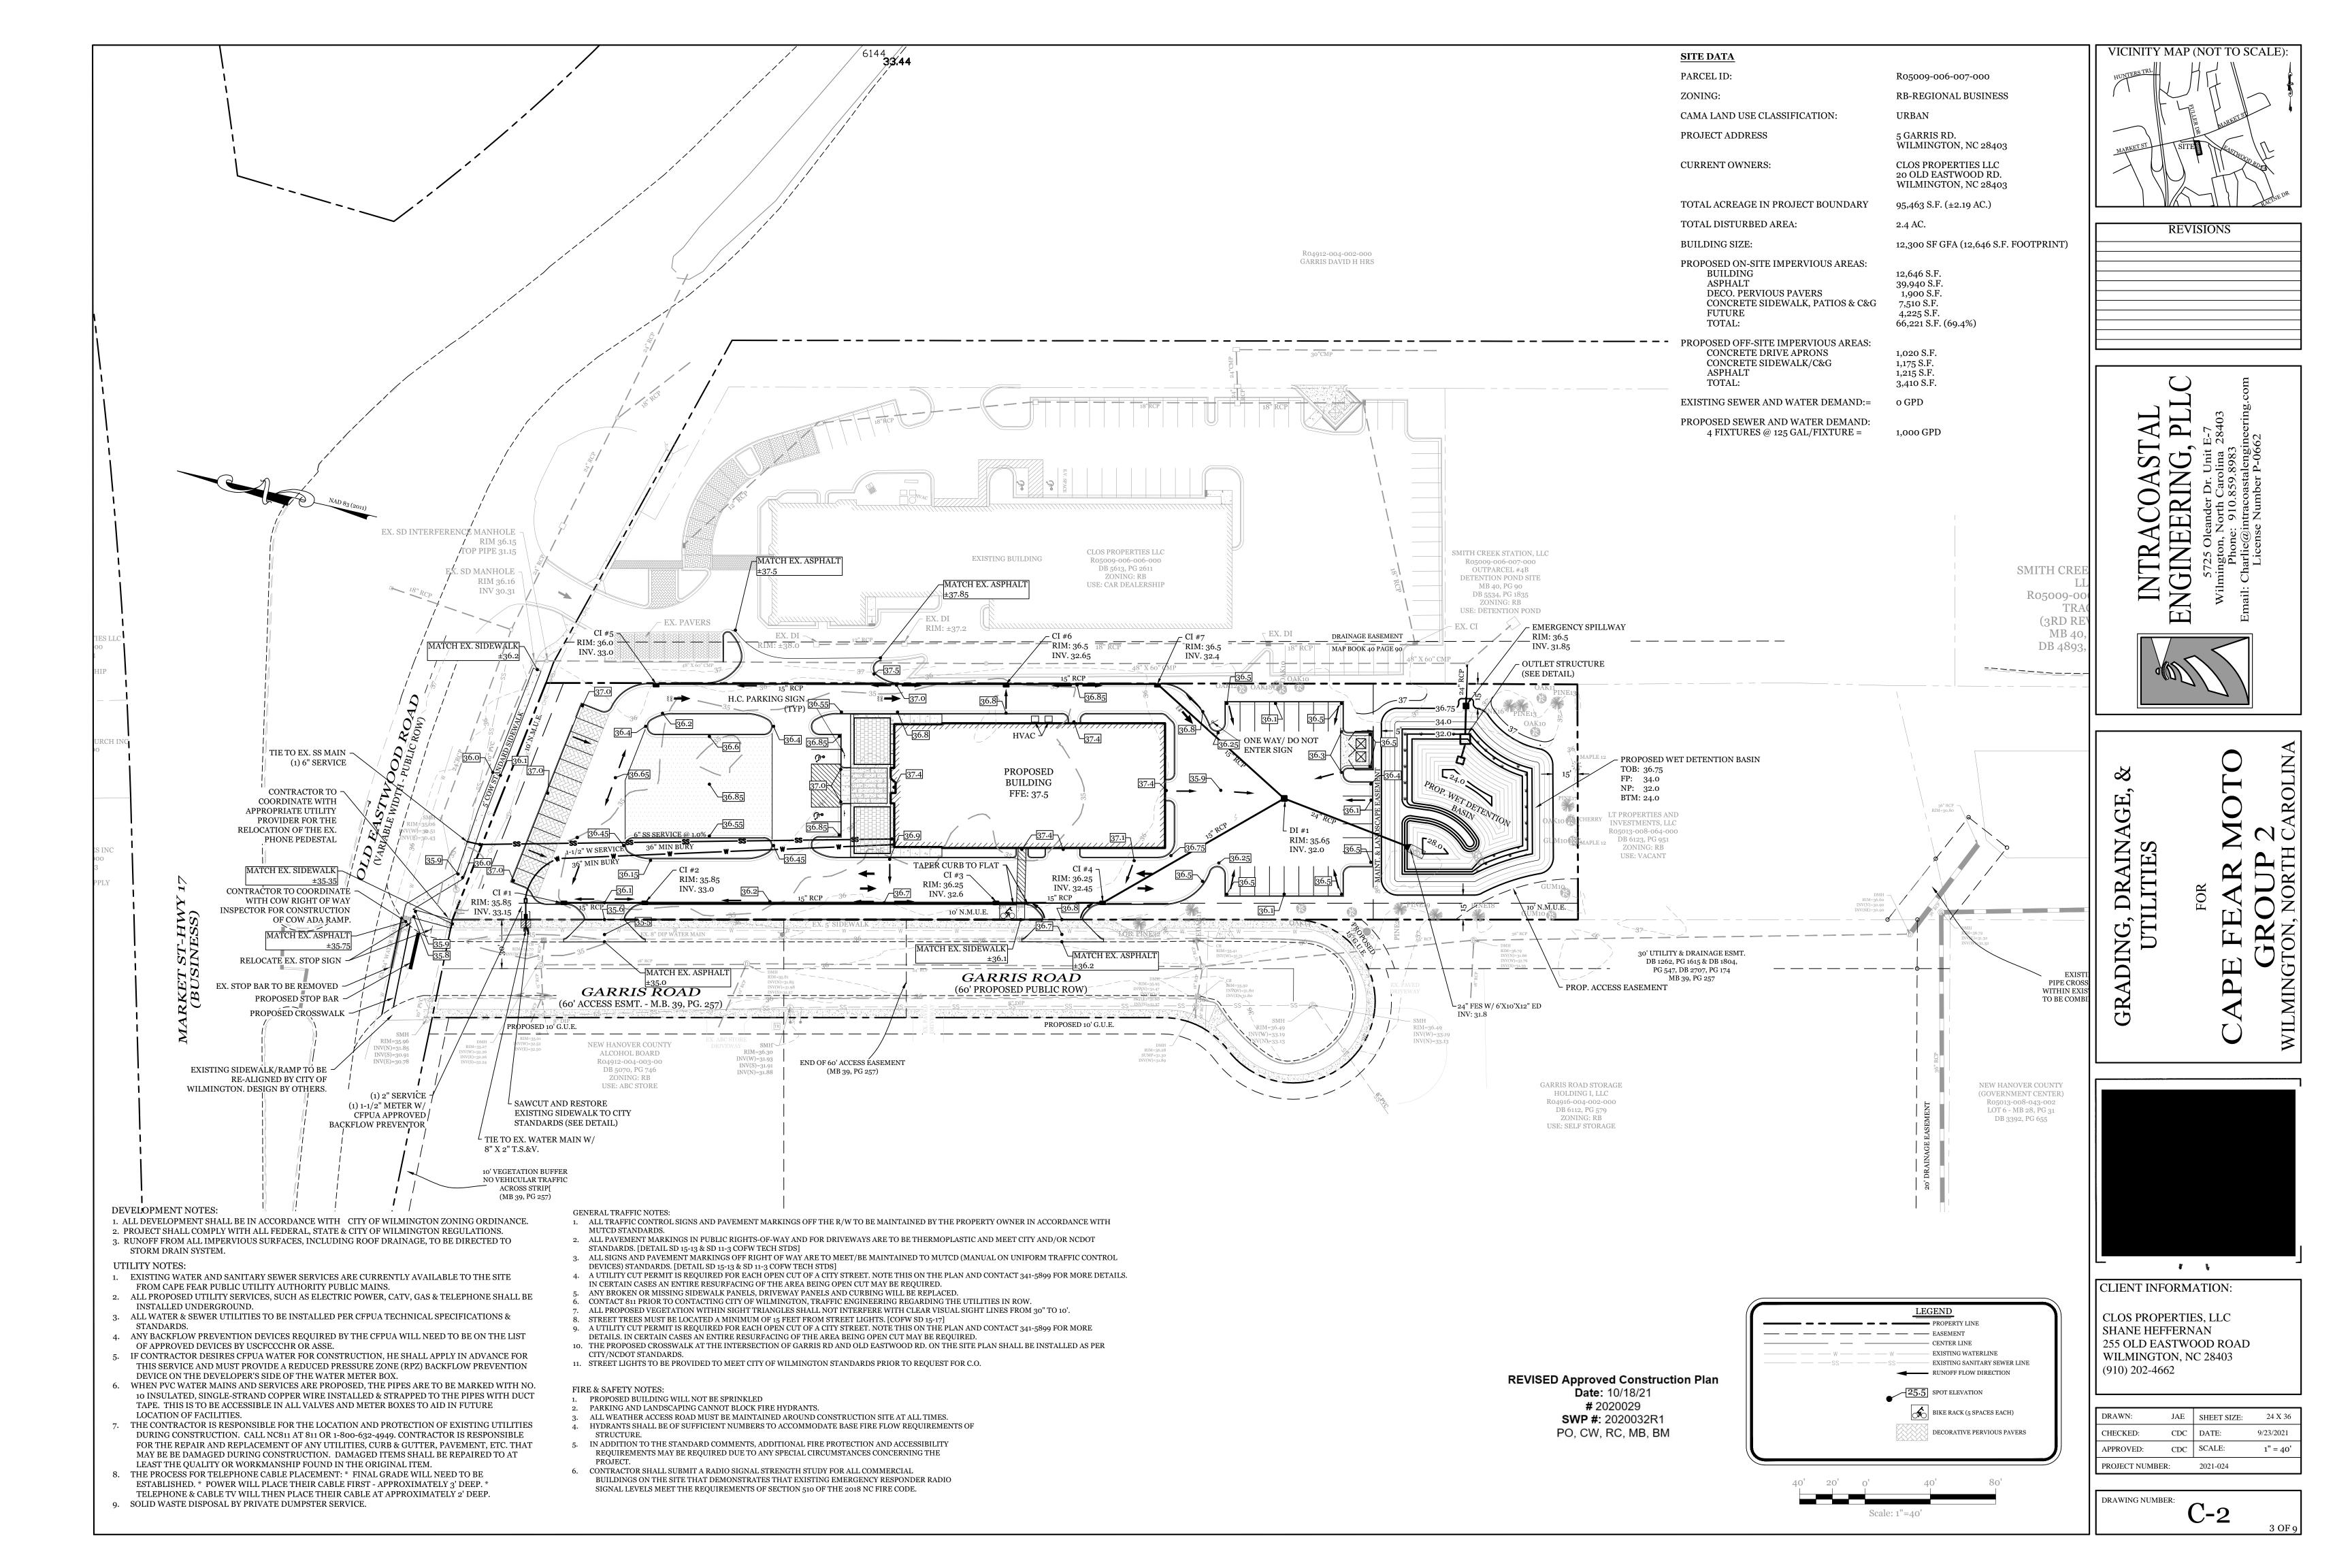

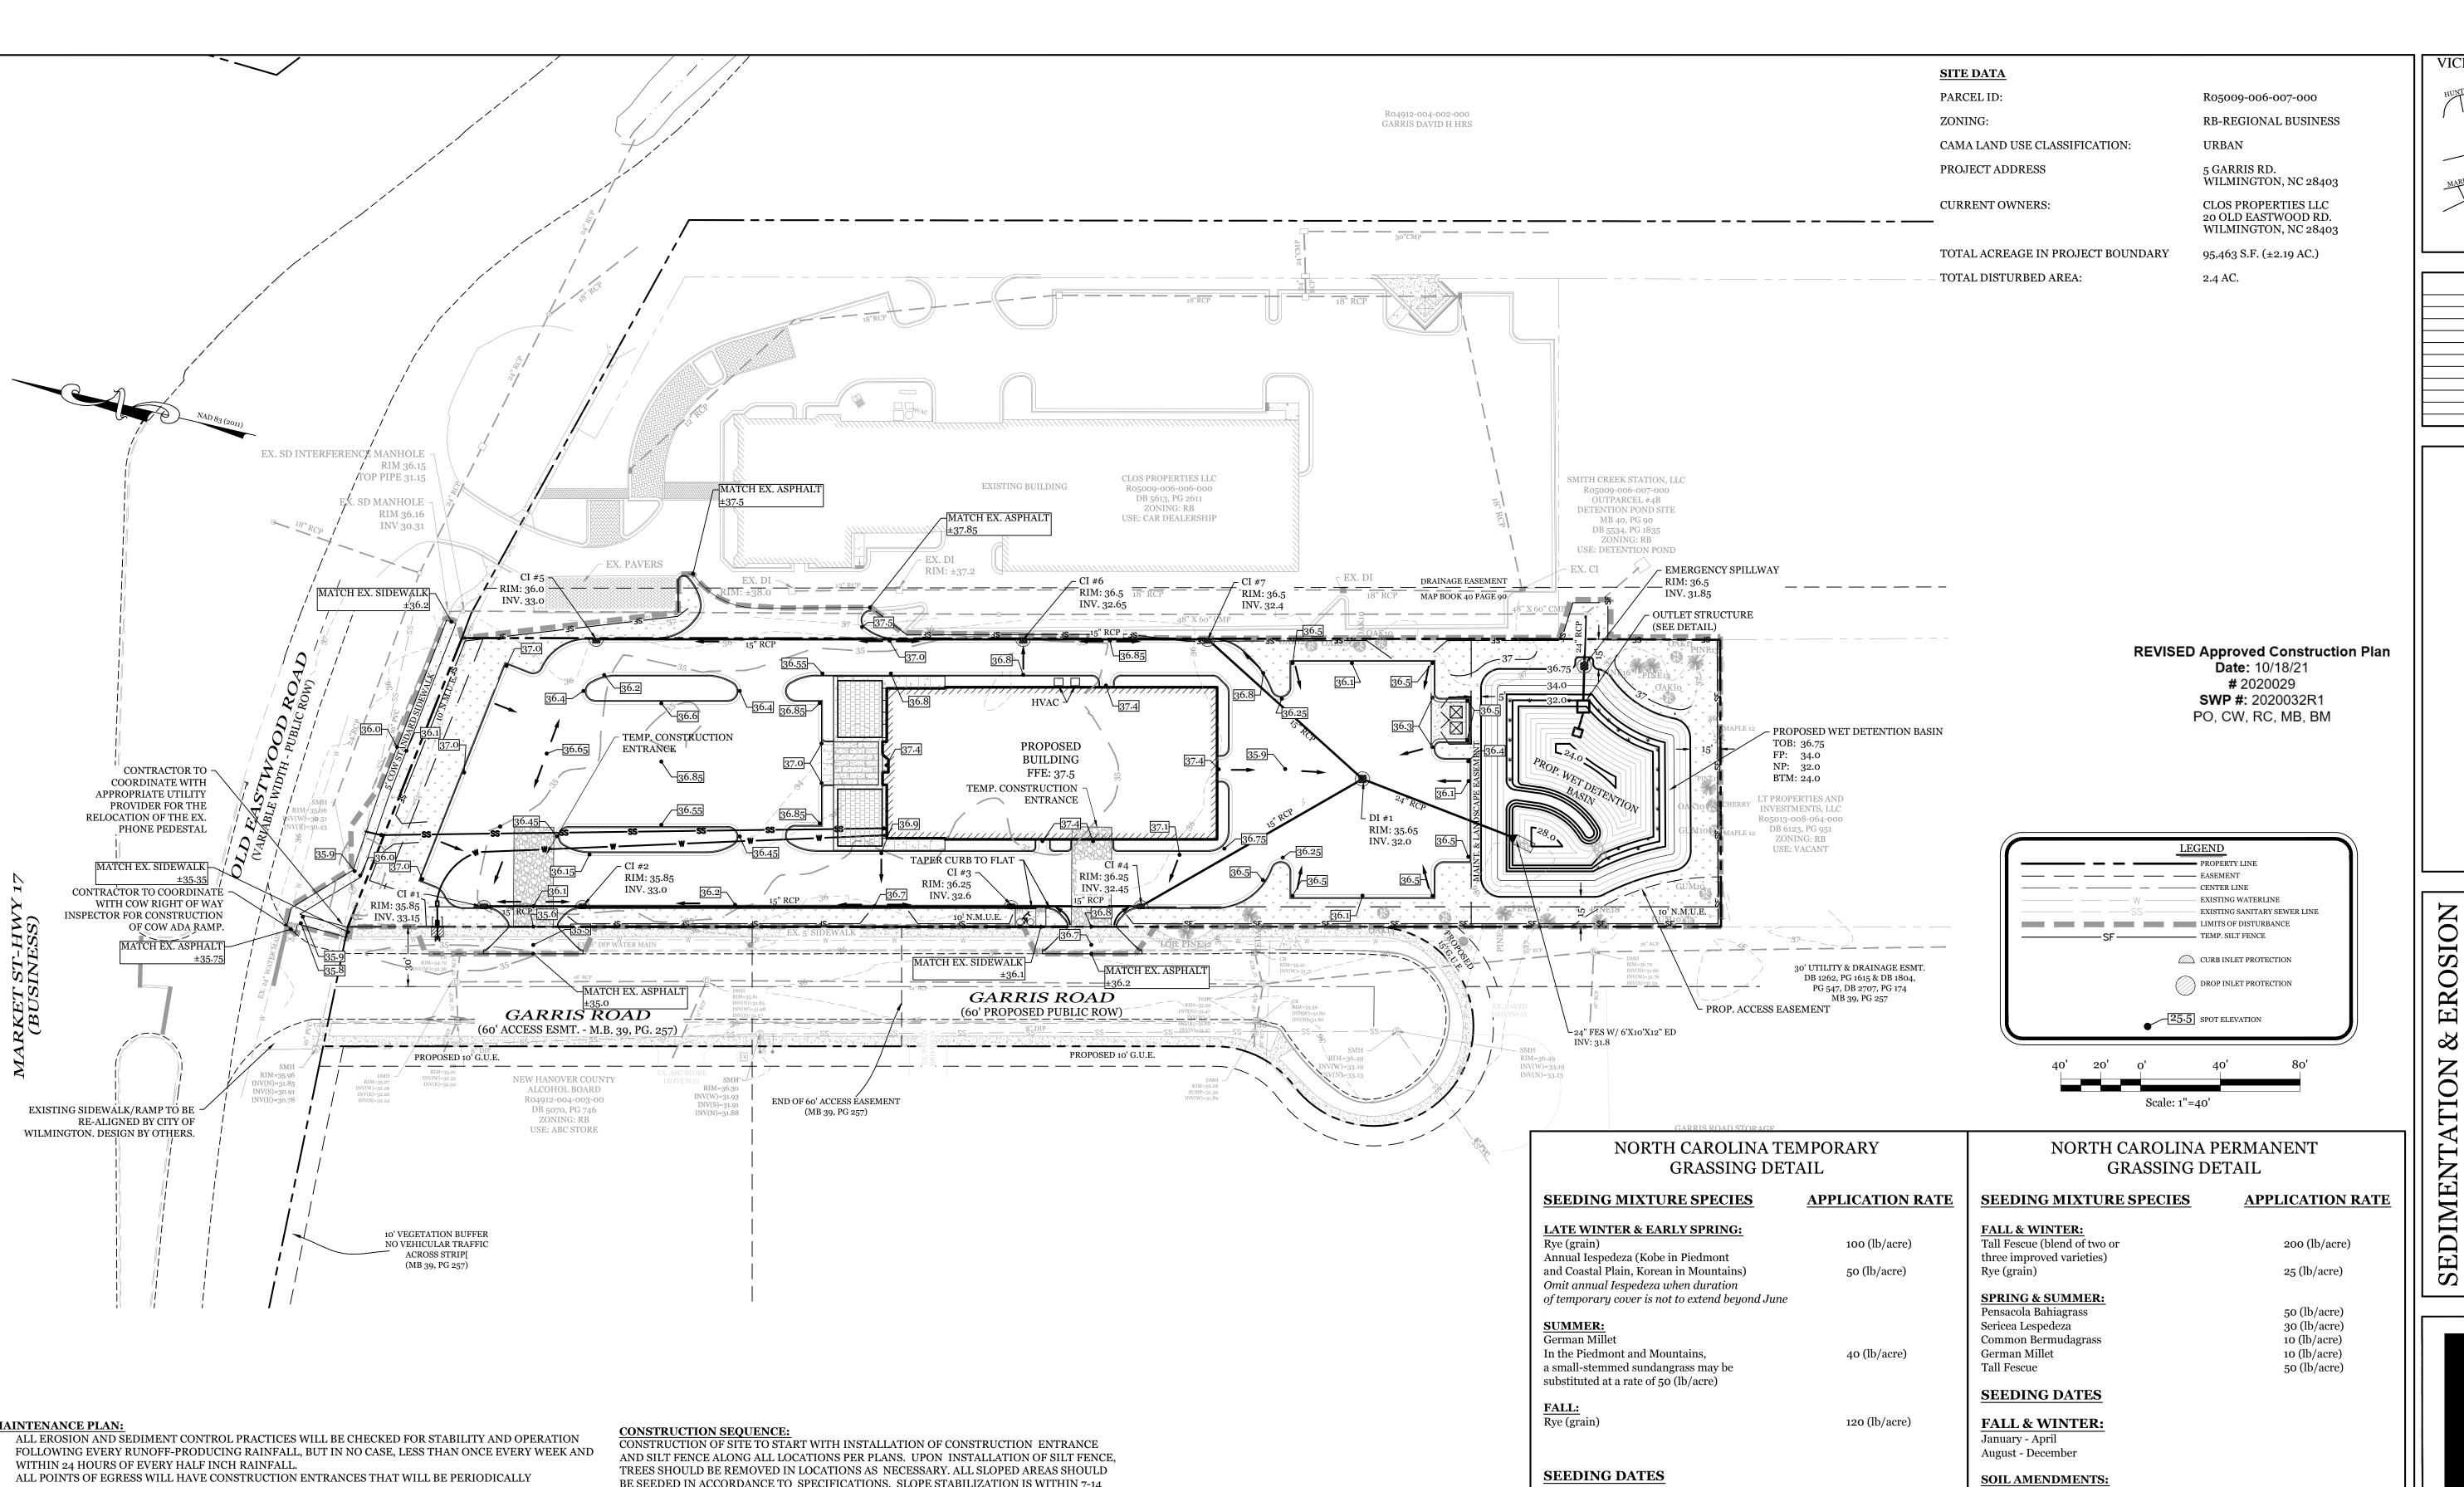

MAINTENANCE PLAN:

- TOP-DRESSED WITH AN ADDITIONAL 2 INCHES OF 2-3 INCH STONE TO MAINTAIN PROPER DEPTH. THEY WILL BE MAINTAINED IN A CONDITION TO PREVENT MUD OR SEDIMENT FROM LEAVING THE SITE. IMMEDIATELY REMOVE OBJECTIONABLE MATERIAL SPILLED, WASHED OR TRACKED ONTO THE CONSTRUCTION ENTRANCE OR ROADWAYS.
- SEDIMENT WILL BE REMOVED FROM HARDWARE CLOTH AND GRAVEL INLET PROTECTION, ROCK DOUGHNUT INLET PROTECTION, SEDIMENT TRAP BAFFLES, AND ROCK PIPE INLET PROTECTION WHEN THE DESIGNED STORAGE CAPACITY HAS BEEN HALF FILLED WITH SEDIMENT. ROCK WILL BE CLEANED OR REPLACED WHEN THE SEDIMENT POOL NO LONGER DRAINS AS DESIGNED. DEBRIS WILL BE REMOVED FROM THE ROCK AND HARDWARE CLOTH TO ALLOW PROPER DRAINAGE. SILT SACKS WILL BE EMPTIED ONCE A WEEK AND AFTER EVERY RAIN EVENT. SEDIMENT WILL BE REMOVED FROM AROUND BEAVER DAMS, DANDY SACKS AND SOCKS ONCE A WEEK AND AFTER EVERY RAIN EVENT.
- CHECK SEDIMENT BASIN AND BAFFLES WEEKLY & AFTER EACH RAINFALL EVENT. REMOVE SEDIMENT FROM TRAP & BAFFLES AND RESTORE TO ORIGINAL VOLUME WHEN SEDIMENT ACCUMULATES TO ABOUT ½ THE DESIGN VOLUME. REPAIR / REPLACE BAFFLES IF TORN, COLLAPSED, OR INEFFECTIVE.
- DIVERSION DITCHES WILL BE CLEANED OUT IMMEDIATELY TO REMOVE SEDIMENT OR OBSTRUCTIONS FROM THE FLOW AREA. THE DIVERSION RIDGES WILL ALSO BE REPAIRED. SWALES MUST BE TEMPORARILY STABILIZED WITHIN 21 CALENDAR DAYS OF CEASE OF ANY PHASE OF ACTIVITY ASSOCIATED
- SEDIMENT WILL BE REMOVED FROM BEHIND THE SEDIMENT FENCE WHEN IT BECOMES HALF FILLED. THE SEDIMENT FENCE WILL BE REPAIRED AS NECESSARY TO MAINTAIN A BARRIER. STAKES MUST BE STEEL. STAKE SPACING WILL BE 6 FEET MAX. WITH THE USE OF EXTRA STRENGTH FABRIC, WITHOUT WIRE BACKING. STAKE SPACING WILL BE 8 FEET MAX WHEN STANDARD STRENGTH FABRIC AND WIRE BACKING ARE USED. IF ROCK FILTERS ARE DESIGNED AT LOW POINTS IN THE IN THE SEDIMENT FENCE THE ROCK WILL BE REPAIRED OR REPLACED IF IT BECOMES HALF FULL OF SEDIMENT, NO LONGER DRAINS AS DESIGNED OR IS DAMAGED.
- FAIRCLOTH SKIMMER TO BE ROUTINELY CHECKED FOR SEDIMENT ACCUMULATION, TRASH, AND DEBRIS CLOGGING THE WATER ENTRY ORIFICES. PULL SKIMMER TO SIDE OF BASIN AND HAND REMOVE SEDIMENT AND DEBRIS TO RESTORE FLOW TO ORIGINAL STATE.

BE SEEDED IN ACCORDANCE TO SPECIFICATIONS. SLOPE STABILIZATION IS WITHIN 7-14 CALENDAR DAYS OF ANY PHASE OF CONSTRUCTION. ALL OTHER AREAS MUST BE STABILIZED WITH IN 15 WORKING DAYS. CONTRACTOR TO FOLLOW NPDES STABILIZATION REQUIREMENTS PER TABLE ON THIS SHEET AS WELL. MOST STRINGENT REQUIREMENT TO

- 1. GENERAL CLEARING AND GRADING OF THIS SITE WILL NOT BE DONE UNTIL THE TEMPORARY SILT FENCE & CONSTRUCTION ENTRANCE HAS BEEN INSTALLED. 2. NO CUT SLOPE OR FILL SLOPE SHALL EXCEED A RISE OR FALL OF ONE FOOT FOR
- 3. NO SEDIMENT WILL BE ALLOWED TO EXIT THE SITE. ALL EROSION SHALL BE CONTROLLED INCLUDING SIDE SLOPES DURING AND AFTER CONSTRUCTION

EVERY RUN OF 3 FEET (1 VERTICAL TO 3 HORIZONTAL).

- INSTALL PRIMARY EROSION CONTROL MEASURES BEFORE BEGINNING CONSTRU INCLUDING BUT NOT LIMITED TO GRAVELED CONSTRUCTION ENTRANCE, SILT F TREE PROTECTION FENCE & SEDIMENT BASINS. INSTALL ALL SECONDARY EROSI CONTROL MEASURES, SUCH AS INLET PROTECTION AS SOON AS POSSIBLE AFTER
- ALL EROSION CONTROL MEASURES TO BE INSPECTED AFTER EACH RAIN. SILT FEI AND INLET PROTECTION TO BE CLEANED WHEN HALF FULL A 4" LAYER OF TOPSOIL SHALL BE APPLIED TO ALL NEW AREAS TO BE GRASSED.
- MAINTAIN ALL EROSION CONTROL MEASURES UNTIL PROJECT IS COMPLETE. MORE STRINGENT MEASURES MAY BE REQUIRED TO HALT EROSION IF THOSE ON PLAN PROVE TO BE LESS EFFECTIVE.
- REMOVE ALL TEMPORARY EROSION CONTROL MEASURES UPON COMPLETION OF CONSTRUCTION. ALL PERMANENT MEASURES SHALL BE WELL ESTABLISHED PRI PROJECT COMPLETION.

JCTION FENCE,	SYMBOL	GROUND STABILIZATION CRITERIA			
ION R	SITE AREA DESCRIPTION	STABILIZATION TIMEFRAME	STABILIZATION TIMEFRAME EXCEPTIONS		
ENCE		* Perimeter dikes, swales, ditches and slopes	7 Days	None	
		* High Quality Water (HQW) Zones	7 Days	None	
N THIS F LIOR TO		* Slopes Steeper than 3:1	7 Days	If slopes are 10' or less in length and are not steeper than 2:1, 14 days are allowed	
	\(\frac{1}{2} \frac{1}{2} \frac{1}{2} \frac{1}{2} \frac{1}{2} \fra	* Slopes 3:1 or flatter	14 Days	7-days for slopes greater than 50 ft. in length	
	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	* All other areas with slopes flatter than 4:1	14 Days	None (except for perimeters & HQW Zones)	
	·	·	·	·	

LATE WINTER & EARLY SPRING: Mountains - Above 2500 ft: Feb. 15-May 15 Piedmont - Jan. 1-May 1 Coastal Plain - Dec. 1-Apr. 15

Mountains - May 15-Aug. 15 Piedmont - May 1-Aug. 15 Coastal Plain - Apr. 15-Aug. 15

Mountains - Aug. 15-Dec. 15 Coastal Plain and Piedmont - Aug. 15-Dec. 30

SOIL AMENDMENTS: Follow recommendations of soil tests or apply 2,000 lb/acre ground agricultural

limestone and 750 lb/acre 10-10-10 fertilizer.

apply 4,000 lb/acre straw. anchor straw by tacking with asphalt, netting, or a mulch anchoring tool. A disk with blades set nearly straight can be used as a mulci anchoring tool.

Refertilize if growth is not fully adequate. reseed, refertilize and mulch immediatel following erosion or other damage.

Apply lime and fertilizer according to soil tests, or apply 3.000-5,000 lb/acre ground agricultural limestone (use the lower rate on sandy soils) and 1,000 lb/acre 10-10-10 fertilizer.

MAINTENANCE:

Fertilize according to soil tests or apply 40 lb/acre nitrogen in January or february, 40 lb in September and 40 lb in November, from a 12-4-8, 16-4-8, or similar turf fertilizer. Avoid fertilizer applications during warm weather, as this increases stand losses to disease. Reseed, fertilize, and mulch damaged areas immediately. mow to a height of 2.5-3.5 inches as needed.

SPRING & SUMMER:


April 1 - July 15

Apply lime and fertilizer according to soil tests, or apply 3,000 lb/acre ground agriculture limestone and 500 lb/acre 10-10-10 fertilizer.


MAINTENANCE:


Refertilize the following april with 50 lb/acre nitrogen. Repeat as growth requires. may be moved only once a year. Where a neat appearance is desired, omit sericea and mow as often as needed.

apply 4,000 lb/acre straw. anchor straw by tacking with asphalt, netting, or a mulch anchoring tool. A disk with blades set nearly straight can be used as a mulch anchoring tool.

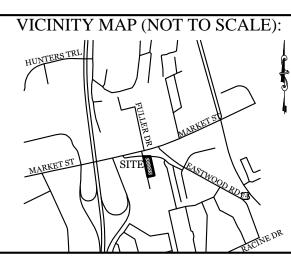

REVISIONS



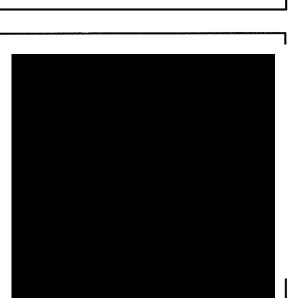

CLIENT INFORMATION:


CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662

DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	1" = 40'
PROJECT NUMBER:		2021-024	

DRAWING NUMBER:





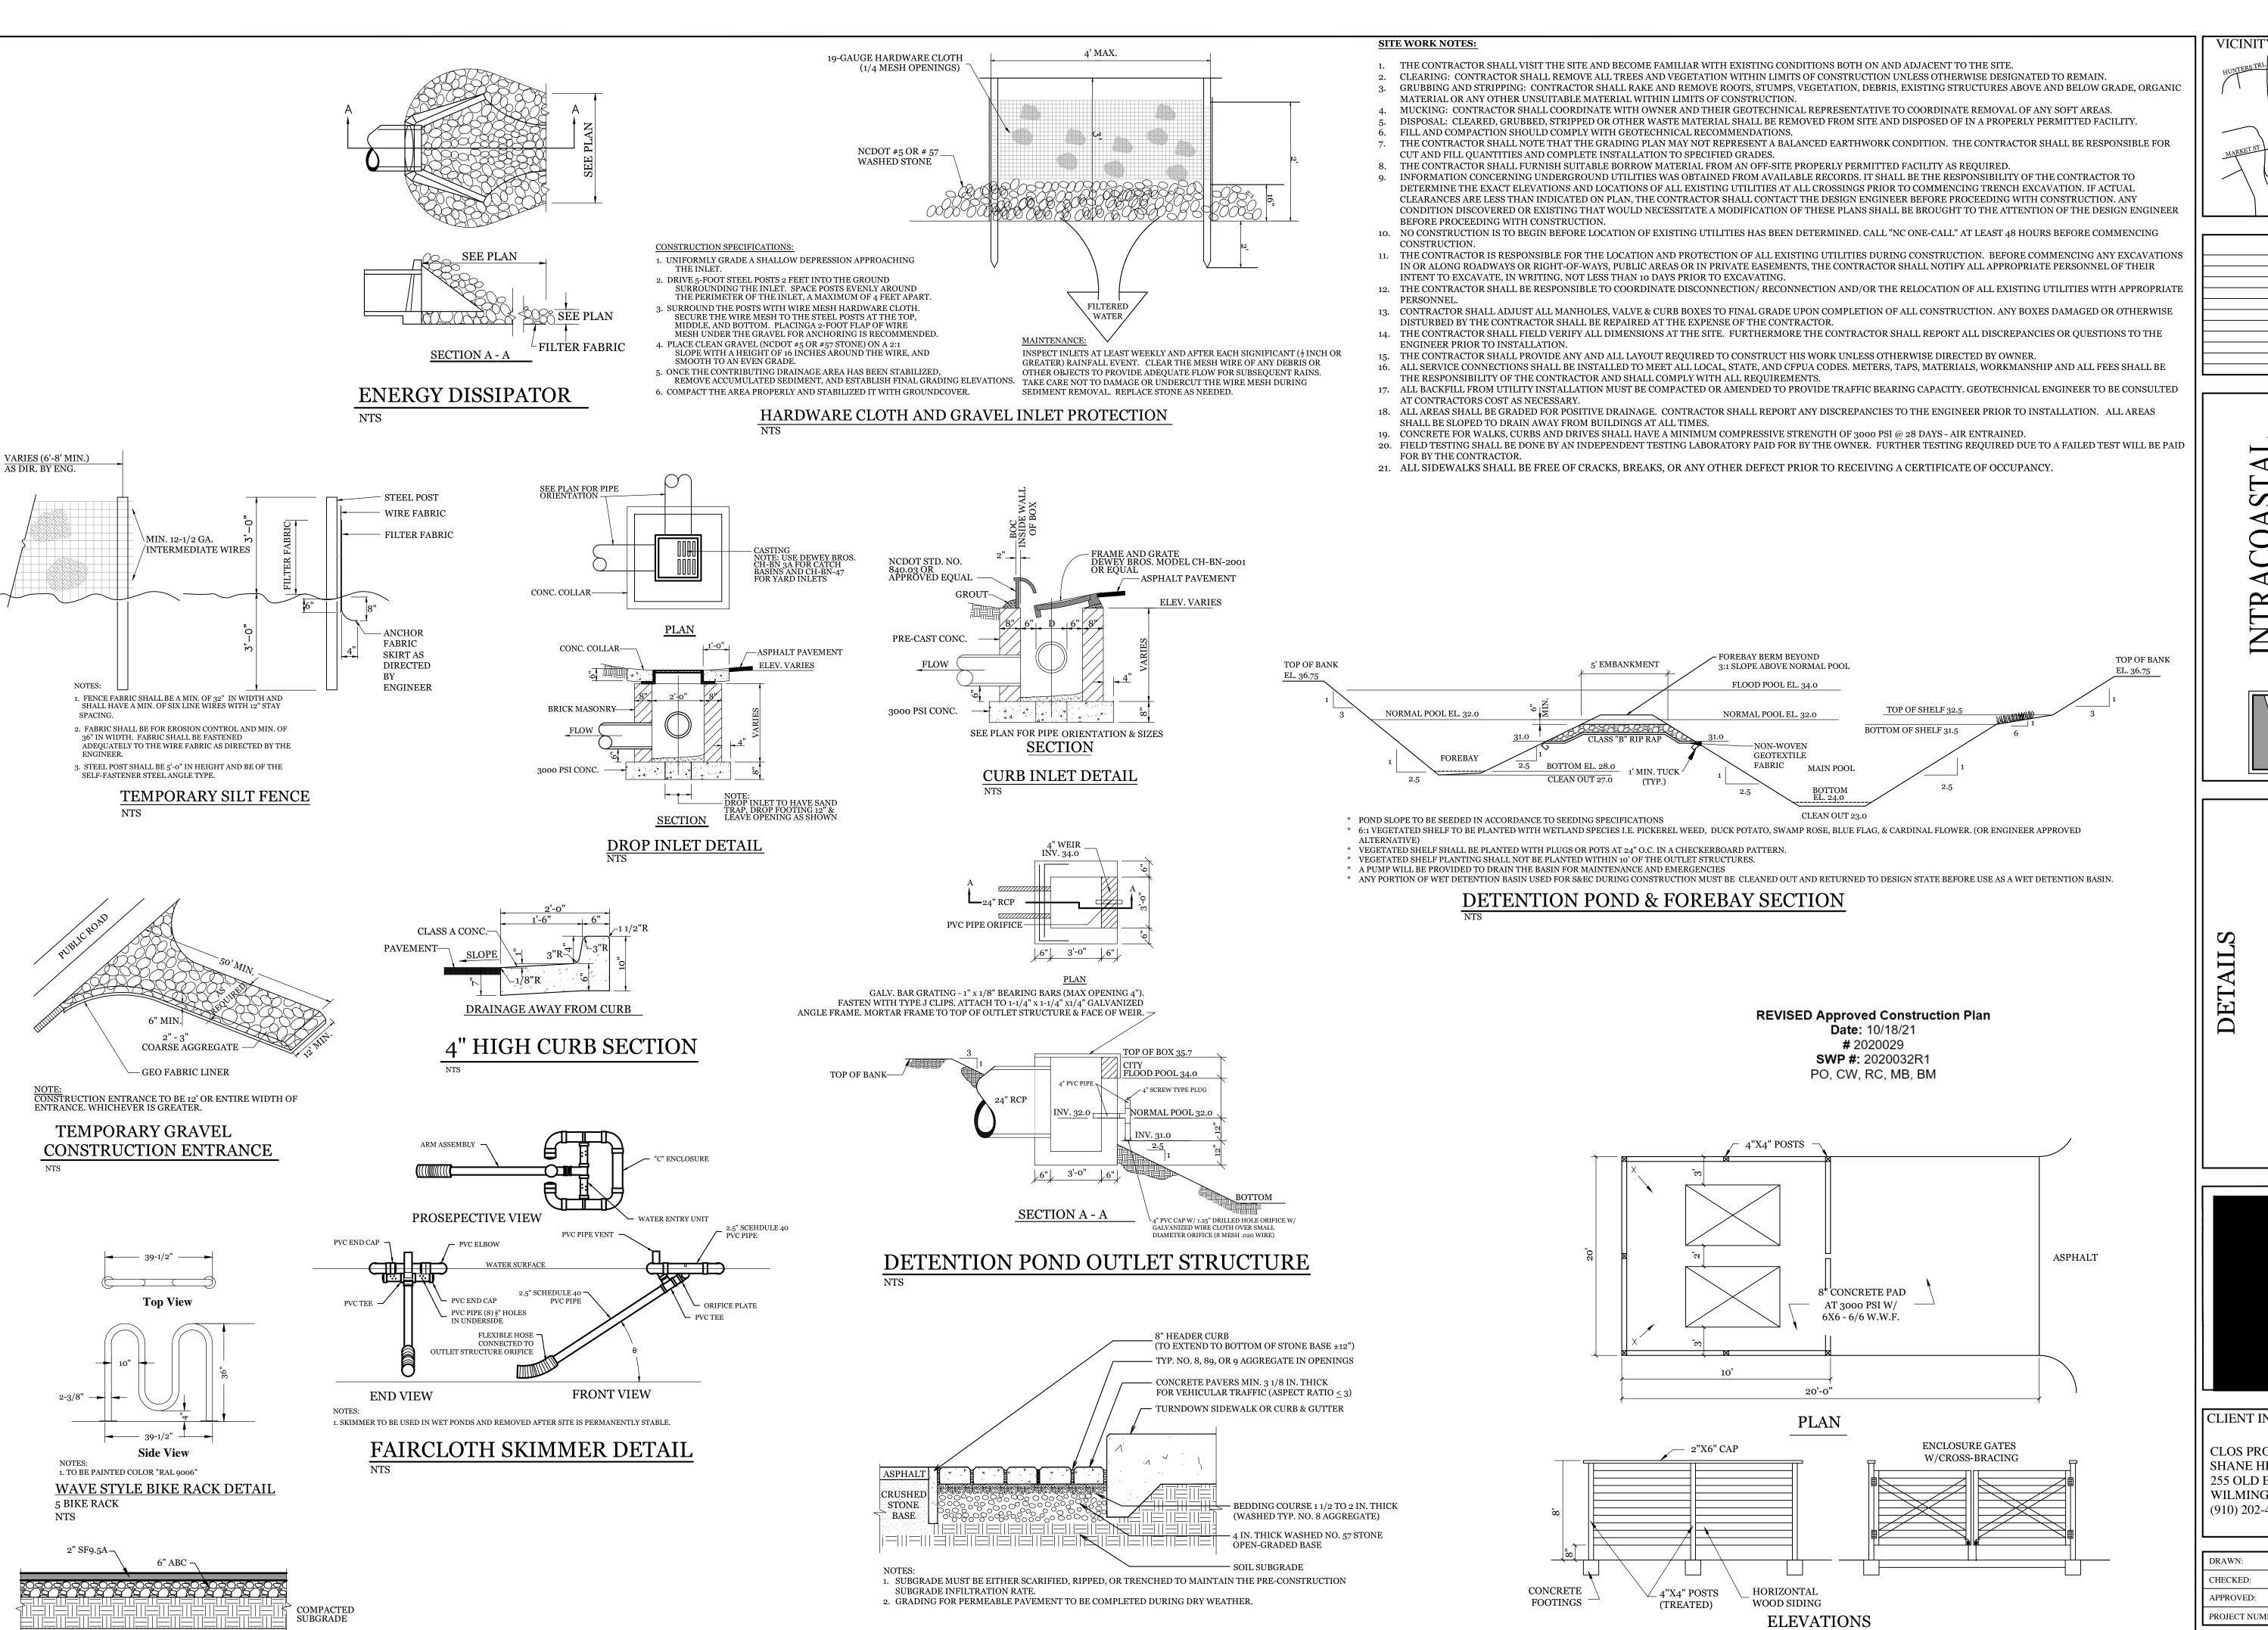

PERMEABLE PAVER SECTION

PARKING ASPHALT SECTION

VICINITY MAP (NOT TO SCALE):

HUNTERS TRL

MARKET ST


SITE

RACINE DR

REVISIONS

Om mos

INTRACOASTAL
NGINEERING, PLLC
5725 Oleander Dr. Unit E-7
Wilmington, North Carolina 28403
Phone: 910 859 8983



FOR GOUP 2

CAPE FEAR MC




CLIENT INFORMATION:


CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662


DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	NTS
PROJECT NUMBER:		2021-024	


DRAWING NUMBER:

DUMPSTER PAD & ENCLOSURE DETAIL




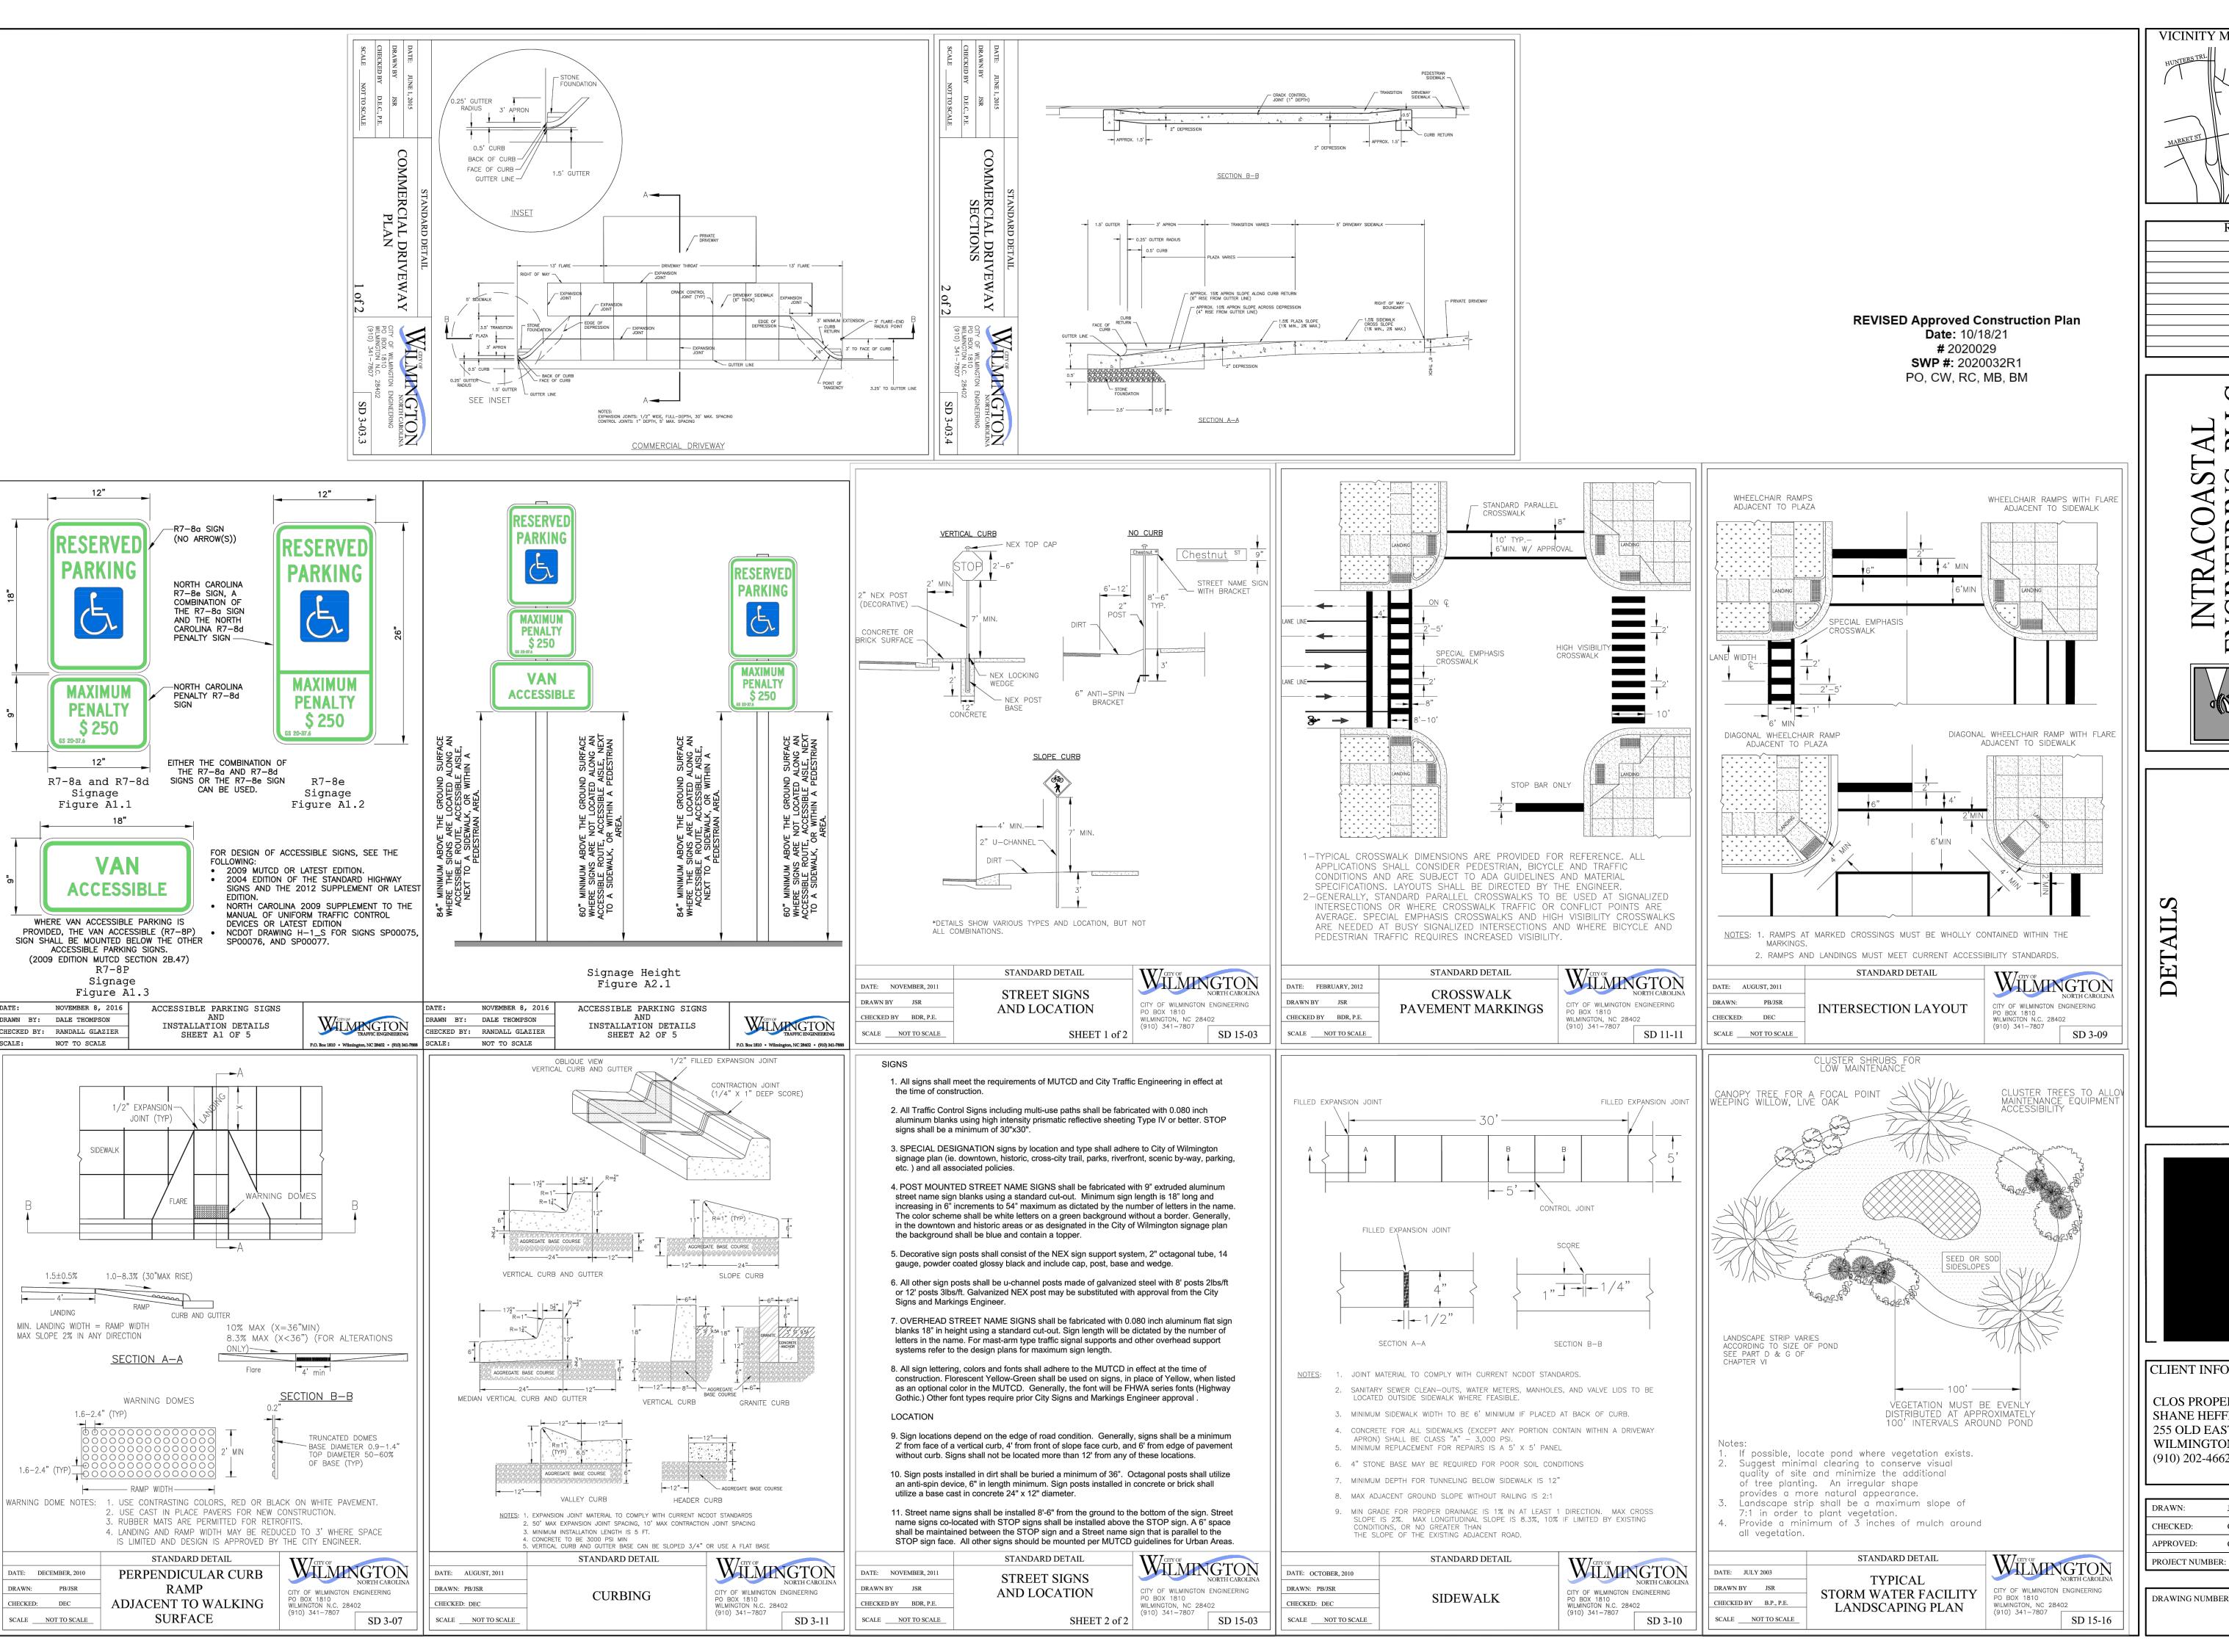

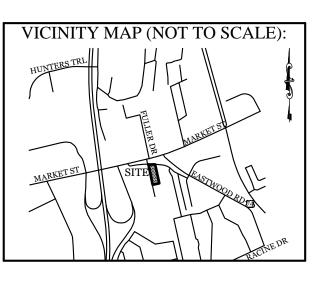

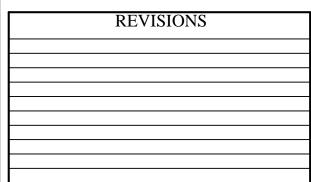


PL




CLIENT INFORMATION:


CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662


DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	NTS
PROJECT NUMBER:		2021-024	

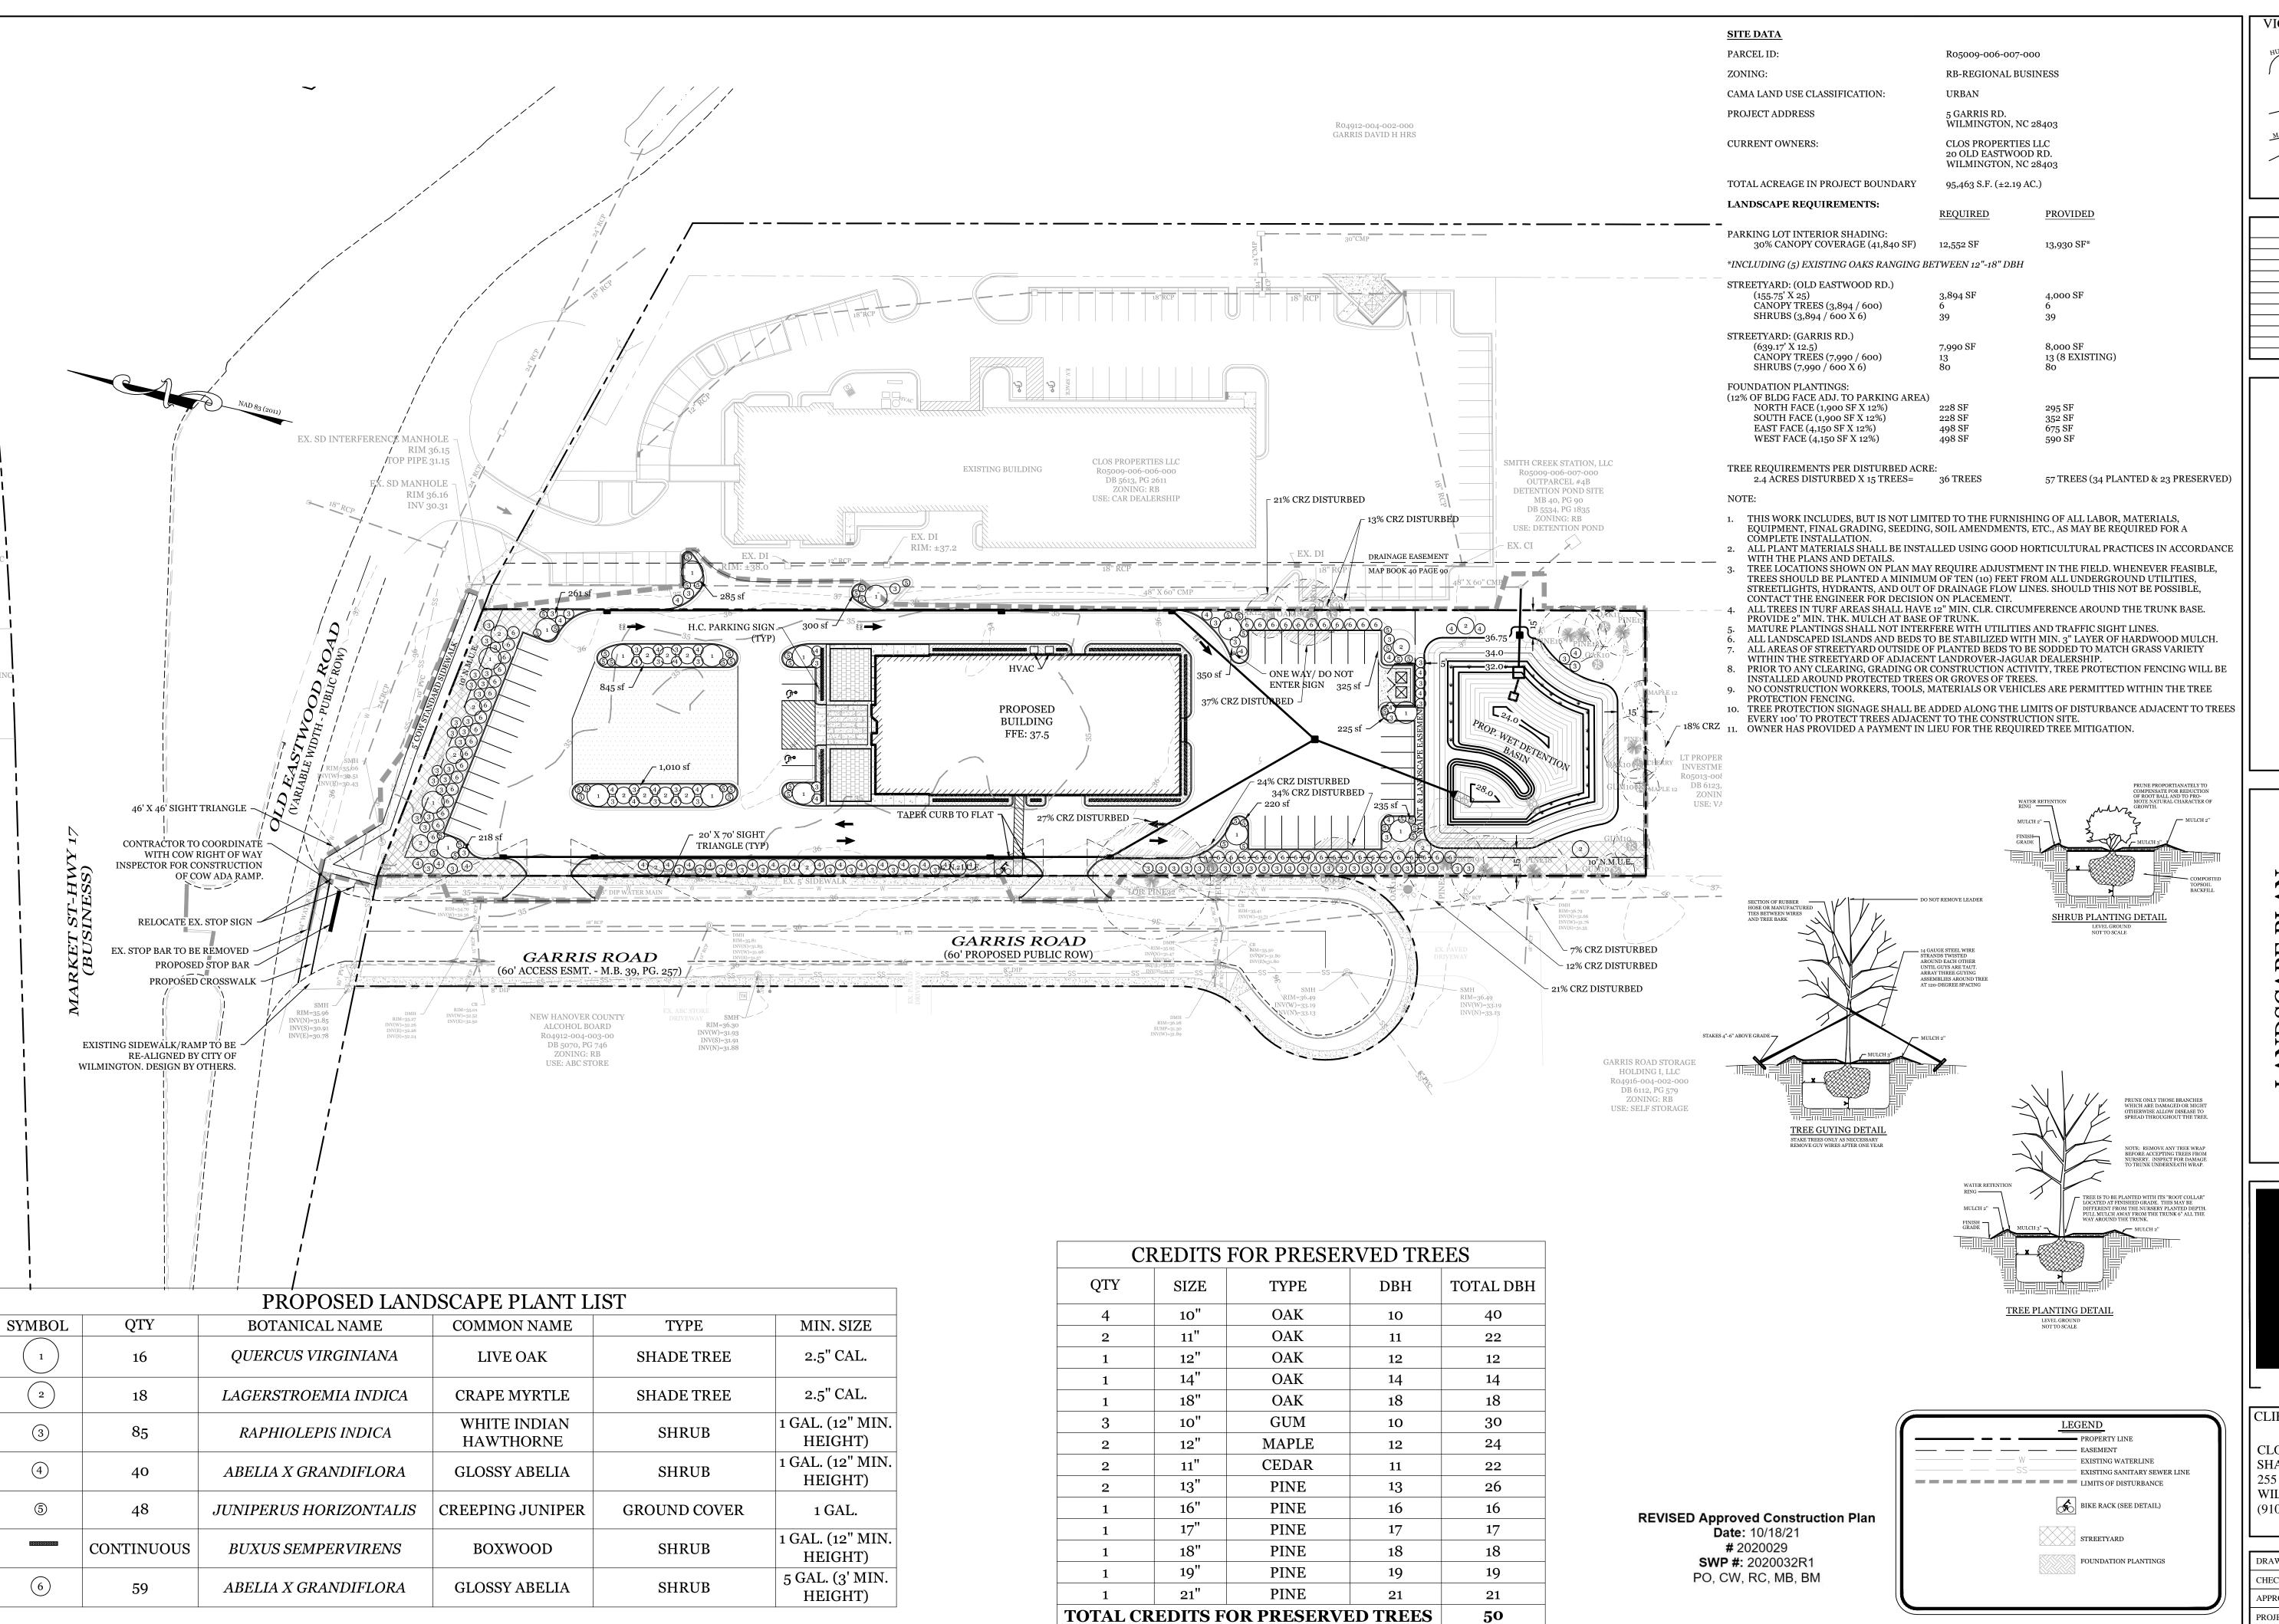

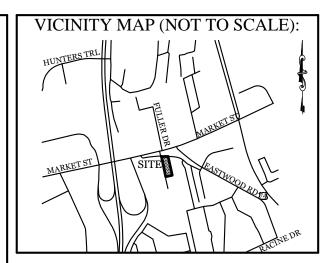

REVISIONS



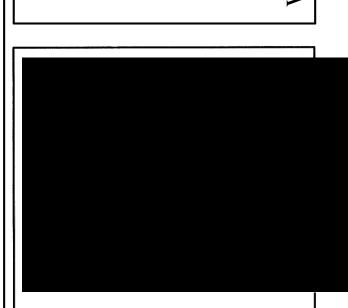

CLIENT INFORMATION:

*

CLOS PROPERTIES, LLC SHANE HEFFERNAN 255 OLD EASTWOOD ROAD WILMINGTON, NC 28403 (910) 202-4662

DRAWN:	JAE	SHEET SIZE:	24 X 36
CHECKED:	CDC	DATE:	9/23/2021
APPROVED:	CDC	SCALE:	1" = 40'
PROJECT NUMBER:		2021-024	

DRAWING NUMBER: L-1

Scale: 1"=40'

205 TREES REQUIRED FOR MITIGATION - 50 TREE CREDITS = 155 TREES REQUIRED FOR MITIGATION